## **Downlighting**

# LIGHTOLIER

Calculite LED 4" gen 3





C4RA Round AirsSeal IC frame

Calculite LED 4" generation 3 provides excellent performance coupled with optimized installation flexibility. Industry leading visual comfort and uniform illumination make it an ideal choice for open office, institution, healthcare, and retail applications.

Project:	
Location:	
Cat.No:	
Type:	
Qty:	
Notes:	

Eallow the a	rdorina auidolin	ae halaw. Each etan	is a separate order line

Step 1	Frame: Ordered & shipped separately.		
	Frame 4RA		Example: 4RA
Step 2	Engine & Trim: Ordered & shipped as a single product.		
	Engine C4L	-C4R	Example: C4L15835NZ10U-C4RDLCCP
Step 3 (optional)	Accessories: Ordered & shipped separately.		

example: 4RA Frame

Series	Aperture	Installation			
4	R	A			
4 4" New Construction	R Round	<b>A</b> AirSeal IC 120/277/347V <sup>1</sup>			

example: C4L15835NZ10U **Engine** 

Series	Lumens	CRI/CCT	Beam	Dimming	Options	Voltage
C4L						
C4L Calculite LED 4"	<b>05</b> 500 lm <b>10</b> 1000 lm	927 90CRI/2700K 930 90CRI/3000K	N Narrow (43°) <sup>3</sup> M Medium (56°) <sup>3</sup>	<b>Z10</b> 0-10 V 1%	None D2O Dim to Off	U 120/277V 3 347V (Z10 only)
gen 3	15 1500 lm 20 2000 lm	935 90CRI/3500K 940 90CRI/4000K 950 90CRI/5000K <sup>2</sup>	<b>W</b> Wide (76°) <sup>4</sup>	L01 Lutron PEQ0 EcoSystem 0.1% L1 Lutron LDE1 EcoSystem (500lm not av	vailable)	U 120/277V
		D2W 90CRI/3000K to 1800K <sup>3</sup>		D DALI 0.1%	None LIN Linear	U 120/277V
		(dim-to-warm)		SOL EldoLED Solo 0-10 V 0.1% DMX Digital Multiplexing w/RDM 0.1%	None LIN Linear SQR Square	U 120/277V
				E Forward & Reverse Phase		1 120 V

example: C4RDLCCP Trim

Series	Aperture	Style	Finish	Flange
C4	R			
C4L Calculite LED 4" gen 3	R Round	DL Downlight WW Open Wall Wash <sup>4</sup> LW Lensed Wall Wash <sup>4</sup> CW Corner Wall Wash <sup>4,5</sup> DW Double Wall Wash <sup>4,5</sup>	CL Specular clear CC Comfort clear CD Comfort clear diffuse CZ Champagne bronze BK Black (anodized)	<ul> <li>White (matte)</li> <li>Polished (matches aperture)</li> <li>Flangeless (requires CA4RFT)</li> </ul>
			WH White (matte) WHAMF White (gloss antimicrobial)	<ul><li>White (matches finish)</li><li>F Flangeless (requires CA4RFT)</li></ul>

See footnotes on page 2.















### Round AirsSeal IC frame

#### Accessories

SWCS Interact Ready System Bridge Accessory with integral occupancy and daylight sensor (compatible with all 0-10V options, see SWCS spec sheet) 6

7920 4" sloped ceiling adapter (refer to SCA spec sheet for slope options)

CA4RFT Mud-in ring for use with flangeless installations (ordered with a flangeless trim)

#### **Round Downlight**

#### Photometric - Downlights with CRI of 90+ & R9 of 50+

Lumen		Flux	Efficacy	Beam				IES	TM-30	)-18	
Package	Beam	(lm)	(lm/W)	Angle	СВСР	CRI	R9	$R_{\rm f}$	R <sub>g</sub>	R <sub>cs,h1</sub>	UGR
500 lm	Narrow (N)	609	101	39°	1409	90+	50+	91	100	-6%	0
	Medium (M)	625	102	53°	769	90+	50+	91	99	-6%	0
	Wide (W)	570	93	69°	378	90+	50+	91	99	-6%	0
1000 lm	Narrow (N)	905	104	39°	2094	90+	50+	91	100	-6%	0
	Medium (M)	1056	105	53°	1300	90+	50+	91	99	-6%	0
	Wide (W)	963	95	69°	638	90+	50+	91	99	-6%	0
1500 lm	Narrow (N)	1347	101	39°	3118	90+	50+	91	100	-6%	1
	Medium (M)	1510	108	53°	1859	90+	50+	91	99	-6%	2
	Wide (W)	1385	99	69°	917	90+	50+	91	99	-6%	1
2000 lm	Narrow (N)	1778	101	39°	4115	90+	50+	91	100	-6%	2
	Medium (M)	1937	105	53°	2385	90+	50+	91	99	-6%	2
	Wide (W)	1779	97	69°	1178	90+	50+	91	99	-6%	2

#### **Round Wall Wash**

#### Photometric - Downlights with CRI of 90+ & R9 of 50+

Lumen	umen Flux Efficacy Be		Beam				IES TM-30-18				
Package	Beam	(lm)	(lm/W)	Angle	СВСР	CRI	R9	$R_f$	$R_g$	R <sub>cs,h1</sub>	UGR
500 lm	Open (WW)	555	91	_	-	90+	50+	91	99	-6%	10
	Lensed (LW)	396	65	_	-	90+	50+	91	99	-6%	16
1000 lm	Open (WW)	937	93	_	-	90+	50+	91	99	-6%	12
	Lensed (LW)	668	66	_	-	90+	50+	91	99	-6%	18
1500 lm	Open (WW)	1348	96	_	-	90+	50+	91	99	-6%	13
	Lensed (LW)	961	69	-	-	90+	50+	91	99	-6%	19
2000 lm	Open (WW)	1731	94	_	-	90+	50+	91	99	-6%	14
	Lensed (LW)	1234	67	-	_	90+	50+	91	99	-6%	20



## AccuRender Technology (CRI 90+)

The right light brings colors to life. Our new AccuRender technology helps ensure colors are rendered more accurately and consistently, while doing so as efficiently as CRI 80 products.



Standard CRI 80

Good color rendering and high efficacy



Standard CRI 90

Better color rendering and low efficacy



AccuRender

Best color rendering, color preference and high efficacy

#### Enjoy design flexibility

#### Full range of products and options:

- Available soon in across Lightolier portfolio for application flexibility
- Multiple color temperatures (CCTs) and lumen packages offered

#### **Promote savings**

### High efficacy, with no penalty:

- Energy efficacy compares well to conventional 80 CRI
- Up to 25% more energy savings vs competitor 90 CRI¹
- Helps meet Title 24 requirements

#### Show your true colors

#### High color rendering:

- True to life colors that help energize your environment and render better flesh tones critical for healthcare hospitality and retail applications.
- R<sub>a</sub> up to 94 CRI
   R<sub>f</sub> up to 92 TM-30
   R<sub>g</sub> up to 67 CRI
   R<sub>th1</sub> up to 91 TM-30
   G<sub>a</sub> up to 99 CRI
   R<sub>g</sub> up to 100 TM-30
   C<sub>g</sub> up to 94 CRI
   R<sub>cs,M</sub> up to -5% TM-30

#### Achieve color balance

#### Best in class color consistency:

Promote aesthetic harmony in your space with ≤ 2 SDCM

#### Footnotes for page 1

- 1. Universal 120-347V for 0-10v (Z10) dimming only. Non-Z10 dimming options available for 120/277V only
- 2. Consult factory for 5000K CCT (50) with narrow (N) beam.
- Dim-to-warm (D2W) available only with Z10 dimming up to 2000lm. Narrow (N) and medium (M) beam engines only.
- 4. Wide (W) beam is ideal for all Wall Wash (LW, WW, CW, DW) applications.
- 5. Corner (CW) and Double (DW) Wall Wash are not available with flangeless (F) option.
- 6. Requires IRT9015 IR remote & Interact Pro App for commissionin

### Round AirsSeal IC frame

#### Frame-in-kits

#### AirSeal:

Galvanized steel housing for dry or plaster ceilings. Pre-installed telescoping mounting bars from 13" to 24".

#### Patented install Mounting frame:

With no driver attached, this versatile frame is independent of driver accommodating a wide range of lumen packages, driver types and CCTs, including 120V and 277V inputs.

Close-cut aperture design eliminates possibility of gap between ceiling opening & reflector flange.

Separate wiring compartment for wiring frame to building allows inspection prior to light engine install.

Simple plug-and-play connection between frame and light engine from below ceiling eliminates need for wiring between frame and LED driver, and also saves time during installation and future replacements/upgrades. Plug-and-play receptacle accommodates technology upgrade of light engines and replacements for the life of the building.

#### **Dimming**

All configurations are FCC Class A unless otherwise specified.

- Advance 0-10V 1% (Z10), logarithmic curve is standard, specify D2O for factory-set dim-to-off function, consult factory for linear dimming curve.
- EldoLED SOLODrive (SOL) 0-10V 0.1%
- · Lutron PEQ0 (L01) Hi-Lume Premier EcoSystem 0.1%
- · Lutron LDE1 (L1) EcoSystem 1%
- Electronic low voltage (E) forward or reverse phase dimming, remodel and AirSeal IC Shallow are FCC Class B
- DALI (D) DT6 DALI 0.1%
- DMX (DMX) Digital multiplexing with RDM 0.1%
- Dim to Warm (D2W): option changes CCT from 3000-1800K gradually as it dims. Use with Z10 dimming only. Fixture-to-fixture consistency of ≤3SDCM at 2700K & 3000K, and ≤5SDCM at 1800K.

#### Dimming options:

The following are factory-set for the SOL, D, and DMX driver options (ex. DMXLIN):

- SOL/D/DMX: Logarithmic (-) standard
- SOL/D/DMX: Linear (LIN)
- · SOL/DMX: Square (SQR)

#### **Optical systems**

#### Comfort throughout the space:

Patented optical system combines primary and secondary optics to provide a true 50° physical cutoff and 45° reflected cutoff virtually eliminating the view of the light source and bright spots in the reflector. A new reflector curve reduces reflector brightness by up to 50% compared to existing products, allowing for the use of higher lumen packages in smaller apertures without creating bright spots in the ceiling.

#### MesoOptics PET optical diffusion film:

provides a smooth beam shape and mitigates color over angle with optimized luminaire efficiency. Mitigates LED pixilation.

#### Quality of light:

2 SDCM ensures color consistency from fixture to fixture and over the luminaire's long lifetime. Proprietary optical grade silicone lens with patterned surface provides soft, even beam diffusion without hotspots or dark rings.

#### **Light Engine**

Quick connect power pack comprised of light source and driver allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for:

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- Ease and upgradability of technology.
- 347V light engines are 0-10v dimming only and include dedicated 347V driver for use with universal 120/277/347V (U) frames. All other dimming options available only for 120/277V input.

#### **Options and Accessories**

Flangeless mud-in ring: Use CA4RFT: For use with flangless plaster installations.

**Sloped ceilings:** Compatible with sloped ceiling adapters (see **SCA** spec sheet). Requires pilot holes to be drilled out in bottom of frame.

SWCS: Interact Ready System Bridge Accessory. Requires IRT9015 IR remote and Interact Pro App for commissioning. Specify with integral occupancy and daylight sensing capabilities for controls and compatibility with Interact Pro.

#### Title 24 exceptions

- 1000 m in Downlight, Wall Wash & Lensed Wall Wash configurations
- Champagne Bronze & Black finishes

#### **Labels and Listings**

- cULus listed for wet locations
- RoHS certified
- CEC Title 24 JA8 certified
- Red List Declare label certified, ID SIG-0021 (View full Declare label)

#### Warranty



5 year limited warranty Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

### Round AirsSeal IC frame

#### Reflector



Specular clear (CL): Most specular and most efficient finish, delivers maximum photometric performance but can produce a mirror image effect of the interior space.



**Comfort clear (CC):** Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



Comfort clear diffuse (CD): Slightly diffuse clear finish, that eliminates iridescence and reduces the mirror image effect inherent with specular finishes.



Champagne bronze (CZ): Semi-specular finish that softens light at the source of the reflector while providing a warmer reflector appearance (slightly warmer).



White (WH): (matte) Brightest illuminated aperture and provides the smoothest transition to most ceilings when off (white is only available with a white flange).



**Black (BK):** (anodized) Specular finish that provides the lowest aperture brightness possible and significantly reduces source identification in a ceiling.

#### **Flanges**



White (-): (matte) Provides the smoothest transition to ceilings when off.



**Polished (P):** (matches aperture) Produces a continuous look throughout the reflector (aperture matching).




Flangeless (F): (flush-mount)Creates a flush, virtually seamless transition from aperture to ceiling.




Mud-in ring (FT): Low profile, machined aluminum mud-in ring provides a raised rib to plaster up to and a 3/16" flange thickness. The ring is attached to the ceiling material as opposed to the frame-in kit to avoid conduction of heat and vibration which can cause yellowing or cracking of the plaster.

### Round AirsSeal IC frame

### AirSeal (A)

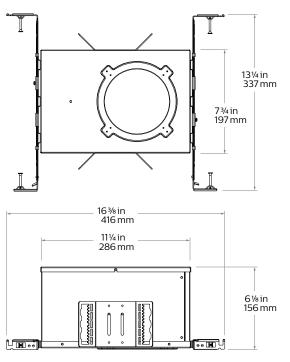

#### Flangeless mud-in ring (CA4RFT) accessory

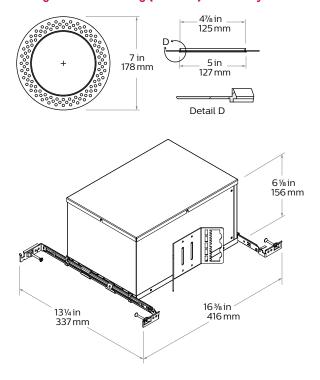

#### **Electrical - Narrow**

Light	Input	Input	Input	Drive Input		LED	THD Factor	Power Factor
engine	Volts	Freq.	Current	Current		Power	@ Max	Load
	120V	50/60Hz	0.050A	0.15A	6.0W	4.8W	<10%	>0.9
500lm	277V	50/60Hz	0.023A	0.15A	6.3W	4.8W	<30%	>0.9
	347V	50/60Hz	0.020A	0.15A	7.0W	4.8W	N/A	>0.9
	120V	50/60Hz	0.072A	0.22A	8.7W	7.1W	<10%	>0.9
1000lm	277V	50/60Hz	0.032A	0.22A	8.9W	7.1W	<20%	>0.9
	347V	50/60Hz	0.029A	0.22A	10.1W	7.1W	<30%	>0.9
	120V	50/60Hz	0.108A	0.33A	12.9W	10.8W	<10%	>0.9
1500lm	277V	50/60Hz	0.047A	0.33A	13.0W	10.8W	<10%	>0.9
	347V	50/60Hz	0.043A	0.33A	14.8W	10.8W	<25%	>0.9
	120V	50/60Hz	0.147A	0.45A	17.6W	14.9W	<10%	>0.9
2000lm	277V	50/60Hz	0.064A	0.45A	17.7W	14.9W	<10%	>0.9
	347V	50/60Hz	0.056A	0.45A	19.6W	14.9W	<20%	>0.9


### Lifetime (TM-21) data

Lumens	Narrow beam	Medium/Wide beam
500lm 1000lm 1500lm	L85 @ 55,000hrs.	L90 @ 60,000hrs.
2000lm	L85 @ 55,000hrs.	L80 @ 60,000hrs.

#### Electrical - Medium & Wide

Light		lmm.ub		Drive	Input	LED	THD Factor	Power Factor
engine	Input Volts	Input Freq.	Input Current	Current	Power	Power	@ Max	Load
	120V	50/60Hz	0.051A	0.15A	6.1W	4.8W	<10%	>0.9
500lm	277V	50/60Hz	0.023A	0.15A	6.4W	4.8W	<30%	>0.9
	347V	50/60Hz	0.020A	0.15A	7.1W	4.8W	N/A	>0.9
	120V	50/60Hz	0.084A	0.25A	10.1W	8.3W	<10%	>0.9
1000lm	277V	50/60Hz	0.037A	0.25A	10.3W	8.3W	<10%	>0.9
	347V	50/60Hz	0.034A	0.25A	11.7W	8.3W	<30%	>0.9
	120V	50/60Hz	0.117A	0.36A	14.0W	11.8W	<10%	>0.9
1500lm	277V	50/60Hz	0.051A	0.36A	14.1W	11.8W	<10%	>0.9
	347V	50/60Hz	0.046A	0.36A	16.0W	11.8W	<25%	>0.9
	120V	50/60Hz	0.153A	0.47A	18.4W	15.5W	<10%	>0.9
2000lm	277V	50/60Hz	0.067A	0.47A	18.5W	15.5W	<10%	>0.9
	347V	50/60Hz	0.059A	0.47A	20.3W	15.5W	<20%	>0.9

#### Dim-to-Warm: CCT vs Dimmed level



## Round AirsSeal IC frame


interact		The state of the s		
			Gatew	ay Connected
		Standalone	Option 1	Option 2
Dimming, grouping, and zoning		<b>✓</b>	<b>✓</b>	<b>~</b>
Bluetooth and ZigBee enabled		<b>✓</b>	<b>✓</b>	<b>~</b>
Motion sensing and daylight harvesting		<b>✓</b>	<b>✓</b>	<b>~</b>
Integration with 0-10V and phase dimming fixtures		<b>/</b>	<b>✓</b>	<b>~</b>
Code compliance		<b>/</b>	<b>/</b>	<b>~</b>
Granular dimming and dwell time		<b>✓</b>	<b>/</b>	<b>~</b>
Correlated color temperature (CCT) tuning by switch	New	<b>✓</b>	<b>✓</b>	<b>~</b>
Support for sensor-based Tunable White luminaires	New	<b>✓</b>	<b>/</b>	<b>~</b>
Energy reporting and monitoring			<b>/</b>	<b>~</b>
Scheduling			<b>/</b>	<b>~</b>
Demand response			<b>✓</b>	<b>~</b>
BMS integration (BACnet)				<b>~</b>
Floor plan visualization				<u> </u>
IoT sensors for wellness				<b>~</b>
IoT Apps for productivity				<b>~</b>

#### Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
Luminaires with integrated sensors	150
Smart TLEDS	150
· Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
• Sensors	30
· Switches	50

Group level	
Recommended number of lights	40 (maximum 150)
Number of ZGP devices	5
Number of scenes	16

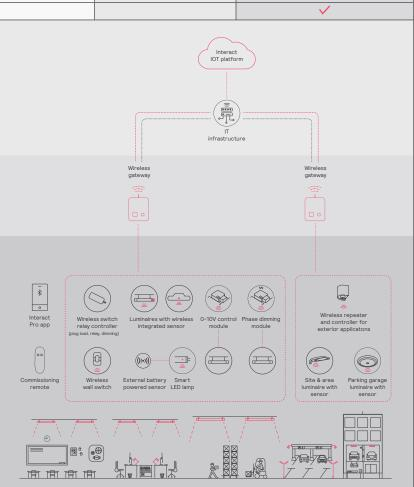

dilatin

### Round AirsSeal IC frame

#### Wireless controls options

#### Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity.
   The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

#### Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

#### Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity.
   The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

#### Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSORIA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available. Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

#### **Emergency Options (ER100)**

- Power Sensing (factory default) –
  Recommended UL924 option requires unswitched
  power sense line, absence of voltage on the
  normal circuit triggers luminaire to 100% output.
- Power Interruption Detection (field option) –
  Detects AC power interruption >30ms triggers
  90 minute emergency mode with luminaire at
  100% output.


### Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

## Round AirsSeal IC frame

#### Narrow beam, 1500lm Engine, 117lm/W at 13W

#### Candela Curve



#### 4RA / C4L15935N / C4RDLCL

Output lumens:	1492 lms
Input watts:	12.8 W
CRI:	90 min
CCT1:	3500K
Spacing Crit.:	0.62
Beam Angle:	36°

#### Zonal summary

Zone	Lumens	%Luminaire
0-30	1322	88.6%
0-40	1437	96.3%
0-60	1490	99.9%
0-90	1492	100.0%

Angle	Mean CP	Lumens
0	3676	
5	3512	
10	3039	320
15	2364	
20	1536	639
25	769	
30	312	363
35	171	
40	135	115
45	64	
50	8	51
55	2	
60	1	2
65	1	
70	0	1
75	0	
80	0 0 0	0
85	0	
90	0	0

#### Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
8'	102	4.8'
9'	80	5.4'
10'	65	6.0'
12'	45	6.6'
14'	19	8.7'

<sup>\*</sup> Beam diameter is where foot-candles drop to 50% of maximum.

#### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
8'	63.0	0.57
9'	42.0	0.37
10'	30.0	0.27
12'	25.0	0.22
14'	20.0	0.18
001 001 401		

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 116.6 lm/W Report<sup>2</sup>: STMR-2974

#### Adjustment factors


Finish	CCT	Lumens
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%

#### Coefficients of utilization

Ceiling		80%		70	1%	50	)%	30	)%	0%		
Wal	I	70	50	30	10	50	10	50	10	50	10	0
RCR		Zona	al cav	ity me	ethod	- Eff	ectiv	e floo	r refl	ectar	nce =	20%
	0	119	119	119	119	116	116	111	111	106	106	100
0	1	114	112	110	108	110	106	106	103	102	100	95
Room Cavity Ratio	2	110	106	103	100	104	99	101	96	98	94	91
20	3	106	100	96	93	99	92	97	91	94	89	87
ΞĒ	4	102	96	91	88	94	87	92	86	91	85	83
á	5	98	91	86	83	90	82	89	82	87	81	79
Ö	6	94	87	82	79	86	78	85	78	84	77	76
o	7	91	83	78	75	83	75	82	74	80	74	73
2	8	88	80	75	72	79	72	78	71	77	71	70
	9	85	77	72	69	76	69	75	68	75	68	67
	10	82	74	69	66	73	66	73	66	72	66	64

#### Medium beam, 1500lm Engine, 108 lm/W at 14W

#### Candela Curve



#### 4RA / C4L15935M / C4RDLCL

Output lumens:	1510 lms
Input watts:	14.0 W
CRI:	90 min
CCT1:	3500K
Spacing Crit.:	0.92
Beam Angle:	54°

#### Zonal summary

Zone	Lumens	%Luminaire
0-30	1242	82.3%
0-40	1450	96.0%
0-60	1508	99.9%
0-90	1510	100.0%

Angle	Mean CP	Lumens
0	1859	
5	1871	
10	1924	180
15	1910	
20	1677	527
25	1204	
30	661	535
35	307	
40	154	208
45	69	
50	9	55
55	2	
60	1	3
65	1	
70	0	1
75		
80	0	0
85	0	
00	آ م	0

#### Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	74	4.6'
6'	52	5.5'
7'	38	6.4'
8'	29	7.4'
9'	23	8.3'

<sup>\*</sup> Beam diameter is where foot-candles drop to 50% of maximum.

#### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.					
5'	70.0	0.62					
6'	46.0	0.41					
7'	32.0	0.29					
8'	27.0	0.24					
9'	22.0	0.19					
38' v 38' v 10' Room Workplane 2 5'							

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 107.9 lm/W Report<sup>2</sup>: STMR-1613

#### Adjustment factors

Finish	CCT	Lumens			
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%			

#### Coefficients of utilization

Се	ling	80% 70% 50% 30%		0%								
Wa	II	70	50	30	10	50	10	50	10	50	10	0
RCR		Zona	al cav	ity me	ethod	- Eff	ectiv	e floo	r refl	ectar	ice =	20%
	0	119	119	119	119	116	116	111	111	106	106	100
0	1	114	111	109	107	109	105	105	102	101	99	94
ij	2	109	104	101	97	103	96	99	94	96	92	89
20	3	104	98	93	90	97	89	94	88	92	86	83
Room Cavity Ratio	4	99	92	87	83	91	83	89	82	87	81	79
a	5	95	87	82	78	86	77	84	77	83	76	74
Ö	6	90	82	77	73	81	72	80	72	79	72	70
0	7	86	78	72	68	77	68	76	68	75	67	66
8	8	83	74	68	64	73	64	72	64	71	64	62
	9	79	70	65	61	70	61	69	61	68	60	59
	10	76	67	61	58	66	58	65	57	65	57	56


 $<sup>1. \</sup> Correlated \ Color \ Temperature \ within specs \ as \ defined in ANSI\_NEMA\_ANSLG \ C78.377-2008: \ Specifications for the Chromaticity of Solid \ State \ Lighting \ Products.$ 

<sup>2.</sup> Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

# Round AirsSeal IC frame

#### Wide beam, 1500lm Engine, 99 lm/W at 14W

#### Candela Curve



#### 4RA / C4L15935W / C4RDLCL

Output lumens:	1385 lms
Input watts:	14.0 W
CRI:	90 min
CCT <sup>1</sup> :	3500K
Spacing Crit.:	1.26
Beam Angle:	67°

#### Zonal summary

Zone	Lumens	%Luminaire
0-30	886	64.0%
0-40	1264	91.3%
0-60	1384	99.9%
0-90	1385	100.0%

Angle	Mean CP	Lumens
0 5	917	
	941	
10	1025	93
15	1116	
20	1135	314
25	1063	
30	873	479
35	606	
40	366	378
45	134	
50	15	116
55	3	
60	2	4
65	1	
70	1	1
75	1 0	
80	0	C
85	0	
90	0	0

#### Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	37	6.3'
6'	25	7.6'
7'	19	8.8'
8'	14	10.1'
9'	11	11.3'

<sup>\*</sup> Beam diameter is where foot-candles drop to 50% of maximum.

#### Multiple unit data - RCR 2

	Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
	5'	63.0	0.62
	6'	42.0	0.41
	7'	29.0	0.29
	8'	25.0	0.24
	9'	20.0	0.19
-			

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 98.9 lm/W Report<sup>2</sup>: STMR-1641.1

#### Adjustment factors

Finish	CCT	Lumens
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%


#### Coefficients of utilization

Cei	ling		80	)%		70	1%	50	)%	30	)%	0%
Wal	I	70	50	30	10	50	10	50	10	50	10	0
RCR		Zona	al cav	ity me	ethod	- Eff	ectiv	e floo	r refl	ectar	ice =	20%
	0	119	119	119	119	116	116	111	111	106	106	100
0	1	113	110	108	106	108	104	104	101	100	98	93
ij	2	107	102	98	95	101	93	97	91	94	89	86
20	3	102	95	90	85	93	85	91	83	88	82	79
ΞĘ	4	96	88	82	78	87	77	85	76	83	75	73
ē,	5	91	82	76	71	81	71	79	70	77	70	67
ပ	6	86	76	70	65	75	65	74	65	72	64	62
Room Cavity Ratio	7	81	71	65	60	70	60	69	60	68	59	58
2	8	77	66	60	56	66	56	65	55	64	55	53
	9	72	62	56	52	62	52	61	51	60	51	50
	10	69	58	52	48	58	48	57	48	56	48	46

<sup>1.</sup> Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

2. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

### Round AirsSeal IC frame




#### **Lighting Data - Example**

illumination on the wall 5' down from the ceiling is 20 f.c. beneath and 21 f.c. between fixtures.

#### Adjustment factors

Finish	CCT	Lumens
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%

#### Open Wall Wash, 1500lm Engine, 96 lm/W at 14W



#### 4RA / C4L15935W / C4RWWCL

Output lumens:	1348 lms
Input watts:	14.0 W
CRI:	90 min
CCT <sup>1</sup> :	3500K

Efficacy: 96.3 lm/w Report<sup>2</sup>: STMR-1614.2

#### Multiple unit data

Footcandles on wall

	2' from wall		
	40	3' on ctr	
<sub>1</sub> 1	16	13	16
Distance from ceiling in feet 71 01 6 8 2 9 5 7 8 5 7 .	30	25	30
<u>-</u> 3	32	30	32
ව 4	27	27	27
<u>≡</u> 5	20	21	20
္ 6	16	16	16
5 7	12	13	12
<del>_</del> 8	9	10	9
ပို့ 9	8	8	8
5 10	6	6	6
ä 12	5	5	6 5 4
14	4	5	4

### Multiple unit data

Footcandles on wall


- COCCOUNTATION CONTINUES				
	3' from wall			
	3' on ctr.			
_ 1	7	6	7	
Distance from ceiling in feet 71 0 6 8 2 9 9 7 8 8 7 .	13	13	13	
<u>ا</u> 2 2	19	18	19	
ნ 4	21	21	21	
<u>≣</u> 5	20	21	20	
5 6	18	18	18	
5 7	14	15	14	
<del>_</del> 8	12	12	12	
ပို့ 9	10	10	10	
to 10	8	8	8	
່ 12	7	7	7	
14	6	6	6	

#### Multiple unit data

Footcandles on wall

OotCandles on wall				
		3' from wall		
		4' on ctr.		
ı,	1	6	5	6
Distance from ceiling in feet	2	11	9	11
Ē.	2 3 4	16	13	16
g	4	17	16	17
iii	5	16	16	16
õ	5 6 7	14	14	14
lo.	7	12	12	12
₽ E	8	10	10	10
ē	9	8	8	8
sta	10	7	7	7
ä	12	6	6	6
	14	5	5	5

#### Lensed Wall Wash, 1500lm Engine, 69 lm/W at 14W



#### 4RA / C4L15935W / C4RLWCL

Output lumens:	961 lms
Input watts:	14.0 W
•	
CRI:	90 min
CCT1:	3500K

Efficacy: 68.6 lm/w Report<sup>2</sup>: STMR-1614.3

#### Multiple unit data

Footcandles on wall

	2' from wall		
	3' on ctr.		
<u>.</u> 1	19	16	19
Distance from ceiling in feet 71 O 6 8 2 9 G 7 8 8 C	29	26	29
<u>⊆</u> 3	25	24	25
p 4	20	20	20
<u>∰</u> 5	15	15	15
Š 6	11	12	11
5 7	9	9 7	9
<del>⊑</del> 8	7	7	7
ပို့ 9	6	6	6
10 E	5	5	5
i≝ 12	4 3	5 4 3	4
14	3	3	3

#### Multiple unit data

Footcandles on wall

- Cottodinarco on Maii				
	3' from wall			
	3' on ctr.			
	9	8	9	
	17	16	17	
	18	18	18	
	17	17	17	
,	15	15	15	
	12	13	12	
'	10	10	10	
:	8	9	8	
)	7	7	7	
)	6	6	6	
2	5	5	5	
1	4	4	4	
	2	9 17 18 18 17 15 15 12 10 10 8 8 7 7 6 2 5	3' on ctr  9 8 17 16 18 18 18 17 17 15 15 15 16 12 13 10 10 8 9 7 7 7 6 6 6 2 5 5	

#### Multiple unit data

Footcandles on wall

		3' from wall		
		4' on ctr.		
t.	1	7	6	5
Distance from ceiling in feet	2	12	12	14
Ë	2 3 4 5 6 7	15	13	17
gu	4	14	13	15
Ē	5	12	12	12
ŏ	6	10	10	10
Ö	7	8	8	8
Ę.	8	7	7	7
õ	9	6	6	6
sta	10	5	5	5
ä	12	5 4 3	4 3	5 4 3
	14	3	3	3

<sup>1.</sup> Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

<sup>2.</sup> Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.