

LIGHTOLIER

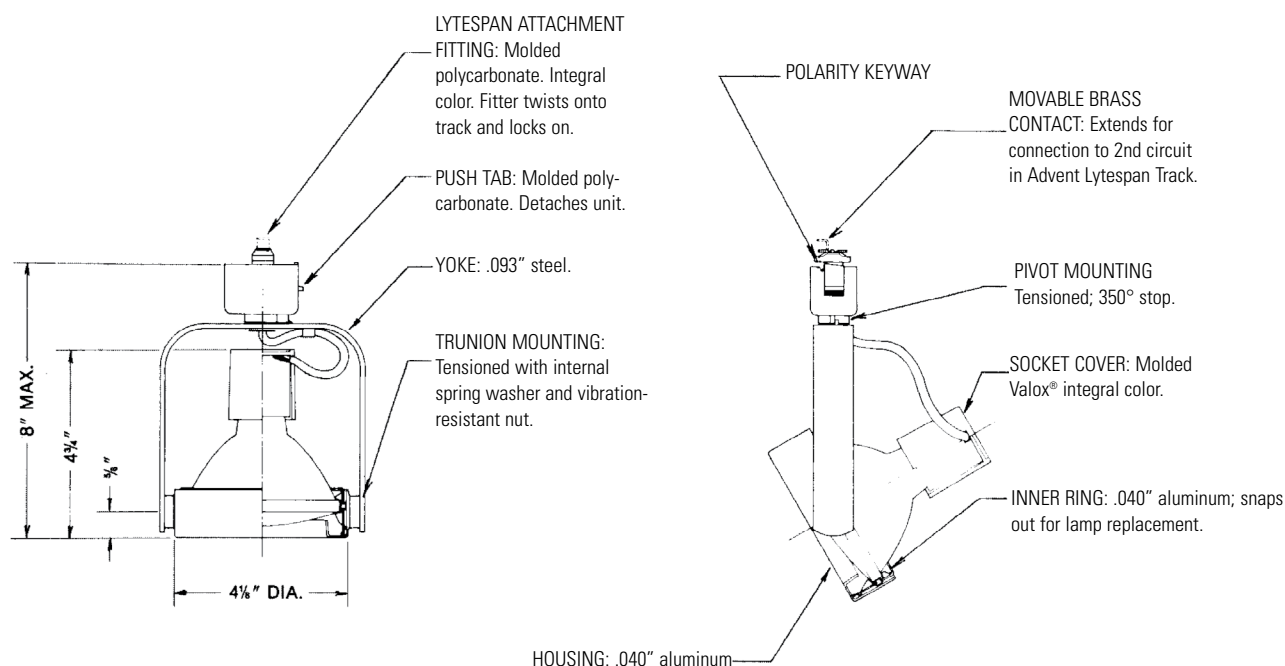
by @signify

Track Lighting

Lytespot

6282 PAR30 Ring

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____



Catalog No.	Finishes	Mounting	Lamps
6282	Matte White	All Lytespan Track	75W PAR-30 (Tungsten-Halogen)
6283	Matte Black	Systems	

6282 Lytespot

PAR30 Ring

General Description

Minimal, functional form with clearly detailed yoke and attractive ring shaped lampholder. Fixture is specially designed to use efficient, precise controlled 75W PAR-30 tungsten halogen lamp which gives a whiter, brighter light than standard incandescent reflector and PAR lamps. With a choice of narrow flood and narrow spot beam spread, they are ideal for jewelry display, sculpture and other merchandise applications. Tensioned trunion mounting allows Lytespot to remain fixed at any angle. Unit adjusts horizontally up to 350°, vertically up to 90°.

Finish

All painted finishes baked enamel.

Electrical


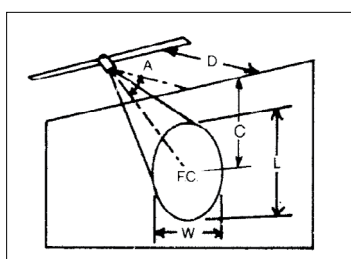
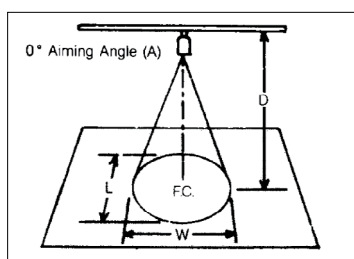
Porcelain socket, medium base, nickel plated screw shell. No. 18 braided SF-1 leads.













Labels

UL; C.S.A.; I.B.E.W.

Valox® is a trademark of General Electric.

Lighting Data



LAMP	BEAM SPREAD (To 50% Max. CP)	BEAM CTR. C.P. (Candelas)	RATED LIFE (Hours)	0° AIMING ANGLE (A)				30° AIMING ANGLE (A)				45° AIMING ANGLE (A)				60° AIMING ANGLE (A)						
				DIST- ANCE (D)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST- ANCE (D)	DIST- ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST- ANCE (D)	DIST- ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST- ANCE (D)	DIST- ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)
 50W PAR-30 NSP (T-H)	 12°	6,500	2,000	6' 8' 10' 12'	181 102 65 45	1.3' 1.7' 2.1' 2.5'	1.3' 1.7' 2.1' 2.5'	5' 7' 9' 11'	2.9' 4.0' 5.2' 6.4'	169 86 52 35	1.4' 2.0' 2.5' 3.1'	1.2' 1.7' 2.2' 2.7'	3' 5' 7' 9'	3.0' 5.0' 7.0' 9.0'	255 92 47 28	1.3' 2.1' 3.0' 3.8'	0.9' 1.5' 2.1' 2.7'	2' 3' 4' 5'	3.5' 5.2' 6.9' 8.7'	203 90 51 33	1.7' 2.6' 3.5' 4.3'	0.8' 1.3' 1.7' 2.1'
 50W PAR-30 NFL (T-H)	 32°	1,750	2,000	4' 6' 8' 10'	109 49 27 17	2.3' 3.4' 4.6' 5.7'	2.3' 3.4' 4.6' 5.7'	3' 5' 7' 9'	1.7' 2.9' 4.0' 5.2'	126 45 23 14	2.4' 3.9' 5.5' 7.1'	2.0' 3.3' 4.6' 6.0'	3' 4' 5' 6'	3.0' 4.0' 5.0' 6.0'	69 39 25 17	3.7' 5.0' 6.2' 7.5'	2.4' 3.2' 4.1' 4.9'	1' 2' 3' 4'	1.7' 3.5' 5.2' 6.9'	219 55 24 14	3.0' 6.1' 9.1' 12.2'	1.1' 2.3' 3.4' 4.6'
 50W PAR-30 FL (T-H)	 42°	1,100	2,000	3' 5' 7' 9'	122 44 22 14	2.3' 3.8' 5.4' 6.9'	2.3' 3.8' 5.4' 6.9'	3' 5' 7' 9'	1.7' 2.9' 4.0' 5.2'	79 29 15 9	3.2' 5.4' 7.5' 9.7'	2.7' 4.4' 6.2' 8.0'	2' 3' 4' 5'	2.0' 3.0' 4.0' 5.0'	97 43 24 16	3.6' 5.4' 7.2' 9.0'	2.2' 3.3' 4.3' 5.4'	1' 2' 3' 4'	1.7' 3.5' 5.2' 6.9'	138 34 15 9	5.5' 11.0' 16.5' 22.0'	1.5' 3.1' 4.6' 6.1'
 75W PAR-30 NSP (T-H)	 12°	10,500	2,000	8' 12' 16' 20'	164 73 41 26	1.7' 2.5' 3.4' 4.2'	1.7' 2.5' 3.4' 4.2'	7' 10' 13' 16'	4.0' 5.8' 7.5' 9.2'	139 68 40 27	2.0' 2.8' 3.7' 4.5'	1.7' 2.4' 3.2' 3.9'	5' 7' 9' 11'	5.0' 7.0' 9.0' 11.0'	148 76 46 31	2.1' 3.0' 3.8' 4.7'	1.5' 2.1' 2.7' 3.3'	3' 4' 5' 6'	5.2' 8.2' 10.4' 12.2'	146 82 53 36	2.6' 3.5' 4.3' 5.2'	1.3' 1.7' 2.1' 2.5'
 75W PAR-30 NFL (T-H)	 32°	3,000	2,000	6' 8' 10' 12'	83 47 30 21	3.4' 4.6' 5.7' 6.9'	3.4' 4.6' 5.7' 6.9'	5' 7' 9' 11'	2.9' 4.0' 5.2' 6.4'	78 40 24 16	3.9' 5.5' 7.1' 8.6'	3.3' 4.6' 6.0' 7.3'	3' 5' 7' 9'	3.0' 4.0' 5.0' 6.0'	118 42 22 13	3.7' 6.2' 8.7' 11.2'	2.4' 4.1' 5.7' 7.3'	2' 3' 4' 5'	3.5' 5.2' 6.9' 8.7'	94 42 23 15	6.1' 9.1' 12.2' 15.2'	2.3' 3.4' 4.6' 5.7'
 75W PAR-30 FL (T-H)	 42°	1,800	2,000	4' 6' 8' 10'	113 50 28 18	3.1' 4.6' 6.1' 7.7'	3.1' 4.6' 6.1' 7.7'	3' 5' 7' 9'	1.7' 2.9' 4.0' 5.2'	130 47 24 14	3.2' 5.4' 7.5' 9.7'	2.7' 4.4' 6.2' 8.0'	3' 4' 5' 6'	3.0' 4.0' 5.0' 6.0'	71 40 25 18	5.4' 7.2' 9.0' 10.8'	3.3' 4.3' 5.4' 6.5'	1' 2' 3' 4'	1.7' 3.5' 5.2' 6.9'	225 56 25 14	5.5' 11.0' 16.5' 22.0'	1.5' 3.1' 4.6' 6.1'

(FC) is the initial footcandles at the center of the beam.

(L) and (W) are to the point that the candlepower drops to 50% of maximum.

