

LIGHTOLIER

by @signify

Downlighting

Calculite 3"

C3SWW Square wall wash



Calculite 3" features industry leading visual comfort, excellent uniform illumination over time, and patented installation flexibility.

Complete luminaire = Frame + Engine + Trim + Accessories (optional)

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

Frame

example: 3SN

Series	Installation	Voltage / Options
3S	<input type="checkbox"/>	<input type="checkbox"/>
3S Uniframe 3" square frame	N New construction	— Universal (120V/277V) EM Emergency (see pg 2 for details & limitations) ¹ IP Interact Pro ready (for 0-10V engine only) ²
	A AirSeal IC (1000lm max)	— Standard universal (120V/277V) ³ LC Chicago plenum 3 347V (not compatible with ELV dimming) 3IP 347V with Interact Pro (for 0-10V engine only) ²
		S Shallow universal (120V/277V) ³
Note: For remodeler installations, order light engine and trim only (no frame needed)		

Engine

example: C3L10930NZ10US

Series	Lumens ⁴	CRI	CCT	Beam	Dimming	Voltage	Plenum
C3L	<input type="checkbox"/>	9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
C3L Calculite 3" light engine	05 500lm 07 750lm 10 1000lm 15 1500lm	9 90CRI	27 2700K 30 3000K 35 3500K 40 4000K	S Square	Z10 0-10V 1% L Lutron PEQ0 (Dim to 0.1%) E ELV	U Universal 120V/277V/347V 1 120V	- Standard
	10 1000lm	9 90CRI	D2W 3000K-1800K ⁵				
	07 750lm	9 90CRI	27 2700K 30 3000K 35 3500K	S Square	Z10 0-10V 1% E ELV	U Universal 120V/277V/347V 1 120V	R Remodeler ⁶ S Shallow ³

Trim

example: C3SLWDDFS

Series	Style	Reflector	Flange	Type
C3S	LW	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
C3S Calculite 3" square trim	LW Lensed wall wash (for remodeler & new construction)	CL Specular clear CC Comfort clear CD Comfort clear diffuse CZ Champagne bronze (anodized)	- White (matte) F Flangeless ⁷	- Standard depth with 50° cutoff
		BK Black (matte)	B Black (matte) F Flangeless ⁷	
		WH White (matte)	- White (matte) F Flangeless ⁷	
		WT Textured white (painted) BT Textured black (painted) BZ Bronze (painted) D Aluminum diffuse (painted)	P Matching reflector F Flangeless ⁶	

Accessories

CA3SFT	Mud-in ring for use in square flangeless trim installations (ordered with a flangeless trim)
SWZDT	SpaceWise wireless controller with dwell time functionality (compatible with all 0-10V options, see SWZDT spec sheet)
SRAINT	InterAct Office accessory (for use with Lightolier UniFrame 0-10V products)

- Emergency (EM) frame includes emergency battery with ceiling mounted test switch (no reflector mountable test switch). Requires above ceiling access. Ceiling mount test switch only (see page 2 for details and limitations).
- InterAct Pro requires above ceiling access.
- Must order shallow IC frame, shallow engine for complete shallow assembly. Standard depth trims are compatible with shallow frame.
- Lensed wall wash (LW) trims have a 1500lm (15) engine limit in Non-IC (N) configuration and 750lm limit in IC (A) configurations.
- Dim to Warm (D2W) engines are for Non-IC (N) frames only.
- For remodeler installations, order light engine and trim only (no frame needed).
- Flangeless (F) trims require CA3SFT mud-in accessory for installation.



interact
ready.

C3SWW Calculite 3"

Square wall wash

Frame-in-kits

New construction:

Galvanized stamped steel for dry or plaster ceilings. Preinstalled telescoping mounting bars from 13" to 24". For 4' distances, use 1/2" EMT, 1-1/2" x 1/2" U or C channel.

Max ceiling thickness is 1.25" (32mm)

Patented install mounting frame:

Pre-installed mounting bars for fast and tool-less installs into T-grid & hat channel ceilings.

- Close-cut aperture design eliminates possibility of gap between ceiling opening and reflector flange.
- Separate wiring compartment for wiring frame to building allows inspection prior to light engine install.
- Simple plug-and-play connection between frame and light engine from below ceiling.

Dimming

- Advance 0-10V 1% dimming
- Lutron PEQO Hi-lume Premier 0.1% EcoSystem
- ELV (consult factory)

Optical systems

Comfort throughout the space:

True 50° physical cutoff

Quality of light:

2 SDCM ensures color consistency from fixture to fixture and over the luminaire's long lifetime.

Light engine

Quick connect power pack allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for:

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- Ease and upgradability of technology.

Interact Pro (IAP)

- Requires above ceiling access for service
- Interact Pro brings the power of connected lighting to small and medium businesses without the complexity usually associated with connected lighting.
- Interact Pro includes an app, a portal and a broad portfolio of wireless Luminaires, lamps and retrofit kits all working on the same system.
- Commissioning via Interact Pro App (Android or iPhone).
- Prepare commissioning remotely via Interact Pro portal.
- Requires compatible Interact Pro Gateway and internet connectivity for commissioning.
- Compatible with UID8451/10 ZigBee Greenpower wireless dimmer switch.
- Compatible with wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) or wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact Pro visit: www.interact-lighting.com/pro.
- For more information on Interact Ready visit: www.philips.com/interact-ready.

Options and accessories

Flangeless mud-in ring: Use CA3SFT for use with flangeless plaster installations.

Labels and listings

- cULus listed for wet locations
- CCEA (frames with *LC suffix)

Warranty



5 year limited warranty

Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

0-10V electrical tables

Light engine	Input volts	Input current	Drive current	Input power
C3L05_Z10U	120 V	0.06 A	150 mA	7.0 W
	277 V	0.02 A		
C3L07_Z10U	120 V	0.08 A	220 mA	9.5 W
	277 V	0.03 A		
C3L10_Z10U	120 V	0.12 A	330 mA	13.6 W
	277 V	0.05 A		
C3L15_Z10U	120 V	0.16 A	450 mA	18.6 W
	277 V	0.07 A		
C3L18_Z10U	120 V	0.17 A	500 mA	20.4 W
	277 V	0.07 A		
C3L07_Z10US C3L07_Z10UR	120 V	0.08 A	220 mA	9.4 W
	277 V	0.03 A		
C3L10_Z10UR C3L10_Z10US	120 V	0.12 A	330 mA	14.1 W
	277 V	0.05 A		

ELV electrical tables

Light engine	Input volts	Input current	Drive current	Input power
C3L05_E1	120 V	0.05 A	150 mA	5.4 W
	277 V	0.02 A		
C3L07_E1	120 V	0.08 A	220 mA	8.7 W
	277 V	0.03 A		
C3L10_E1	120 V	0.11 A	330 mA	13.2 W
	277 V	0.05 A		
C3L15_E1	120 V	0.15 A	450 mA	17.4 W
	277 V	0.06 A		
C3L18_E1	120 V	0.17 A	500 mA	19.7 W
	277 V	0.07 A		
C3_A05_E1S C3_A05_E1R	120 V	0.08 A	220 mA	8.7 W
	277 V	0.03 A		
C3_A10_E1R C3_A10_E1S	120 V	0.11 A	330 mA	13.2 W
	277 V	0.05 A		


Lutron electrical tables

Light engine	Input volts	Input current	Drive current	Input power
C3L05_LU	120 V	0.06 A	150 mA	6.2 W
	277 V	0.02 A		
C3L07_LU	120 V	0.08 A	220 mA	8.8 W
	277 V	0.03 A		
C3L10_LU	120 V	0.12 A	330 mA	13.0 W
	277 V	0.05 A		
C3L15_LU	120 V	0.15 A	450 mA	17.7 W
	277 V	0.06 A		
C3L18_LU	120 V	0.17 A	500 mA	19.8 W
	277 V	0.07 A		


C3SWW Calculite 3"

Square wall wash


New construction (N)

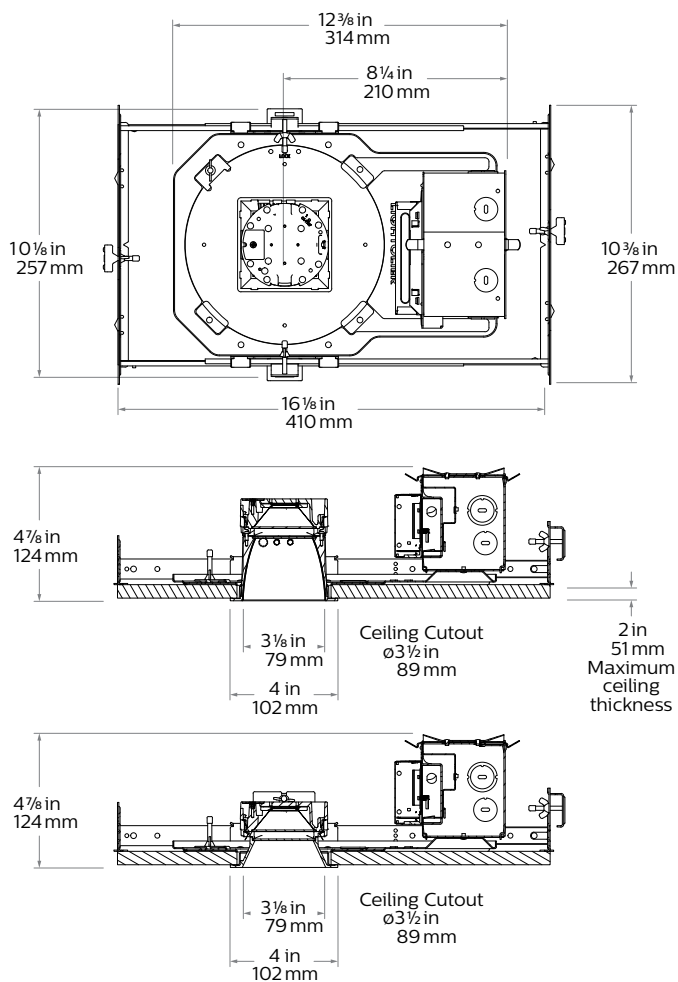


Standard IC (A) and Chicago plenum (LC)

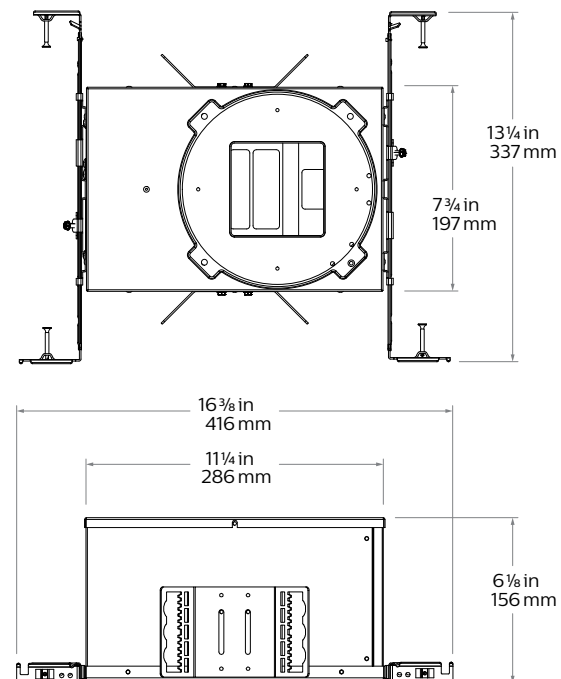



Shallow IC (S)

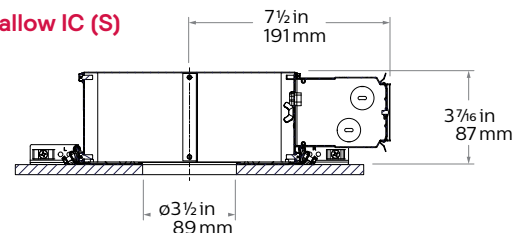

Remodeler (R)

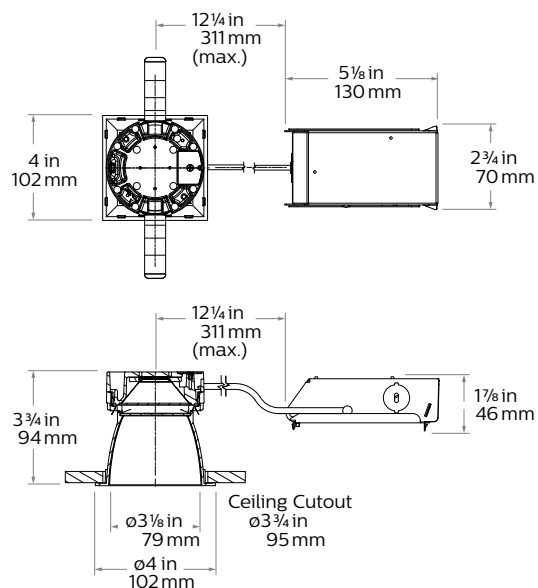

Flangeless mud-in ring

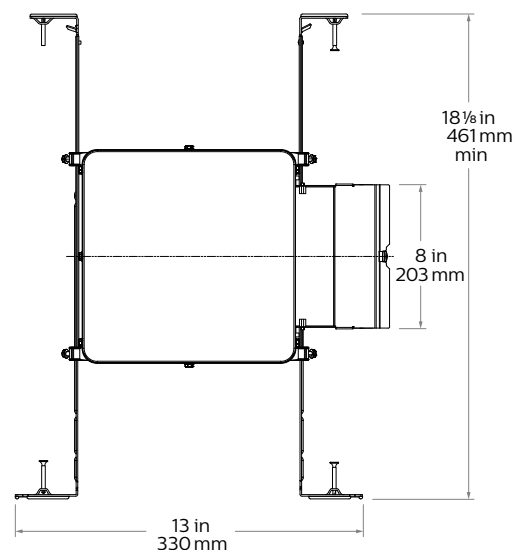

C3SWW Calculite 3"


Square wall wash

Adjustment factors

Finish	CCT	Lumens
WT = 110%	90CRI 4000K = 104%	1500lm = 130%
WH = 109%	90CRI 3500K = 100%	1000lm = 100%
CL = 109%	90CRI 3000K = 96%	750lm = 70%
CD = 109%	90CRI 2700K = 90%	500lm = 50%
BZ = 91%		
CC = 100%		
D = 100%		
BZ = 91%		
BT = 89%		
BK = 89%		

Wall wash, 1000lm engine, 56.0 lm/W

Candela Curve

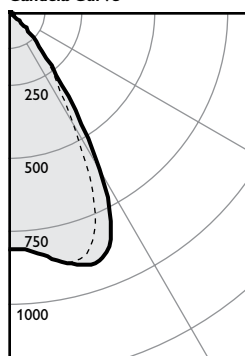

Frame: **3SN**
 Engine: **C3L10935SZ10U**
 Trim: **C3SLWCC**

Output lumens: 664 lms
 Input watts: 13.6 W
 CRI: 90 min
 CCT: 3500K

Efficacy: **48.8 lm/w**
 Report#: 1783GFR

Multiple unit data

Footcandles on wall

		2' from wall		
		3' on ctr.		
Distance from ceiling in feet				
1	19	16	19	
2	26	24	26	
3	23	21	23	
4	17	16	17	
5	11	12	11	
6	8	8	8	
7	6	6	6	
8	4	4	4	
9	3	3	3	
10	3	3	3	
12	2	2	2	
14	2	2	2	

Multiple unit data

Footcandles on wall

		2' from wall		
		4' on ctr.		
Distance from ceiling in feet				
1	16	10	16	
2	22	15	22	
3	19	14	19	
4	14	12	14	
5	9	9	9	
6	6	7	6	
7	5	5	5	
8	4	4	4	
9	3	3	3	
10	2	2	2	
12	2	2	2	
14	2	2	2	

Multiple unit data

Footcandles on wall

		2' from wall		
		5' on ctr.		
Distance from ceiling in feet				
1	16	6	16	
2	21	10	21	
3	18	10	18	
4	13	8	13	
5	8	7	8	
6	6	5	6	
7	4	4	4	
8	3	3	3	
9	2	3	2	
10	2	2	2	
12	2	2	2	
14	1	1	1	

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

