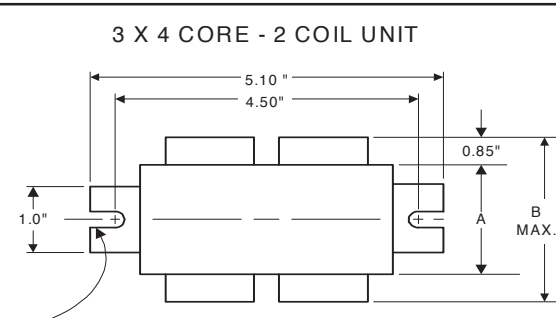
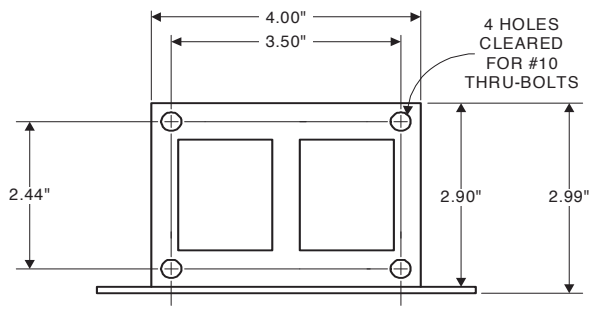

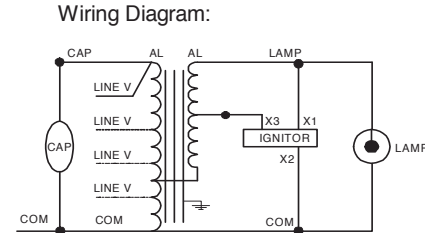



Electrical Specifications at 120-208-240-277V

DIMENSIONS AND DATA		120	208	240	277				
 <p>3 X 4 CORE - 2 COIL UNIT</p> <p>5.10" 4.50" 0.85" 1.0" A B MAX.</p>	INPUT VOLTS CIRCUIT TYPE HX-HPF POWER FACTOR (min) 90% REGULATION Line Volts ±5% Lamp Watts ±12% LINE CURRENT (Amps) Operating..... 1.60 0.96 0.80 0.70 Open Circuit..... 3.50 2.04 1.73 1.52 Starting..... 1.75 1.30 0.85 0.77 UL TEMPERATURE RATINGS Insulation Class H(180°C) Coil Temperature Code 1029 MIN. AMBIENT STARTING TEMP. -20°F or -30°C NOM. OPEN CIRCUIT VOLTAGE 250 INPUT VOLTAGE AT LAMP DROPOUT..... 90 156 180 208 INPUT WATTS 185 RECOMMENDED FUSE (Amps)..... 10 5 5 4 CORE and COIL Dimension (A) 2.25 Dimension (B) 3.90 Weight (lbs.) 6.32 Lead Lengths 12" CAPACITOR REQUIREMENT Microfarads 16.0 Volts (min.) 280 Fault Current Withstand (amps) 60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270) High Potential Test (Volts) 1 minute 2000 2 seconds 2500 Open Circuit Voltage Test (Volts) 235-290 Short-Circuit Current Test (Amps) Secondary Current 2.05-2.55 Input Current..... 1.03-1.41 0.61-0.92 0.49-0.74 0.44-0.67 -								
	 <p>4.00" 3.50" 4 HOLES CLEARED FOR #10 THRU-BOLTS 2.44" 2.90" 2.99"</p>	CAPACITOR: 7C160M30RA  <p>Capacitance: 16 Dia/Oval Dim: 1.65 Height: 2.75 Temp Rating: 105°C</p>	Wiring Diagram:  <p>Fig. K4</p>						
Ignitor: LI533-H4  <p>Red (X1) White (X2) Blue (X3)</p>	Ordering Information <table border="1"> <thead> <tr> <th>Order Suffix</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> </tbody> </table>					Order Suffix	Description		
Order Suffix	Description								
Ballast to Lamp Distance (BTL) = 10 feet Temp Rating: 105°C Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.									

Metal Halide 71A5492

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2019 Signify Holding. All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. All trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporation
200 Franklin Square Drive,
Somerset, NJ 08873
Telephone 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008