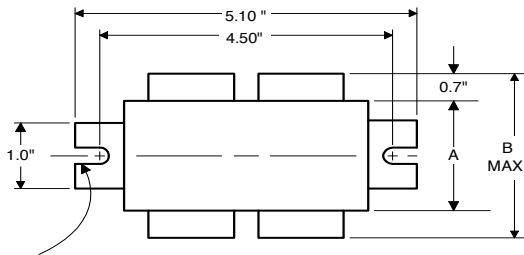
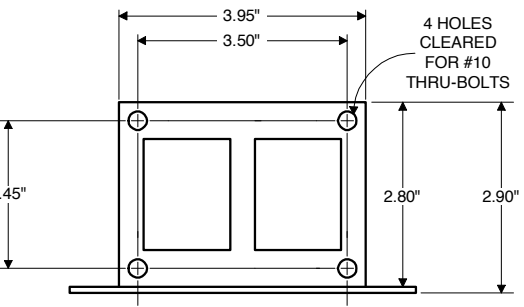

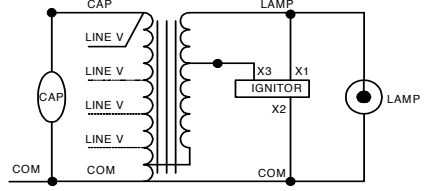



Electrical Specifications at 480V

DIMENSIONS AND DATA																																																																																																																																																																																																																			
<p>3 X 4 CORE - 2 COIL UNIT</p>  <p>0.25" WIDE 2 SLOTS</p> 	<table border="1"> <tr> <td>INPUT VOLTS</td> <td>480</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CIRCUIT TYPE</td> <td>HX-HPF</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>POWER FACTOR (min)</td> <td>90%</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>REGULATION</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Line Volts</td> <td>±5%</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Lamp Watts</td> <td>WITHIN TRAPEZOID</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>LINE CURRENT (Amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Operating.....</td> <td>0.42</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Open Circuit.....</td> <td>0.70</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Starting.....</td> <td>0.50</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>UL TEMPERATURE RATINGS</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Insulation Class</td> <td>H(180°C)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Coil Temperature Code</td> <td>1029</td> <td>E</td> <td></td> <td></td> <td></td> </tr> <tr> <td>MIN. AMBIENT STARTING TEMP.</td> <td>-40°F or -40°C</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>NOM. OPEN CIRCUIT VOLTAGE</td> <td>120</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>INPUT VOLTAGE AT LAMP DROPOUT.....</td> <td>384</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>INPUT WATTS</td> <td>188</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RECOMMENDED FUSE (Amps).....</td> <td>2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CORE and COIL</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Dimension (A)</td> <td>3.00</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Dimension (B)</td> <td>4.30</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Weight (lbs.)</td> <td>9</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Lead Lengths</td> <td>12"</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CAPACITOR REQUIREMENT</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Microfarads</td> <td>14.0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Volts (min.)</td> <td>280</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Fault Current Withstand (amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>High Potential Test (Volts)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> 1 minute</td> <td>2000</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> 2 seconds</td> <td>2500</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Open Circuit Voltage Test (Volts)</td> <td>110-130</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Short-Circuit Current Test (Amps)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Secondary Current</td> <td>3.95-4.85</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td> Input Current.....</td> <td>0.30-0.45</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	INPUT VOLTS	480					CIRCUIT TYPE	HX-HPF					POWER FACTOR (min)	90%					REGULATION						Line Volts	±5%					Lamp Watts	WITHIN TRAPEZOID					LINE CURRENT (Amps)						Operating.....	0.42					Open Circuit.....	0.70					Starting.....	0.50					UL TEMPERATURE RATINGS						Insulation Class	H(180°C)					Coil Temperature Code	1029	E				MIN. AMBIENT STARTING TEMP.	-40°F or -40°C					NOM. OPEN CIRCUIT VOLTAGE	120					INPUT VOLTAGE AT LAMP DROPOUT.....	384					INPUT WATTS	188					RECOMMENDED FUSE (Amps).....	2					CORE and COIL						Dimension (A)	3.00					Dimension (B)	4.30					Weight (lbs.)	9					Lead Lengths	12"					CAPACITOR REQUIREMENT						Microfarads	14.0					Volts (min.)	280					Fault Current Withstand (amps)						60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)						High Potential Test (Volts)						1 minute	2000					2 seconds	2500					Open Circuit Voltage Test (Volts)	110-130					Short-Circuit Current Test (Amps)						Secondary Current	3.95-4.85					Input Current.....	0.30-0.45				
INPUT VOLTS	480																																																																																																																																																																																																																		
CIRCUIT TYPE	HX-HPF																																																																																																																																																																																																																		
POWER FACTOR (min)	90%																																																																																																																																																																																																																		
REGULATION																																																																																																																																																																																																																			
Line Volts	±5%																																																																																																																																																																																																																		
Lamp Watts	WITHIN TRAPEZOID																																																																																																																																																																																																																		
LINE CURRENT (Amps)																																																																																																																																																																																																																			
Operating.....	0.42																																																																																																																																																																																																																		
Open Circuit.....	0.70																																																																																																																																																																																																																		
Starting.....	0.50																																																																																																																																																																																																																		
UL TEMPERATURE RATINGS																																																																																																																																																																																																																			
Insulation Class	H(180°C)																																																																																																																																																																																																																		
Coil Temperature Code	1029	E																																																																																																																																																																																																																	
MIN. AMBIENT STARTING TEMP.	-40°F or -40°C																																																																																																																																																																																																																		
NOM. OPEN CIRCUIT VOLTAGE	120																																																																																																																																																																																																																		
INPUT VOLTAGE AT LAMP DROPOUT.....	384																																																																																																																																																																																																																		
INPUT WATTS	188																																																																																																																																																																																																																		
RECOMMENDED FUSE (Amps).....	2																																																																																																																																																																																																																		
CORE and COIL																																																																																																																																																																																																																			
Dimension (A)	3.00																																																																																																																																																																																																																		
Dimension (B)	4.30																																																																																																																																																																																																																		
Weight (lbs.)	9																																																																																																																																																																																																																		
Lead Lengths	12"																																																																																																																																																																																																																		
CAPACITOR REQUIREMENT																																																																																																																																																																																																																			
Microfarads	14.0																																																																																																																																																																																																																		
Volts (min.)	280																																																																																																																																																																																																																		
Fault Current Withstand (amps)																																																																																																																																																																																																																			
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)																																																																																																																																																																																																																			
High Potential Test (Volts)																																																																																																																																																																																																																			
1 minute	2000																																																																																																																																																																																																																		
2 seconds	2500																																																																																																																																																																																																																		
Open Circuit Voltage Test (Volts)	110-130																																																																																																																																																																																																																		
Short-Circuit Current Test (Amps)																																																																																																																																																																																																																			
Secondary Current	3.95-4.85																																																																																																																																																																																																																		
Input Current.....	0.30-0.45																																																																																																																																																																																																																		
<p>Capacitor: 7C140M30RA</p>  <p>Capacitance: 14 Dia/Oval Dim: 1.65 Height: 2.75 Temp Rating: 105°C</p>	<p>Wiring Diagram:</p>  <p>Fig. K</p>																																																																																																																																																																																																																		
<p>Ignitor: LI551-H4</p>  <p>Ballast to Lamp Distance (BTL) = 2 feet Temp Rating: 105°C</p>	<p>Ordering Information</p> <table border="1"> <thead> <tr> <th>Order Suffix</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> </tbody> </table>	Order Suffix	Description																																																																																																																																																																																																																
Order Suffix	Description																																																																																																																																																																																																																		
<p>Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.</p>																																																																																																																																																																																																																			

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

