

PHILIPS

Recessed

EvoKit LED Retrofit Kit Gen 4



Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Philips EvoKit LED retrofit kit gen 4 is an energy efficient LED alternative to traditional linear fluorescent troffers. Not only does it offer energy savings¹, it also helps reduce maintenance costs due to its long lifetime. Simple construction helps decrease the installation time meaning you can have an LED solution in your ceiling in just minutes. Additional information can be found at www.philips.com/evokit. Products can be found on the DLC QPL by searching the 6 digit product number.

Ordering guide

Product Number	12NC	Description	Watts ³	Volts	Lumen Maintenance (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Diffusor
Dimming: 0-10V									
515692	929000781813	EvoKit 2x2 P 23L 17W 835 2 0-10 7 G4	17	120-277	70,000	2300	3500	134	Ribbed
515759	929000782213	EvoKit 2x2 P 23L 17W 840 2 0-10 7 G4	17	120-277	70,000	2300	4000	137	Ribbed
◆ 516005	929000783313	EvoKit 2x2 P 32L 24W 835 2 0-10 7 G4	24	120-277	70,000	3200	3500	132	Ribbed
◆ 515940	929000782713	EvoKit 2x2 P 32L 24W 840 2 0-10 7 G4	24	120-277	70,000	3200	4000	135	Ribbed
516237	929000785513	EvoKit 2x4 P 30L 22W 835 2 0-10 7 G4	22	120-277	70,000	3000	3500	135	Ribbed
516039	929000783613	EvoKit 2x4 P 30L 22W 840 2 0-10 7 G4	22	120-277	70,000	3000	4000	137	Ribbed
◆ 516286	929000786013	EvoKit 2x4 P 36L 27W 835 2 0-10 7 G4	27	120-277	70,000	3600	3500	135	Ribbed
◆ 516328	929000786413	EvoKit 2x4 P 36L 26W 840 2 0-10 7 G4	26	120-277	70,000	3600	4000	137	Ribbed
◆ 516427	929000787413	EvoKit 2x4 P 42L 32W 835 2 0-10 7 G4	32	120-277	70,000	4200	3500	134	Ribbed
◆ 516369	929000786813	EvoKit 2x4 P 42L 31W 840 2 0-10 7 G4	31	120-277	70,000	4200	4000	136	Ribbed
516534	929000788513	EvoKit 2x4 P 47L 36W 835 2 0-10 7 G4	36	120-277	70,000	4700	3500	132	Ribbed
516476	929000787913	EvoKit 2x4 P 47L 35W 840 2 0-10 7 G4	35	120-277	70,000	4700	4000	135	Ribbed
515643	929000781613	EvoKit 2x2 P 23L 17W 850 2 0-10 7 G4	17	120-277	70,000	2300	5000	138	Ribbed
515981	929000783113	EvoKit 2x2 P 32L 24W 850 2 0-10 7 G4	24	120-277	70,000	3200	5000	135	Ribbed
516260	929000785813	EvoKit 2x4 P 36L 26W 850 2 0-10 7 G4	26	120-277	70,000	3600	5000	139	Ribbed
516401	929000787213	EvoKit 2x4 P 42L 31W 850 2 0-10 7 G4	31	120-277	70,000	4200	5000	138	Ribbed
516518	929000788313	EvoKit 2x4 P 47L 34W 850 2 0-10 7 G4	34	120-277	70,000	4700	5000	136	Ribbed

See footnotes on the last page.




interact
ready.

EvoKit LED retrofit kit gen 4

EvoKit Sensor Ready (SR) with Philips Advance Xitanium SR for connected lighting solutions

EvoKit SR is a new platform that allows users to choose different control platforms to suit their needs and budget; from simple occupancy and daylight sensing to cloud-connected data-reporting sensing. This empowers users to fine-tune their energy use for reduced energy costs. Various Interact, Philips SpaceWise, and other SR certified controls are available. Please refer to [Philips.com/evokit](https://www.philips.com/evokit) for details. Contact your Philips representative for a current list of additional approved sensors. Sensors are connected in the field with just a few simple steps:



Step 1: EvoKit SR is shipped with a plate covering the sensor hole. There are two wires secured to the back of the plate.



Step 2: The plate can be removed before or after you install EvoKit SR. Just gently slide the plate to one end and remove.



Step 3: Remove the two wires that were secured to the back of the plate.



Step 4: Take these two wires and insert them into the sensor. They are not polarity sensitive.



Step 5: Insert the sensor back into the hole. The sensor may or may not require a socket.

Product Number	12NC	Description	Watts ³	Volts	Lumen Maintenance (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Diffusor
Dimming: SR									
521047	929001753813	EvoKit 2x2 P 26L 20W 835 2 SR 7 G4	20	120-277	70,000	2600	3500	130	Ribbed
521054	929001753913	EvoKit 2x2 P 26L 20W 840 2 SR 7 G4	20	120-277	70,000	2600	4000	132	Ribbed
521062	929001754013	EvoKit 2x2 P 26L 20W 850 2 SR 7 G4	20	120-277	70,000	2600	5000	134	Ribbed
516013	929000783413	EvoKit 2x2 P 32L 25W 835 2 SR 7 G4	25	120-277	70,000	3200	3500	129	Ribbed
◆ 515957	929000782813	EvoKit 2x2 P 32L 24W 840 2 SR 7 G4	24	120-277	70,000	3200	4000	132	Ribbed
521070	929001754113	EvoKit 2x2 P 32L 24W 850 2 SR 7 G4	24	120-277	70,000	3200	5000	136	Ribbed
516245	929000785613	EvoKit 2x4 P 30L 23W 835 2 SR 7 G4	23	120-277	70,000	3000	3500	131	Ribbed
516203	929000785213	EvoKit 2x4 P 30L 23W 840 2 SR 7 G4	23	120-277	70,000	3000	4000	133	Ribbed
516435	929000787513	EvoKit 2x4 P 42L 32W 835 2 SR 7 G4	32	120-277	70,000	4200	3500	132	Ribbed
◆ 516377	929000786913	EvoKit 2x4 P 42L 32W 840 2 SR 7 G4	32	120-277	70,000	4200	4000	134	Ribbed
521088	929001754213	EvoKit 2x4 P 42L 29W 835 2 SR 7 G4	29	120-277	70,000	4200	3500	137	Ribbed
521096	929001754313	EvoKit 2x4 P 42L 29W 840 2 SR 7 G4	29	120-277	70,000	4200	4000	140	Ribbed
521104	929001754413	EvoKit 2x4 P 42L 29W 850 2 SR 7 G4	29	120-277	70,000	4200	5000	142	Ribbed
516542	929000788613	EvoKit 2x4 P 47L 36W 835 2 SR 7 G4	36	120-277	70,000	4700	3500	130	Ribbed
516484	929000788013	EvoKit 2x4 P 47L 36W 840 2 SR 7 G4	36	120-277	70,000	4700	4000	132	Ribbed

Commercial Product Name	Order Code
EVO441 wireless transceiver for Evokit	541367

The Philips EVO441 fixture-mount transceiver enables InterAct Pro connectivity in a single, compact package for easy field assembly. EVO441 operates with the established Xitanium SR driver standard to make a simple two-wire connection between transceiver and driver. It can be easily attached to any EvoKit SR (sensor ready), thus eliminating the need for multiple components and auxiliary devices. The result is an InterAct Ready EvoKit.



Commercial Product Name	Order Code
EasySense EVO102	514877
EasySense EVO200	516575

The Philips EasySense fixture-mount sensor is the ideal solution for per-fixture control of new light fixtures. It combines occupancy sensing, daylight harvesting and task tuning in a single, compact package.



Attention Interact Pro users: Please familiarize yourself with the Interact pro system before beginning your project installation. It is important that the gateway is powered before the Interact ready EvoKits are installed. Design guides and tutorials are available at: <https://www.interact-lighting.com/en-us/what-is-possible/interact-pro>.

See footnotes on the last page.

EvoKit LED retrofit kit gen 4

EvoKit with SpaceWise DT technology

Product Number	12NC	Description	Watts ³	Volts	Lumen Maint (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Diffusor
◆ 518332	929001709313	EvoKit 2x2 P 32L 25W 835 2 SWZDT 7 G4	25	120-277	70,000	3200	3500	129	Ribbed
◆ 518324	929001709213	EvoKit 2x2 P 32L 24W 840 2 SWZDT 7 G4	24	120-277	70,000	3200	4000	132	Ribbed
518407	929001710013	EvoKit 2x4 P 30L 23W 835 2 SWZDT 7 G4	23	120-277	70,000	3000	3500	131	Ribbed
518415	929001710113	EvoKit 2x4 P 30L 23W 840 2 SWZDT 7 G4	23	120-277	70,000	3000	4000	133	Ribbed
◆ 518423	929001710213	EvoKit 2x4 P 42L 32W 835 2 SWZDT 7 G4	32	120-277	70,000	4200	3500	132	Ribbed
◆ 518431	929001710313	EvoKit 2x4 P 42L 32W 840 2 SWZDT 7 G4	32	120-277	70,000	4200	4000	134	Ribbed
518449	929001710413	EvoKit 2x4 P 47L 36W 835 2 SWZDT 7 G4	36	120-277	70,000	4700	3500	130	Ribbed
518456	929001710513	EvoKit 2x4 P 47L 36W 840 2 SWZDT 7 G4	36	120-277	70,000	4700	4000	132	Ribbed
523746	929001778913	EvoKit 2x2 P 32L 26W 935 2 SWZDT 7 G4	26	120-277	70,000	3200	3500	128	Ribbed
523753	929001779013	EvoKit 2x4 P 30L 23W 935 2 SWZDT 7 G4	23	120-277	70,000	3000	3500	130	Ribbed
523761	929001779113	EvoKit 2x4 P 42L 33W 935 2 SWZDT 7 G4	33	120-277	70,000	4200	3500	126	Ribbed
523779	929001779213	EvoKit 2x4 P 47L 37W 935 2 SWZDT 7 G4	37	120-277	70,000	4700	3500	125	Ribbed

See footnotes on page 9. Please refer to www.usa.lighting.philips.com/systems/lighting-systems/spacewise for more detailed specification sheets as well as a full list of compatible wireless dimming switches.

Features

- Occupancy sensing, daylight harvesting and task tuning in one device
- Granular dimming (occupancy sharing)
- Dwell time
- Scene setting
- Configuration of sensor parameters – if desired – using NFC or IR via intuitive Android-based Philips field apps
- Quick task tuning in the field to optimize light and power levels
- Enables auto-off/manual-on and auto-off/partial-on application
- DLC qualified: Listed on the QPL for Networked Lighting Controls

Benefits

- Installation savings – integral wireless controls factory installed. No need to order separate components.
- Minimal startup and configuration expertise – savings on labor time & effort
- Deep energy savings & code compliance strategies
- Faster ROI with attractive payback periods (varies depending on luminaire choices)


Applications

Conference rooms, individual offices, open offices, classrooms, storage and break areas, restrooms, lobbies

SpaceWise wireless switch


To complete the SpaceWise System a wireless switch may be added.

Ordering code: UID8451/10

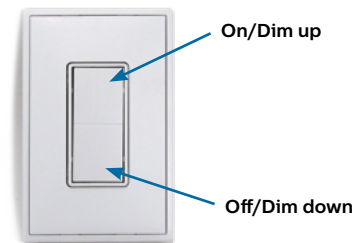

New configuration tool

An Android phone is needed for commissioning the system. Please refer to www.usa.lighting.philips.com/systems/lighting-systems/spacewise for full list of compatible phones.

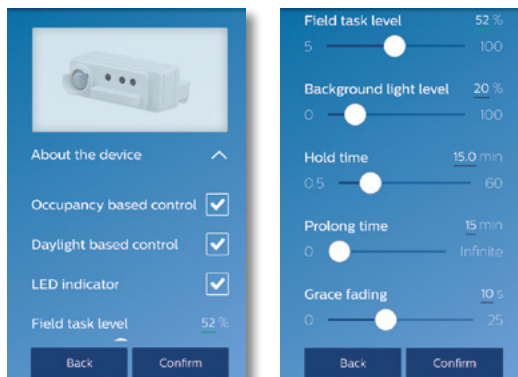

Sensor parameters can be configured via Philips field apps. Two versions are available:

1. NFC – This app allows configuring sensor parameters only when you can physically access the sensor with a smartphone.
2. IR – This app allows configuring sensor parameters plus enables grouping to a wireless switch, which can be done with the IR feature of applicable phones from floor level.

You must first register for the app to receive a username and password, then download Philips field apps from the Google Play Store.



EvoKit LED retrofit kit gen 4

EvoKit with air return

The air return versions of EvoKit are suitable for retrofitting listed air return troffers.

Product Number	12NC	Description	Watts ³	Volts	Lumen Maintenance (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Diffusor
EvoKit with Air Return									
515494	929000781013	EvoKit 2x2 A 23L 17W 835 2 0-10 7 G4	17	120-277	70,000	2300	3500	134	Ribbed
515544	929000781113	EvoKit 2x2 A 23L 17W 840 2 0-10 7 G4	17	120-277	70,000	2300	4000	136	Ribbed
515551	929000781213	EvoKit 2x2 A 32L 24W 835 2 0-10 7 G4	24	120-277	70,000	3200	3500	135	Ribbed
515569	929000781313	EvoKit 2x2 A 32L 24W 840 2 0-10 7 G4	24	120-277	70,000	3200	4000	135	Ribbed
516054	929000783813	EvoKit 2x4 A 30L 22W 835 2 0-10 7 G4	22	120-277	70,000	3000	3500	135	Ribbed
516195	929000785113	EvoKit 2x4 A 30L 22W 840 2 0-10 7 G4	22	120-277	70,000	3000	4000	138	Ribbed
516088	929000784013	EvoKit 2x4 A 36L 27W 835 2 0-10 7 G4	27	120-277	70,000	3600	3500	135	Ribbed
516096	929000784113	EvoKit 2x4 A 36L 26W 840 2 0-10 7 G4	26	120-277	70,000	3600	4000	137	Ribbed
516120	929000784413	EvoKit 2x4 A 42L 31W 835 2 0-10 7 G4	31	120-277	70,000	4200	3500	134	Ribbed
516104	929000784213	EvoKit 2x4 A 42L 31W 840 2 0-10 7 G4	31	120-277	70,000	4200	4000	136	Ribbed
516161	929000784813	EvoKit 2x4 A 47L 36W 835 2 0-10 7 G4	36	120-277	70,000	4700	3500	132	Ribbed
516146	929000784613	EvoKit 2x4 A 47L 35W 840 2 0-10 7 G4	35	120-277	70,000	4700	4000	135	Ribbed
SpaceWise DT Air Return									
518316	929001709113	EvoKit 2x2 A 32L 25W 835 2 SWZDT 7 G4	25	120-277	70,000	3200	3500	130	Ribbed
518308	929001709013	EvoKit 2x2 A 32L 24W 840 2 SWZDT 7 G4	24	120-277	70,000	3200	4000	133	Ribbed
518357	929001709513	EvoKit 2x4 A 30L 23W 835 2 SWZDT 7 G4	23	120-277	70,000	3000	3500	132	Ribbed
518340	929001709413	EvoKit 2x4 A 30L 22W 840 2 SWZDT 7 G4	22	120-277	70,000	3000	4000	136	Ribbed
518373	929001709713	EvoKit 2x4 A 42L 32W 835 2 SWZDT 7 G4	32	120-277	70,000	4200	3500	132	Ribbed
518365	929001709613	EvoKit 2x4 A 42L 31W 840 2 SWZDT 7 G4	31	120-277	70,000	4200	4000	135	Ribbed
518399	929001709913	EvoKit 2x4 A 47L 36W 835 2 SWZDT 7 G4	36	120-277	70,000	4700	3500	131	Ribbed
518381	929001709813	EvoKit 2x4 A 47L 35W 840 2 SWZDT 7 G4	35	120-277	70,000	4700	4000	134	Ribbed
523787	929001779313	EvoKit 2x2 A 32L 26W 935 2 SWZDT 7 G4	26	120-277	70,000	3200	3500	128	Ribbed
523795	929001779413	EvoKit 2x4 A 30L 23W 935 2 SWZDT 7 G4	23	120-277	70,000	3000	3500	130	Ribbed
523803	929001779513	EvoKit 2x4 A 42L 33W 935 2 SWZDT 7 G4	33	120-277	70,000	4200	3500	126	Ribbed
523811	929001779613	EvoKit 2x4 A 47L 37W 935 2 SWZDT 7 G4	37	120-277	70,000	4700	3500	125	Ribbed

See footnotes on page 9. Please refer to www.usa.lighting.philips.com/systems/lighting-systems/spacewise for more detailed specification sheets as well as a full list of compatible wireless dimming switches.

2x2 air return data


Return Air Volume, SCFM.	61	69	80	97	112	131
Negative Static Pressure, in. H ₂ O	0.11	0.15	0.20	0.30	0.40	0.55
**Noise Criteria (NC)	17	21	25	31	34	38

Note: 24 total air slots, each 30mm x 6mm.

2x4 air return data

Return Air Volume, SCFM.	105	119	128	162	259	272
Negative Static Pressure, in. H ₂ O	0.05	0.08	0.10	0.20	0.45	0.55
**Noise Criteria (NC)	<15	32	32	36	38	40

Note: 50 total air slots, each 30mm x 6mm.

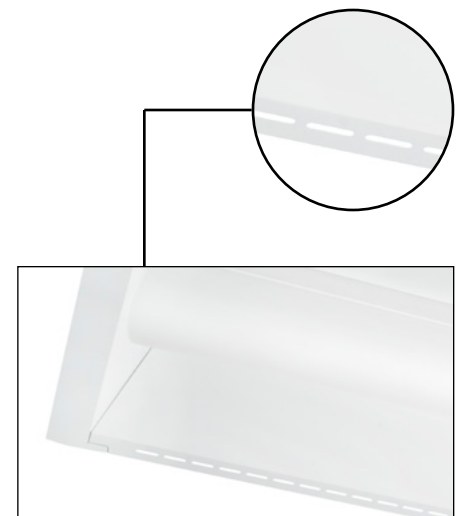

See footnotes on the last page.

EvoKit LED retrofit kit gen 4

Application

- A highly efficient, visually comfortable, architecturally styled LED retrofit kit designed to replace recessed linear fluorescent troffers.
- Unique modular design offers refreshing new look in the ceiling when compared to traditional fluorescent luminaires.
- Single light bar combined with slanted troffer helps reflect light to reduce glare and provide uniform light distribution making it ideal for applications such as offices, schools, healthcare and retail.
- Excellent color rendering with a CRI above 80.
- Extremely high efficacies up to 138 lumens per watt.
- LEDs are an excellent source for use with controls since dimming or frequent switching does not degrade the performance or life of the source.
- Designed for use with standard grid (NEMA "G") or Narrow Grid (NEMA "NFG") ceiling T-Grids.
- High efficiency source and luminaire design help significantly reduce energy consumption and more easily comply with known energy codes.
- Helps meet regulation requirements such as ASHRAE 90.1 and Title 24 when matched with suitable controls.

Construction/Finish

- Simple design allows for quick installation in existing luminaire without the need to break the ceiling plenum.

- Constructed using galvanized steel which helps fight rust and makes for more durable product.
- Integrated securement tabs for securement to existing troffer housing.
- Minimum depth of only 3" necessary to allow proper clearance and installation of the EvoKit.
- Retrofit kit is powder coated after fabrication with high quality, durable finish to ensure no unfinished edges and avoid future potential of corrosion.
- Components fit together easily without the need for tools during installation.

Electrical

- Multiple driver options available
 - Philips Advance Xitanium SR driver allows flexibility to integrate a range of control options.
 - 0-10V dimming satisfies universal voltage requirements
- 5-year limited warranty includes all components of the retrofit kit, including driver, LED board and nonelectrical components."
- Listed with UL and Design Lights Consortium[†] to ensure quality performance and safety standards are met.
- High efficiency LEDs have a minimum 70,000 hour rated life (L_{70}).

Enclosure

- Diffuser requires no frames or fasteners and can be easily removed from below without tools if needed.

Accessories

- Suitable for use with Philips 503441 emergency backup.
- Suitable for use with a wide range of control systems.
- Earthquake cables available for additional securement to the existing troffer for areas where required.

Prod. No.	Description
502435	Earthquake cable 317mm
517987	EvoKit 2x4 replacement lens ribbed
517748	EvoKit 2x4 replacement lens smooth
517979	EvoKit 2x2 replacement lens ribbed
517755	EvoKit 2x2 replacement lens smooth
503441	EvoKit field installed emergency battery backup (requires the use of bracket)
517730	EvoKit emergency battery backup bracket (brackets come in packs of 4). Two emergency brackets needed per battery pack.

EvoKit with new SimpleSet technology for wireless lumen level programming

EvoKit with new SimpleSet technology allows the maximum lumen level to be set prior to installation using a smartphone-based app without requiring power to the luminaire. Available in the 0-10V and SR versions only. The app can be downloaded at Google Play. Please contact your Philips representative for the current list of approved Android smartphones. Distributors can set lumen levels prior to shipping, and contractors can set lumen levels prior to installation. Lumen level is quickly and easily set in two steps:



Step 1: Place the smartphone next to the NFC antenna on the driver.


Step 2: Follow the on-screen instructions.



EvoKit LED retrofit kit gen 4


Dimensions 2x4

A Face Plate Length	B Face Plate Width	C Height
47.83"	23.9"	2.95"

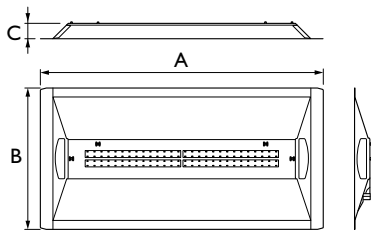

Dimensions 2x2

A Face Plate Length	B Face Plate Width	C Height
23.9"	23.9"	2.95"



2'x2' EvoKit, P 23L 17W 835 2 0-10 7 G4, 2,202 delivered lumens

Catalog No.	515692
Test No.	x223L
S/MH	1.2
Lamp Type	LED
Lumens/Watt	131
Input Watts	17

Comparative yearly lighting energy cost per 1000 lumens - \$1.83 based on 3000 hours and \$0.08/kWh

The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology

Photometric values based on tests performed in compliance with LM-79

Candlepower Angle	End	Cross	Back-45
0	800	800	0
5	799	796	0
10	785	784	0
15	763	765	0
20	733	738	0
25	695	704	0
30	650	663	0
35	600	617	0
40	545	569	0
45	486	519	0
50	427	468	0
55	365	418	0
60	304	367	0
65	243	313	0
70	182	255	0
75	124	192	0
80	71	126	0
85	26	60	0

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80			70			50		
pw	70	50	30	70	50	30	50	30	
RCR									
0	118	118	118	115	115	115	111	111	
1	108	104	98	106	101	96	96	93	
2	97	90	82	95	88	81	84	79	
3	90	79	70	86	77	69	73	68	
4	81	69	60	80	68	59	66	58	
5	76	63	53	72	60	53	58	52	
6	69	56	46	68	55	46	54	46	
7	65	51	41	63	50	41	48	40	
8	59	46	38	58	46	38	45	36	
9	56	42	34	55	41	34	40	34	
10	53	40	32	52	39	30	38	30	

Light Distribution

Degrees	Lumens	% Luminaire	Average Luminance			
Angle	End	45°	Cross			
0-30	609	27.7				
0-40	984	44.7				
0-60	1709	77.6				
0-90	2202	100				
			45	5897	6110	6297
			55	5463	5913	6259
			65	4936	5867	6356
			75	4122	5880	6369
			85	2597	5689	5953

2'x2' EvoKit, P 32L 24W 835 2 0-10 7 G4, 3,062 delivered lumens

Catalog No.	516005
Test No.	x232L
S/MH	1.2
Lamp Type	LED
Lumens/Watt	129
Input Watts	24

Comparative yearly lighting energy cost per 1000 lumens - \$1.86 based on 3000 hours and \$0.08/kWh

The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology

Photometric values based on tests performed in compliance with LM-79

Candlepower Angle	End	Cross	Back-45
0	1112	1112	0
5	1109	1102	0
10	1090	1082	0
15	1060	1052	0
20	1018	1010	0
25	966	959	0
30	903	901	0
35	832	836	0
40	756	768	0
45	674	699	0
50	591	630	0
55	506	559	0
60	421	486	0
65	338	410	0
70	254	328	0
75	173	238	0
80	99	148	0
85	37	51	0

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80			70			50		
pw	70	50	30	70	50	30	50	30	
RCR									
0	118	118	118	115	115	115	111	111	
1	108	104	98	106	101	96	96	93	
2	97	90	82	95	88	81	84	79	
3	90	79	70	86	77	69	73	67	
4	81	69	60	80	68	59	66	58	
5	76	63	53	72	60	53	58	52	
6	69	56	46	68	55	46	54	46	
7	65	51	41	63	50	41	48	40	
8	59	46	38	58	46	38	45	36	
9	56	42	34	55	41	34	40	34	
10	53	40	32	52	39	30	38	30	

Light Distribution

Degrees	Lumens	% Luminaire	Average Luminance			
Angle	End	45°	Cross			
0-30	846	27.6				
0-40	1369	44.7				
0-60	2377	77.6				
0-90	3062	100				
			45	8183	8270	8488
			55	7572	7953	8358
			65	6858	7768	8336
			75	5744	7440	7901
			85	3651	5398	4985

EvoKit LED retrofit kit gen 4

2'x4' EvoKit, P 30L 22W 835 2 0-10 7 G4, 2,758 delivered lumens

Catalog No.	516237	Candlepower				Coefficients of Utilization											
Test No.	x430L	Angle	End	45	Cross	Back-45	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)										
S/MH	1.2	0	952	952	952	952	pcc	80			70			50			
Lamp Type	LED	5	937	948	962	946	pw	70	50	30	70	50	30	50	30		
Lumens/Watt	133	15	899	911	927	907	RCR										
Input Watts	21	25	824	838	855	832	0	118	118	118	115	115	115	111	111		
		35	585	613	642	604	1	108	103	97	105	101	96	95	93		
		45	445	488	531	480	2	97	89	81	94	86	81	83	78		
		55	648	700	762	686	3	89	78	69	86	76	68	72	67		
		65	299	369	413	362	4	81	68	59	79	68	58	65	57		
		75	156	239	263	232	5	75	61	52	72	59	52	57	51		
		85	35	79	78	67	6	68	55	46	67	54	46	53	45		
							7	64	50	40	61	48	40	47	40		
							8	59	46	36	57	45	36	44	35		
							9	56	41	34	54	40	34	40	33		
							10	52	39	30	51	38	30	36	29		

Light Distribution				Average Luminance			
Degrees	Lumens	% Luminaire		Angle	End	45°	Cross
0-30	731	26.5		45	4125	4319	4526
0-40	1189	43.1		55	3864	4239	4613
0-60	2092	75.9		65	3524	4350	4864
0-90	2758	100		75	3004	4607	5066
				85	2007	4500	4471


2'x4' EvoKit, P 36L 27W 835 2 0-10 7 G4, 3,368 delivered lumens

Catalog No.	516286	Candlepower				Coefficients of Utilization											
Test No.	x436L	Angle	End	45	Cross	Back-45	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)										
S/MH	1.3	0	1167	1167	1167	1167	pcc	80			70			50			
Lamp Type	LED	5	1149	1161	1180	1159	pw	70	50	30	70	50	30	50	30		
Lumens/Watt	132	15	1103	1117	1136	1111	RCR										
Input Watts	26	25	1012	1027	1048	1019	0	118	118	118	115	115	115	111	111		
		35	883	901	925	890	1	108	103	97	105	101	96	95	93		
		45	718	749	783	738	2	97	89	81	94	86	81	83	78		
		55	548	596	645	586	3	89	78	69	86	77	68	73	67		
		65	370	450	502	441	4	81	68	59	79	68	58	65	57		
		75	195	290	320	282	5	75	61	52	72	60	52	57	51		
		85	45	87	93	82	6	68	56	46	67	55	46	53	45		
							7	64	50	40	61	50	40	47	40		
							8	59	46	36	57	45	36	44	35		
							9	56	41	34	54	41	34	40	33		
							10	52	39	30	51	38	30	36	29		


Light Distribution				Average Luminance			
Degrees	Lumens	% Luminaire		Angle	End	45°	Cross
0-30	896	26.6		45	5063	5281	5517
0-40	1456	43.2		55	4758	5181	5606
0-60	2559	76.0		65	4363	5306	5915
0-90	3368	100		75	3758	5574	6159
				85	2550	4992	5340

EvoKit LED retrofit kit gen 4

2'x4' EvoKit, P 42L 32W 835 2 0-10 7 G4, 4,134 delivered lumens

		Candlepower					Coefficients of Utilization										
		Angle	End	45	Cross	Back-45	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)										
Catalog No.	516427		0	1435	1435	1435	pcc	80			70			50			
Test No.	x442L		5	1414	1428	1451	1424	pw	70	50	30	70	50	30	50	30	
S/MH	1.3		15	1359	1375	1396	1364	RCR									
Lamp Type	LED		25	1247	1264	1288	1249	0	118	118	118	115	115	115	111	111	
Lumens/Watt	131		35	1087	1109	1135	1089	1	108	103	97	105	101	96	95	93	
Input Watts	32		45	888	924	961	902	2	97	89	81	94	86	81	83	78	
Comparative yearly lighting energy cost per 1000 lumens - \$1.83 based on 3000 hours and \$0.08/kWh			55	676	734	791	714	3	89	78	69	86	77	68	73	67	
			65	457	552	614	535	4	81	68	59	79	68	58	65	57	
			75	242	358	392	341	5	75	61	53	72	60	52	57	51	
			85	56	122	117	104	6	68	56	46	67	55	46	53	45	
										7	64	50	40	61	50	40	47
The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology								8	59	46	36	57	45	36	44	35	
								9	56	41	34	54	41	34	40	33	
								10	52	39	30	51	38	30	36	29	
Photometric values based on tests performed in compliance with LM-79								Light Distribution			Average Luminance						
		Degrees			Lumens	% Luminaire	Angle			End	45°	Cross					
		0-30			1102	26.7	45			4688	4877	5077					
		0-40			1790	43.3	55			4403	4775	5147					
		0-60			3143	76.0	65			4033	4881	5427					
			0-90			4134	100	75			3484	5171	5655				
								85			2412	5244	5021				

2'x4' EvoKit, P 47L 36W 835 2 0-10 7 G4, 4,662 delivered lumens

Catalog No.	516534		Candlepower				Coefficients of Utilization										
Test No.	x447L		Angle	End	45	Cross	Back-45	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)									
S/MH	1.3		0	1616	1616	1616	1616	pcc	80			70			50		
Lamp Type	LED		5	1593	1609	1634	1604	pw	70	50	30	70	50	30	50	30	
Lumens/Watt	131		15	1534	1548	1574	1536	RCR									
Input Watts	36		25	1408	1425	1451	1408	0	118	118	118	115	115	115	111	111	
			35	1230	1250	1280	1227	1	108	103	97	105	101	96	95	93	
			45	1007	1041	1085	1016	2	97	89	81	94	86	81	83	78	
			55	767	827	893	805	3	89	78	69	86	77	68	73	67	
			65	519	624	693	603	4	81	68	59	79	68	58	65	57	
Comparative yearly lighting energy cost per 1000 lumens - \$1.83 based on 3000 hours and \$0.08/kWh		75	277	405	443	384	5	75	61	52	72	60	52	57	51		
		85	68	139	133	119	6	68	56	46	67	55	46	53	45		
							7	64	50	40	61	50	40	47	40		
							8	59	46	36	57	45	36	44	35		
							9	56	41	34	54	41	34	40	33		
							10	52	39	30	51	38	30	36	29		
The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology																	
Photometric values based on tests performed in compliance with LM-79																	
											</						

EvoKit LED retrofit kit gen 4

Energy saving solution – EvoKit 2'x4'

Estimated lighting costs using a standard 3 lamp T8 troffer

Present wattage	85	W
× Annual operating hours	4,380	hrs
	= 372,300	Watt-Hours
÷ 1,000	= 372.3	kWh per year
× kWh rate of \$0.10	= \$37.23	per year
× 125 fixtures	\$4,653.75	annual energy cost per space

Estimated lighting costs using a Philips 42L 2x4 Evokit G4

Present wattage	31	W
× Annual operating hours	4,380	hrs
	= 135,780	Watt-Hours
÷ 1,000	= 135.78	kWh per year
× kWh rate of \$0.10	= \$13.58	per year
× 125 fixtures	\$1,697.25	annual energy cost per space

Total estimated annual savings[‡] \$2,956.50

[‡] Based on 125 fixtures per space operating 4,380 hours a year. 125 fixtures is roughly equivalent to a 10,000 square foot space. kWh rates will vary.

FOOTNOTES:

1) Please refer to the energy saving chart above for details.

2) L₇₀ 72,000 hours @ 35°C based on TM21 and LM80.

3) Based on photometric testing consistent with IES LM-79. Actual wattage may differ by +/- 10%.

Actual initial lumen output may vary between -10 and +10% of the rated lumens.

♦ Made to stock product (Contact your Philips sales representative for stock availability and lead time).

*** Please visit www.philips.com/warranties for full details.

† Restrictions on Hazardous Substances (RoHS) is a European directive (2002/95/EC) designed to limit the content of 6 substances [lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE)] in electrical and electrical products. For products used in North America, compliance with RoHS is voluntary and self-certified.

‡ Evokit luminaires are Design Lights Consortium qualified. Please see the DLC QPL list for exact catalog numbers (<http://www.designlights.org/QPL>).

● These SKUs do not meet DLC Premium qualification criteria. Evokit luminaires are Design Lights Consortium qualified. Please see the DLC QPL list for exact catalog numbers (<http://www.designlights.org/QPL>).



© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporation
200 Franklin Square Drive,
Somerset, NJ 08873
Telephone 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008