



Philips CorePro LEDspotLV

CorePro LEDspot 12V

Las lámparas CorePro LEDspots resultan perfectas para la iluminación puntual y ofrecen una luz cálida de tipo halógeno. Son compatibles con la mayoría de las luminarias existentes con casquillo MR16 GU5.3 y están diseñadas para la sustitución de puntos halógenos o incandescentes. Las lámparas LED suponen un importante ahorro de energía y minimizan los costes de mantenimiento.

Beneficios

- Luz blanca suave
- Hasta un 80% de ahorro energético en comparación con las lámparas halógenas
- Bajo coste de mantenimiento
- Amplia compatibilidad con transformadores
- Baja emisión de calor

Características

- Sustitución sencilla
- Vida útil de 15.000 horas
- Luz libre de radiación UV e IR
- Sin mercurio ni otros materiales peligrosos
- Diseño de protector de lente mejorado
- Calidad Philips de confianza a un precio competitivo

Aplicaciones

- Hoteles, restaurantes, bares, cafeterías, museos, tiendas
- Vestíbulos, pasillos, escaleras, aseos, zonas de recepción, exposiciones, expositores

CorePro LEDspot 12V

Versions



CorePro LEDspot LV 35W GU5-3
827 36D ND



MASTER LEDspot LV 35W GU5-3
827 36D VLE





LEDspots Corepro SLR 2 MR16
GU5,3



LEDspot GU4 Classic MR11

Plano de dimensiones



Product	D	C
CorePro LED spot ND 2.9-20W MR16 827 36D	50,5 mm	45,5 mm
CorePro LED spot ND 4.4-35W MR16 827 36D	50,5 mm	45,5 mm
CorePro LED spot ND 4.4-35W MR16 840 36D	50,5 mm	45,5 mm
CorePro LED spot ND 7-50W MR16 827 36D	50,5 mm	45 mm
CorePro LED spot ND 7-50W MR16 830 36D	50,5 mm	45 mm
CorePro LED spot ND 7-50W MR16 840 36D	50,5 mm	45 mm

Product	D	C
CorePro LED spot 2.3-20W 827 MR11 36D	35,5 mm	39,5 mm

CorePro LEDspot 12V

Información general	
Ciclo de encendido/apagado	50.000
Datos técnicos de la luz	
Ángulo de haz (nom.)	36 °
Índice de reproducción cromática (IRC)	80
LLMF al fin de vida útil nominal (nom.)	70 %
Operativos y eléctricos	
Frecuencia de entrada	- Hz
Line Frequency	- Hz
Hora de inicio (nom.)	0,5 s
Controles y regulación	
Regulable	No

Información general

Order Code	Full Product Name	Base del casquillo	Vida útil nominal
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	GU5.3	15.000 hora(s)
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	GU5.3	15.000 hora(s)
81471000	CorePro LED spot ND 7-50W MR16 827 36D	GU5.3	15.000 hora(s)
81477200	CorePro LED spot ND 7-50W MR16 830 36D	GU5.3	15.000 hora(s)
81479600	CorePro LED spot ND 7-50W MR16 840 36D	GU5.3	15.000 hora(s)
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	GU5.3	15.000 hora(s)
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	GU4	25.000 hora(s)

Datos técnicos de la luz

Order Code	Full Product Name	Temperatura de color	Código de color	Flujo luminoso	Intensidad
		correlacionada (nom.)			luminosa (nom.)
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	2700 K	827	345 lm	650 cd
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	4000 K	840	390 lm	750 cd
81471000	CorePro LED spot ND 7-50W MR16 827 36D	2700 K	827	621 lm	1.400 cd
81477200	CorePro LED spot ND 7-50W MR16 830 36D	3000 K	830	621 lm	1.400 cd

Order Code	Full Product Name	Temperatura de color	Código de color	Flujo luminoso	Intensidad
		correlacionada (nom.)			luminosa (nom.)
81479600	CorePro LED spot ND 7-50W MR16 840 36D	4000 K	840	660 lm	1.500 cd
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	2700 K	827	230 lm	560 cd
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	2700 K	827	184 lm	400 cd

Operativos y eléctricos

Order Code	Full Product Name	Consumo de energía	Equivalente de potencia
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	4,4 W	35 W
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	4,4 W	35 W
81471000	CorePro LED spot ND 7-50W MR16 827 36D	7 W	50 W
81477200	CorePro LED spot ND 7-50W MR16 830 36D	7 W	50 W

Order Code	Full Product Name	Consumo de energía	Equivalente de potencia
81479600	CorePro LED spot ND 7-50W MR16 840 36D	7 W	50 W
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	2,9 W	20 W
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	2,3 W	20 W

Temperatura

CorePro LEDspot 12V

Order Code	Full Product Name	Temperatura máxima (nom.)
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	85 °C
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	85 °C
81471000	CorePro LED spot ND 7-50W MR16 827 36D	85 °C
81477200	CorePro LED spot ND 7-50W MR16 830 36D	85 °C

Order Code	Full Product Name	Temperatura máxima (nom.)
81479600	CorePro LED spot ND 7-50W MR16 840 36D	85 °C
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	75 °C
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	60 °C



Mecánicos y de carcasa

Order Code	Full Product Name	Acabado de la bombilla	Forma de la bombilla
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	-	MR16
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	-	MR16
81471000	CorePro LED spot ND 7-50W MR16 827 36D	-	MR16
81477200	CorePro LED spot ND 7-50W MR16 830 36D	-	MR16


Order Code	Full Product Name	Acabado de la bombilla	Forma de la bombilla
81479600	CorePro LED spot ND 7-50W MR16 840 36D	-	MR16
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	-	MR16
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	Transparente	MR11

Aprobación y aplicación


Order Code	Full Product Name	Consumo energético kWh/ 1000 h
30706300	CorePro LED spot ND 4.4-35W MR16 827 36D	5 kWh
30708700	CorePro LED spot ND 4.4-35W MR16 840 36D	5 kWh
81471000	CorePro LED spot ND 7-50W MR16 827 36D	7 kWh
81477200	CorePro LED spot ND 7-50W MR16 830 36D	7 kWh
81479600	CorePro LED spot ND 7-50W MR16 840 36D	7 kWh
30704900	CorePro LED spot ND 2.9-20W MR16 827 36D	3 kWh
65948600	CorePro LED spot 2.3-20W 827 MR11 36D	3 kWh

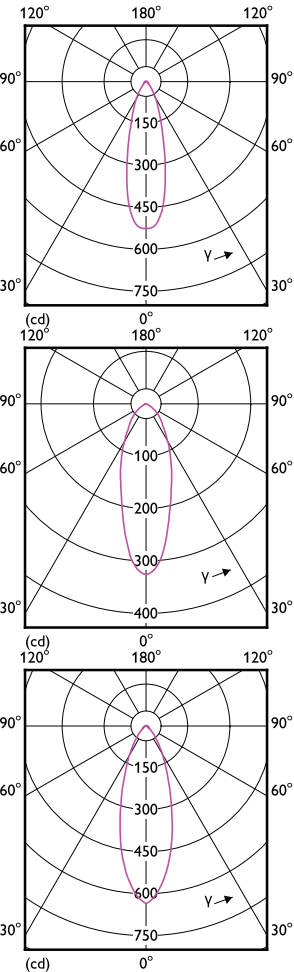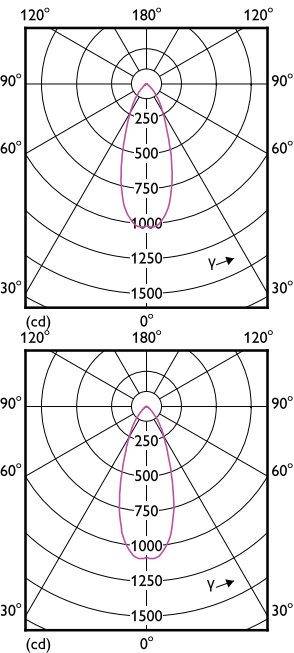


CorePro LEDspot 12V




Accent Diagrams




Accent Diagram - CorePro LED spot ND
2.9-20W MR16 827 36D




Accent Diagram - CorePro LED spot ND 7-50W
MR16 840 36D




Accent Diagram - CorePro LED spot ND 7-50W
MR16 827 36D



Accent Diagram - CorePro LED spot 2.3-20W
827 MR11 36D




Accent Diagram - CorePro LED spot ND
4.4-35W MR16 840 36D




Accent Diagram - CorePro LED spot ND
4.4-35W MR16 827 36D


Beam Diagrams

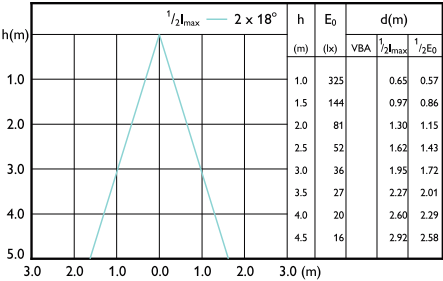


Beam diagram - CorePro LED spot 2.3-20W 827 MR11 36D

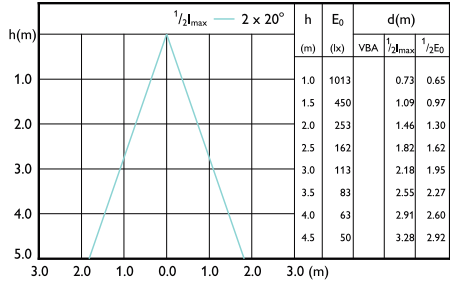


Beam diagram - CorePro LED spot ND 7-50W MR16 827 36D

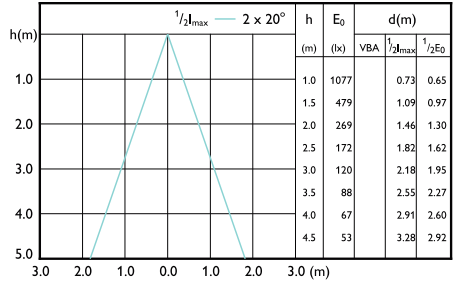


Beam diagram - CorePro LED spot ND 7-50W MR16 840 36D

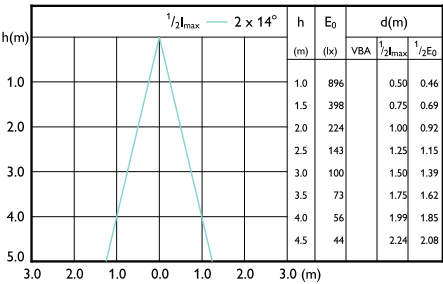

Beam diagram - CorePro LED spot ND 4.4-35W MR16 840 36D

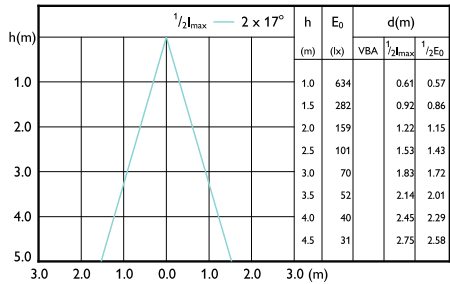

Beam diagram - CorePro LED spot ND 4.4-35W MR16 827 36D

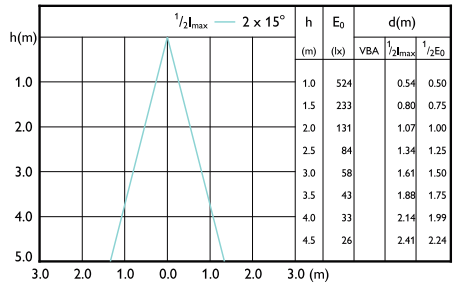

Beam diagram - CorePro LED spot ND 2.9-20W MR16 827 36D

