



Philips CoreLine recessed: easy installation, excellent illumination.

CoreLine recessed

Philips CoreLine recessed delivers on the CoreLine promise of innovative, easy-to-use, high-quality luminaires. It's a high-quality recessed LED that's designed to replace existing recessed luminaires with T8 or T5 technology. This CoreLine family also features an innovative new choice of multiple lumen outputs in one single luminaire, called MultiLumen. Instant energy savings and a longer lifetime, make this is an environmentally-friendly and cost-saving solution. With a quick-connector or Wieland feature, CoreLine RC136B recessed luminaires are quick and easy to install. Also available within the range are Interact Ready luminaires with integrated wireless communications, which are fully compatible with Interact gateways, sensors and software.

Benefits

- MultiLumen: a choice of different lumen outputs in one single luminaire
- New connector offers quick and simple installation
- Energy savings and longer lifetime to reduce operating costs

Features

- MultiLumen: different lumen outputs ranging from 2800 lumen to 4300 lumen in one single luminaire
- Easy connector for faster installation: quick connector or Wieland connector
- Energy efficient and long lifetime: up to 140 lm/W and 50,000 hours @L80 lifetime
- Many flicker-free drivers available: On/off (PSU), dimming (Dali) and integrated wireless connectivity (Interact Ready)
- Office compliant versions (OC) & Non-office compliant versions (NOC)
- High lumen available: up to 6000 lm (OC)
- Optional versions available: Emergency Lighting (EL) & Wieland/Adels connectors (W)

Application

- Offices
- Healthcare
- Education

Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that The environment in which The luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

Versions



RC136B 31S_37S_43S/840 PSU
W60L60 NOC W3_SPP



RC136B 31S_37S_43S/840 PSD
W30L120 OC_SPP



RC136B 31S_37S_43S/840 PSU
W60L60 OC_SPP



RC136B 28S_34S_40S/830 PSU
W60L60 NOC W3_SPP

CoreLine recessed

Versions

RC136B 31S_37S_43S/840 PSD
W60L60 NOC W5_SPP



RC136B 28S_34S_40S/830 PSD
W60L60 OC _SPP



RC136B 31S_37S_43S/840 PSD
W60L60 OC _SPP



RC136B 28S_34S_40S/830 PSD
W30L120 OC _SPP



CoreLine Recessed



RC136B 31S_37S_43S/840 PSD
W60L60 OC W5_SPP



RC136B 28S_34S_40S/830 PSD
W60L60 OC W5 _SPP



RC136B 28S_34S_40S/830 PSU
W60L60 NOC _SPP



RC136B 31S_37S_43S/840 PSU
W60L60 NOC _SPP



RC136B 31S_37S_43S/840 PSD
W60L60 NOC _SPP




CoreLine recessed

Versions

RC136B 31S_37S_43S/840 PSU
W60L60 OC W3_SPP



Dimensional drawing

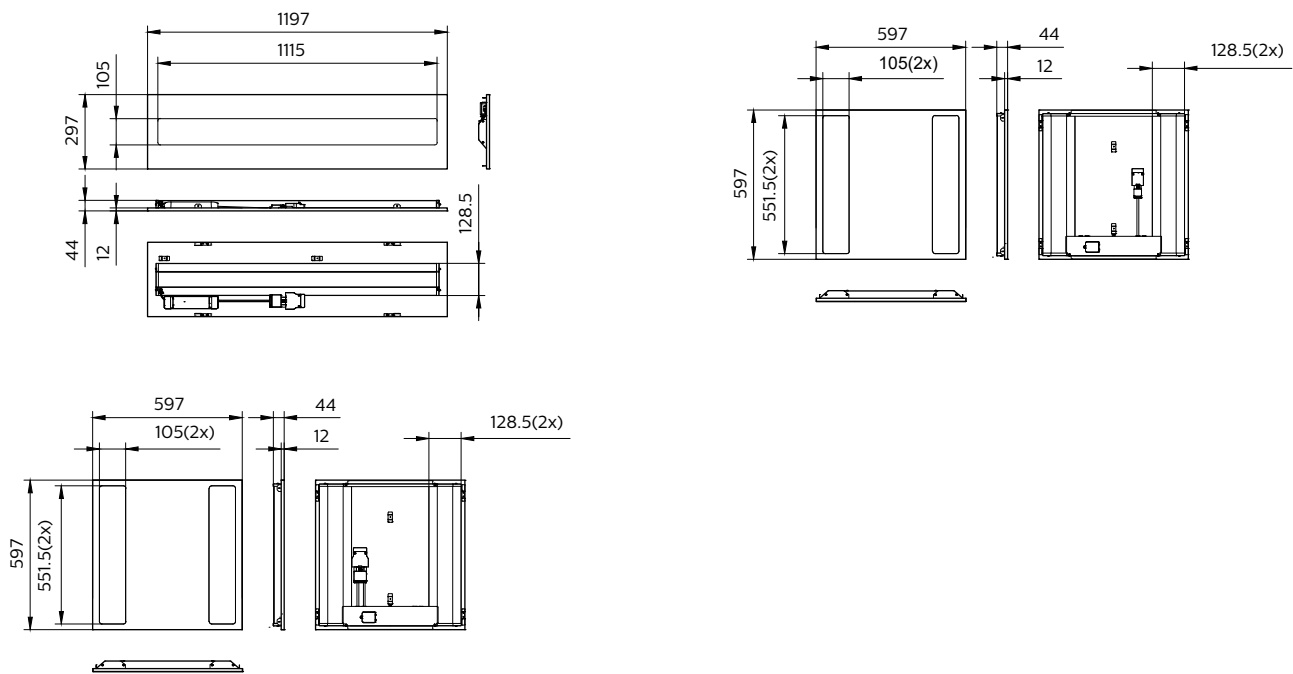


Product details

CoreLine Recessed Backside



CoreLine Recessed Backside with connector




Product details

CoreLine Recessed Backside



CoreLine Recessed connector PSD
(dali)



CoreLine Recessed in ceiling

CoreLine_Recessed_RC136B_60x
60




CoreLine Recessed Wileland

CoreLine Recessed



CoreLine Recessed connector PSU
(On/Off))

CoreLine Recessed connector PSU
(On/Off))



CoreLine Recessed Edge




CoreLine recessed

Product details

CoreLine Recessed Edge



CoreLine Recessed connector PSU (On/Off))



CoreLine Recessed Safety Cable



CoreLine Recessed in ceiling



Wieland W5 Dali Connector



General Information	
Driver included	Yes
Light source replaceable	No
Number of gear units	1 unit
Service tag	Yes
Light Technical	
Color rendering index (CRI)	>80
Operating and Electrical	
Input Voltage	220-240 V
Line Frequency	50 or 60 Hz
Suitable for random switching	Yes
Mechanical and Housing	
Housing Color	White
Mech. impact protection code	IK03
Ingress protection code	IP20/44
Approval and Application	
CE mark	Yes
ENEC mark	ENEC mark
Flammability mark	For mounting on normally flammable surfaces
Glow-wire test	Temperature 650 °C, duration 30 s
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%

Light Technical (1/2)

Order Code	Full Product Name	All-in Type	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)	Luminous Flux
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	All-in, Multi Lumen	4000 K	126 lm/W	3,100 lm
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	All-in, Multi Lumen	4000 K	126 lm/W	3,100 lm
911401808285	RC136B 60S/840 PSU W60L60 OC	-	4000 K	135 lm/W	6,000 lm
911401808385	RC136B 60S/840 PSD W60L60 OC	-	4000 K	135 lm/W	6,000 lm
911401867482	RC136B 40S/830 WIA W60L60 OC W3	-	3000 K	135 lm/W	4,000 lm
911401867582	RC136B 43S/840 WIA W60L60 OC W3	-	4000 K	140 lm/W	4,300 lm
911401896681	RC136B 40S/830 WIA W60L60 OC	-	3000 K	135 lm/W	4,000 lm
911401896781	RC136B 43S/840 WIA W60L60 OC	-	4000 K	140 lm/W	4,300 lm
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	All-in, Multi Lumen	3000 K	130 lm/W	2,800 lm
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	All-in, Multi Lumen	3000 K	130 lm/W	2,800 lm
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	All-in, Multi Lumen	3000 K	130 lm/W	2,800 lm
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	All-in, Multi Lumen	3000 K	118 lm/W	2,800 lm
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	All-in, Multi Lumen	4000 K	126 lm/W	3,100 lm
911401867382	RC136B 43S/840 WIA W30L120 OC	-	4000 K	140 lm/W	4,300 lm
911401867682	RC136B 43S/840 WIA W30L120 OC W3	-	4000 K	140 lm/W	4,300 lm
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	All-in, Multi Lumen	3000 K	130 lm/W	2,800 lm
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	All-in, Multi Lumen	3000 K	130 lm/W	2,800 lm
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	All-in, Multi Lumen	4000 K	140 lm/W	3,100 lm

Order Code	Full Product Name	All-in Type	Correlated Color	Luminous	
			Temperature (Nom)	Efficacy (rated) (Nom)	Luminous Flux
911401880581	RC136B 31S_37S_43S/840	All-in, Multi	4000 K	140 lm/W	3,100 lm
	PSD W60L60 NOC	Lumen			
911401881281	RC136B 31S_37S_43S/840	All-in, Multi	4000 K	140 lm/W	3,100 lm
	PSU W60L60 OC W3	Lumen			

Light Technical (2/2)

Order Code	Full Product Name	Optic type	Order Code	Full Product Name	Optic type
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	Wide beam	911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	Beam angle 84°
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	Wide beam	911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	Beam angle 84°
911401808285	RC136B 60S/840 PSU W60L60 OC	Beam angle 84°	911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	Beam angle 84°
911401808385	RC136B 60S/840 PSD W60L60 OC	Beam angle 84°	910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	Wide beam
911401867482	RC136B 40S/830 WIA W60L60 OC W3	Beam angle 84°	910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	Wide beam
911401867582	RC136B 43S/840 WIA W60L60 OC W3	Beam angle 84°	911401867382	RC136B 43S/840 WIA W30L120 OC	Beam angle 84°
911401896681	RC136B 40S/830 WIA W60L60 OC	Beam angle 84°	911401867682	RC136B 43S/840 WIA W30L120 OC W3	Beam angle 84°
911401896781	RC136B 43S/840 WIA W60L60 OC	Beam angle 84°	911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	Beam angle 84°
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	Beam angle 100°	911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	Beam angle 84°
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	Beam angle 84°	911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	Beam angle 100°
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	Beam angle 84°	911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	Beam angle 100°
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	Beam angle 100°	911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	Beam angle 100°
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	Beam angle 100°	911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	Beam angle 84°

Operating and Electrical

Order Code	Full Product Name	Protection class	Power	Order Code	Full Product Name	Protection class	Power
		IEC	Consumption			IEC	Consumption
910505101241	RC136B 31S_37S_43S/840 PSD	Safety class II	34 W	911401881081	RC136B 28S_34S_40S/830 PSU	Safety class I	31 W
	W60L60 OCELB3				W60L60 NOC W3		
910505101242	RC136B 31S_37S_43S/840 PSU	Safety class I	34 W	911401881381	RC136B 31S_37S_43S/840 PSD	Safety class II	31 W
	W60L60NOCELB3				W60L60 NOC W5		
911401808285	RC136B 60S/840 PSU W60L60	Safety class II	44 W	911401880681	RC136B 28S_34S_40S/830 PSD	Safety class II	31 W
	OC				W60L60 OC		
911401808385	RC136B 60S/840 PSD W60L60	Safety class II	44 W	911401880781	RC136B 31S_37S_43S/840 PSD	Safety class II	31 W
	OC				W60L60 OC		
911401867482	RC136B 40S/830 WIA W60L60	Safety class II	31 W	911401880881	RC136B 28S_34S_40S/830 PSD	Safety class II	31 W
	OC W3				W30L120 OC		
911401867582	RC136B 43S/840 WIA W60L60	Safety class II	31 W	910505101244	RC136B 28S_34S_40S/830 PSD	Safety class II	34 W
	OC W3				W30L120OCELB3		
911401896681	RC136B 40S/830 WIA W60L60	Safety class II	31 W	910505101245	RC136B 31S_37S_43S/840 PSD	Safety class II	34 W
	OC				W30L120OCELB3		
911401896781	RC136B 43S/840 WIA W60L60	Safety class II	31 W	911401867382	RC136B 43S/840 WIA W30L120	Safety class II	31 W
	OC				OC		
911401881181	RC136B 31S_37S_43S/840 PSU	Safety class I	31 W	911401867682	RC136B 43S/840 WIA W30L120	Safety class II	31 W
	W60L60 NOC W3				OC W3		
911401880981	RC136B 31S_37S_43S/840 PSD	Safety class II	31 W	911401881581	RC136B 31S_37S_43S/840 PSD	Safety class II	31 W
	W30L120 OC				W60L60 OC W5		
911401880481	RC136B 31S_37S_43S/840 PSU	Safety class I	31 W	911401881481	RC136B 28S_34S_40S/830 PSD	Safety class II	31 W
	W60L60 OC				W60L60 OC W5		

CoreLine recessed

Order Code	Full Product Name	Protection class	Power
		IEC	Consumption
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	Safety class I	31 W
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	Safety class I	31 W

Order Code	Full Product Name	Protection class	Power
		IEC	Consumption
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	Safety class II	31 W
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	Safety class I	31 W

Controls and Dimming

Order Code	Full Product Name	Dimmable	Maximum dim
			level
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	Yes	3%
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	No	-
911401808285	RC136B 60S/840 PSU W60L60 OC	No	-
911401808385	RC136B 60S/840 PSD W60L60 OC	Yes	3%
911401867482	RC136B 40S/830 WIA W60L60 OC W3	Yes	1%
911401867582	RC136B 43S/840 WIA W60L60 OC W3	Yes	1%
911401896681	RC136B 40S/830 WIA W60L60 OC	Yes	1%
911401896781	RC136B 43S/840 WIA W60L60 OC	Yes	1%
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	No	-
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	Yes	3%
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	No	-
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	No	-
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	Yes	3%
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	Yes	3%
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	Yes	3%

Order Code	Full Product Name	Dimmable	Maximum dim
			level
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	Yes	3%
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	Yes	3%
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	Yes	3%
911401867382	RC136B 43S/840 WIA W30L120 OC	Yes	1%
911401867682	RC136B 43S/840 WIA W30L120 OC W3	Yes	1%
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	Yes	3%
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	Yes	3%
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	No	-
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	No	-
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	Yes	3%
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	No	-

Emergency Operation

Order Code	Full Product Name	Central Emergency	Emergency lighting	Rated duration of the emergency lighting (when fully charged)
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	No	Emergency lighting 3 hours duration basic version	3 hour(s)
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	No	Emergency lighting 3 hours duration basic version	3 hour(s)

Order Code	Full Product Name	Central Emergency	Emergency lighting	Rated duration of the emergency lighting (when fully charged)
911401808285	RC136B 60S/840 PSU W60L60 OC	-	-	-
911401808385	RC136B 60S/840 PSD W60L60 OC	-	-	-
911401867482	RC136B 40S/830 WIA W60L60 OC W3	-	-	-
911401867582	RC136B 43S/840 WIA W60L60 OC W3	-	-	-
911401896681	RC136B 40S/830 WIA W60L60 OC	-	-	-

Order Code	Full Product Name	Central		Emergency lighting	Rated duration of the emergency lighting (when fully charged)
		Emergency	Emergency		
911401896781	RC136B 43S/840 WIA W60L60 OC	-	-	-	-
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	-	-	-	-
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	-	-	-	-
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	-	-	-	-
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	-	-	-	-
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	-	-	-	-
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	-	-	-	-
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	-	-	-	-
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	-	-	-	-
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	No	Emergency lighting 3 hours	3 hour(s)	

				Rated duration of the emergency lighting (when fully charged)
Order Code	Full Product Name	Central Emergency	Emergency lighting	
			duration basic version	
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	No	Emergency lighting 3 hours duration basic version	3 hour(s)
911401867382	RC136B 43S/840 WIA W30L120 OC	-	-	-
911401867682	RC136B 43S/840 WIA W30L120 OC W3	-	-	-
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	-	-	-
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	-	-	-
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	-	-	-
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	-	-	-
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	-	-	-
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	-	-	-

Approval and Application

Order Code	Full Product Name	Ambient		Stroboscopic effect visibility measure (SVM)
		temperature range	temperature range	
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	0 to +25 °C	0.4	
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	-10 to +40 °C	0.4	
911401808285	RC136B 60S/840 PSU W60L60 OC	-10 to +35 °C	0.4	
911401808385	RC136B 60S/840 PSD W60L60 OC	-10 to +35 °C	0.4	
911401867482	RC136B 40S/830 WIA W60L60 OC W3	-10 to +40 °C	0.4	
911401867582	RC136B 43S/840 WIA W60L60 OC W3	-10 to +40 °C	0.4	
911401896681	RC136B 40S/830 WIA W60L60 OC	-10 to +40 °C	0.4	
911401896781	RC136B 43S/840 WIA W60L60 OC	-10 to +40 °C	0.4	

Order Code	Full Product Name	Ambient		Stroboscopic effect visibility measure (SVM)
		temperature range	temperature range	
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	-10 to +40 °C	1.6	
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	-10 to +40 °C	1.6	
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	-10 to +40 °C	1.6	
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	-10 to +40 °C	1.6	
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	-10 to +40 °C	1.6	
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	-10 to +40 °C	1.6	
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	-10 to +40 °C	1.6	
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	-10 to +40 °C	1.6	

CoreLine recessed

Order Code	Full Product Name	Ambient temperature range	Stroboscopic effect visibility measure (SVM)
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	0 to +25 °C	0.4
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	0 to +25 °C	0.4
911401867382	RC136B 43S/840 WIA W30L120 OC	-10 to +40 °C	0.4
911401867682	RC136B 43S/840 WIA W30L120 OC W3	-10 to +40 °C	0.4
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	-10 to +40 °C	1.6

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	(0.38, 0.38) SDCM ≤3
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	(0.38, 0.38) SDCM ≤3
911401808285	RC136B 60S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401808385	RC136B 60S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401867482	RC136B 40S/830 WIA W60L60 OC W3	(0.43, 0.40) SDCM ≤3
911401867582	RC136B 43S/840 WIA W60L60 OC W3	(0.38, 0.38) SDCM ≤3
911401896681	RC136B 40S/830 WIA W60L60 OC	(0.43, 0.40) SDCM ≤3
911401896781	RC136B 43S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	(0.38, 0.38) SDCM ≤3
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	(0.38, 0.38) SDCM ≤3
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	(0.43, 0.40) SDCM ≤3


Product Data

Order Code	Full Product Name	Product family code
910505101241	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	RC136B
910505101242	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	RC136B
911401808285	RC136B 60S/840 PSU W60L60 OC	-
911401808385	RC136B 60S/840 PSD W60L60 OC	-
911401867482	RC136B 40S/830 WIA W60L60 OC W3	-
911401867582	RC136B 43S/840 WIA W60L60 OC W3	-
911401896681	RC136B 40S/830 WIA W60L60 OC	-
911401896781	RC136B 43S/840 WIA W60L60 OC	-
911401881181	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	-
911401880981	RC136B 31S_37S_43S/840 PSD W30L120 OC	-
911401880481	RC136B 31S_37S_43S/840 PSU W60L60 OC	-
911401881081	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	-
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	-


Order Code	Full Product Name	Ambient temperature range	Stroboscopic effect visibility measure (SVM)
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	-10 to +40 °C	1.6
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	-10 to +40 °C	1.6
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	-10 to +40 °C	1.6
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	-10 to +40 °C	1.6
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	-10 to +40 °C	1.6

Order Code	Full Product Name	Initial chromaticity
911401881381	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	(0.38, 0.38) SDCM ≤3
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	(0.43, 0.40) SDCM ≤3
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	(0.43, 0.40) SDCM ≤3
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	(0.43, 0.40) SDCM ≤3
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	(0.38, 0.38) SDCM ≤3
911401867382	RC136B 43S/840 WIA W30L120 OC	(0.38, 0.38) SDCM ≤3
911401867682	RC136B 43S/840 WIA W30L120 OC W3	(0.38, 0.38) SDCM ≤3
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	(0.38, 0.38) SDCM ≤3
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	(0.43, 0.40) SDCM ≤3
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	(0.43, 0.40) SDCM ≤3
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	(0.38, 0.38) SDCM ≤3


Order Code	Full Product Name	Product family code
911401880681	RC136B 28S_34S_40S/830 PSD W60L60 OC	-
911401880781	RC136B 31S_37S_43S/840 PSD W60L60 OC	-
911401880881	RC136B 28S_34S_40S/830 PSD W30L120 OC	-
910505101244	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	RC136B
910505101245	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	RC136B
911401867382	RC136B 43S/840 WIA W30L120 OC	-
911401867682	RC136B 43S/840 WIA W30L120 OC W3	-
911401881581	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	-
911401881481	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	-
911401880281	RC136B 28S_34S_40S/830 PSU W60L60 NOC	-
911401880381	RC136B 31S_37S_43S/840 PSU W60L60 NOC	-
911401880581	RC136B 31S_37S_43S/840 PSD W60L60 NOC	-
911401881281	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	-




Polar Normal (separate) - RC136BI -
910505101242



Polar Normal (separate) - null - 911401808285




Polar Normal (separate) - null - 911401867382



Polar Normal (separate) - null - 911401867682


Polar Wide Diagrams

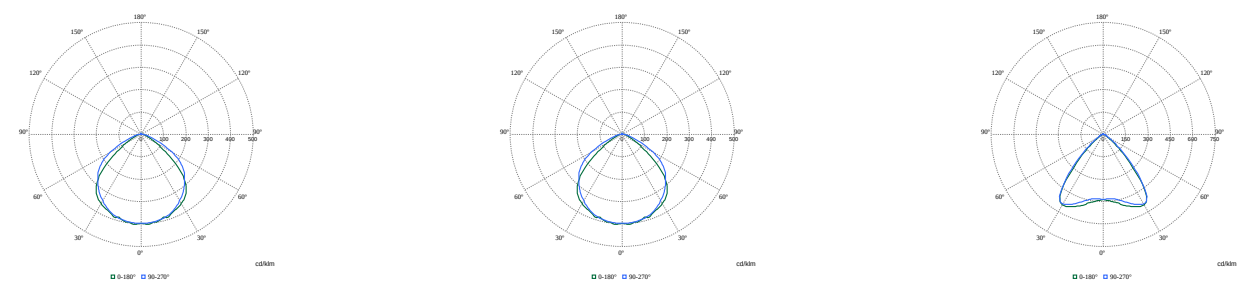

Polar Normal (separate) - null - 911401880281

Polar Normal (separate) - null - 911401880381


Polar Normal (separate) - null - 911401880481

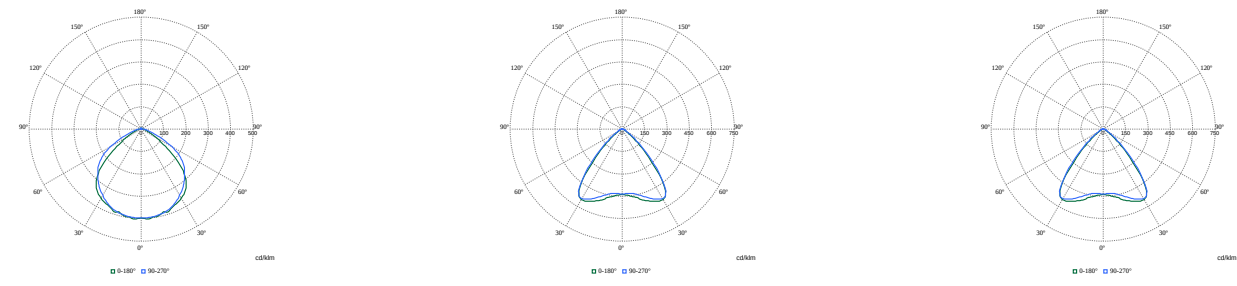

Polar Normal (separate) - null - 911401880581

Polar Normal (separate) - null - 911401880681


Polar Normal (separate) - null - 911401880881

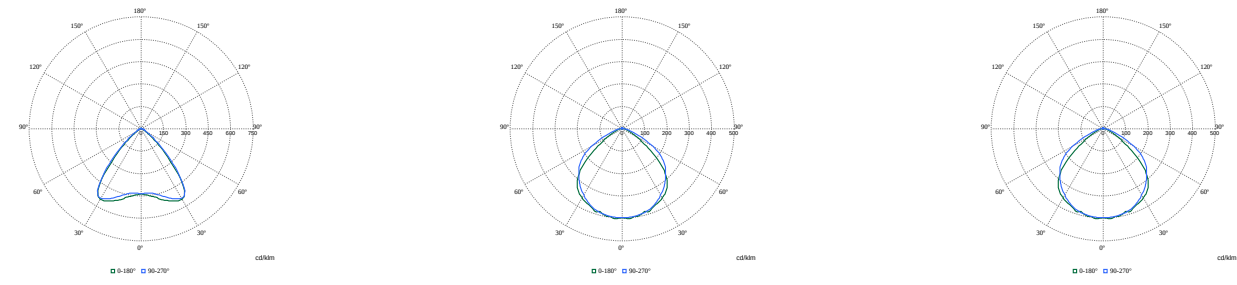

Polar Normal (separate) - null - 911401880981

Polar Normal (separate) - null - 911401881081

Polar Normal (separate) - null - 911401881181

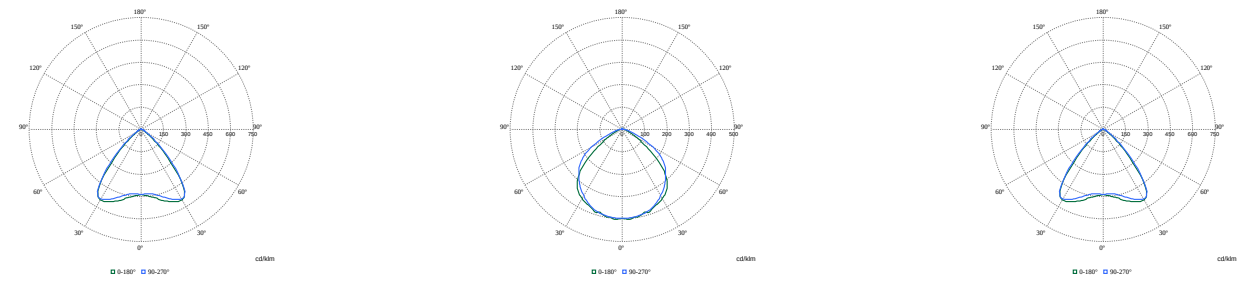


Polar Normal (separate) - null - 911401881281


Polar Normal (separate) - null - 911401881381

Polar Normal (separate) - null - 911401881481


Polar Wide Diagrams



Polar Normal (separate) - null - 911401881581



Polar Normal (separate) - null - 911401896681



Polar Normal (separate) - null - 911401896781

