

Philips CoreLine panel: easy installation, excellent illumination

CoreLine Panel gen6

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

Benefits

- Low-risk, reliable products
- Work faster with these easy-to-install products
- No confusion with easy product selection
- Stay relevant by joining IoT / connected lighting systems

CoreLine Panel gen6

Features

- L90@50K hrs/ L80@100K hrs with 5-year warranty
- Quick connector (green/white, Flywire, WAGO, and Schuko)
- High lumen office-compliant and non-office compliant versions
- CRI 80/CRI 90 at SDCM <3
- CRI 80 4000 K 140 lm/Wand 3000 K > 130 lm/W, CRI 90 >115 lm/W
- UltraEfficient 4000 K >160 lm/W
- All-in: multiple lumen packages and color temperatures in one luminaire

Application

- Offices
- Healthcare
- Municipal buildings
- Education

Versions

CoreLine panel G6 W30L120 RTP



CoreLine panel G6 W60L60 IP65-IP20





CoreLine panel G6 PSU W30L120 SIA Sensor RTP



Philips CoreLine panel G6 All in W62L62











Dimensional drawing

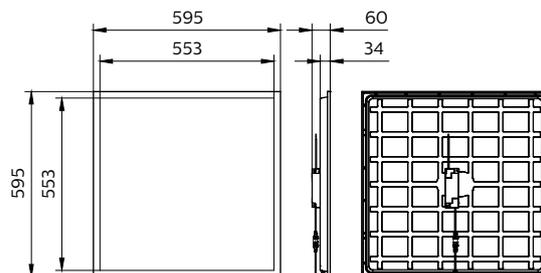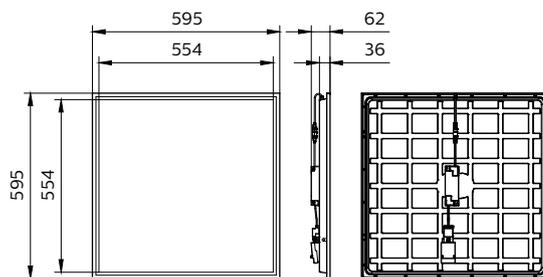









CoreLine Panel gen6

Dimensional drawing

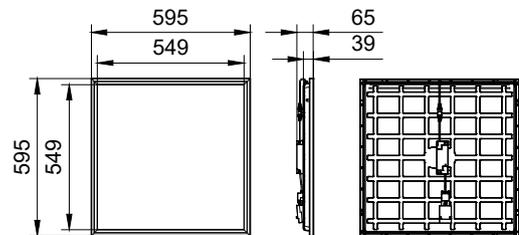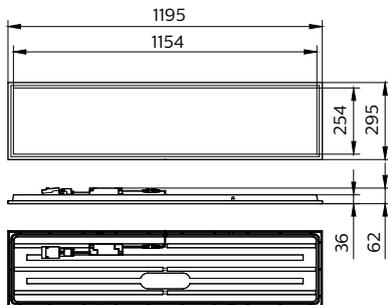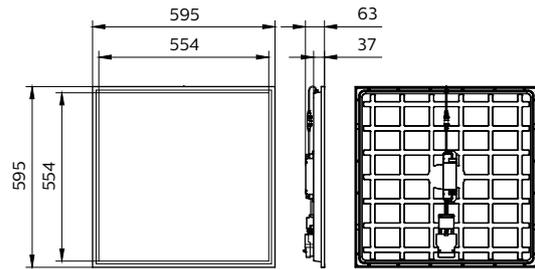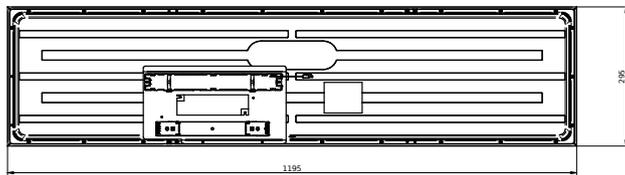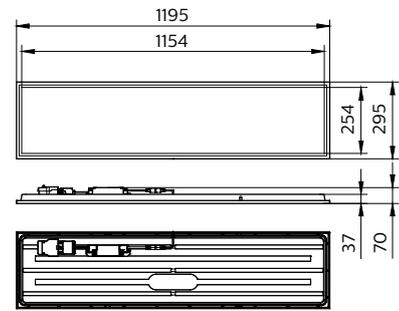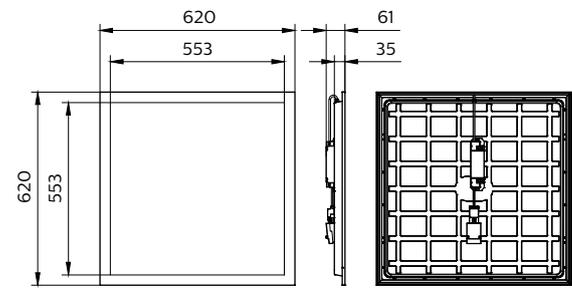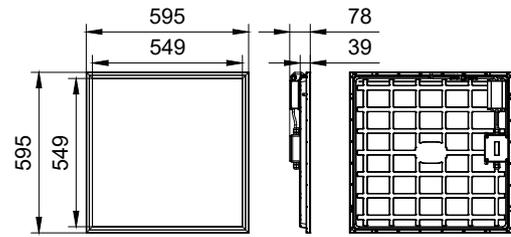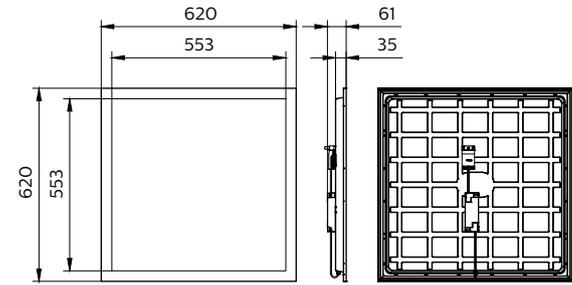










CoreLine Panel gen6

Dimensional drawing

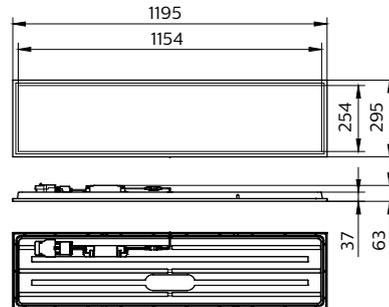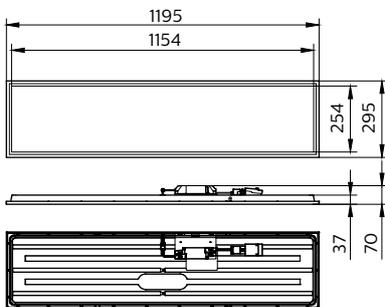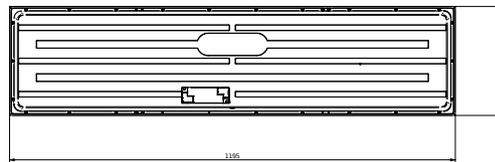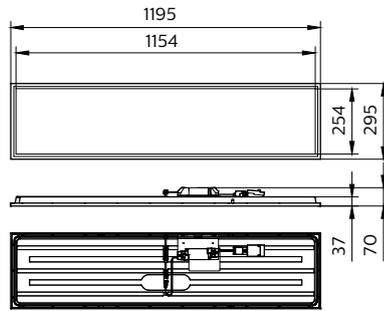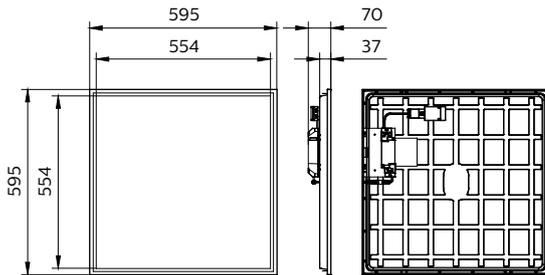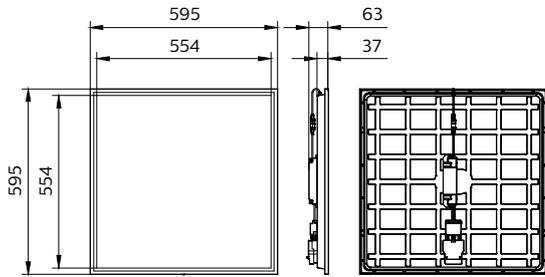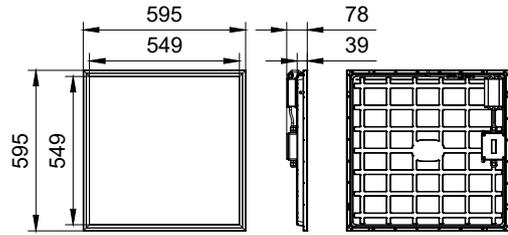











CoreLine Panel gen6

Dimensional drawing

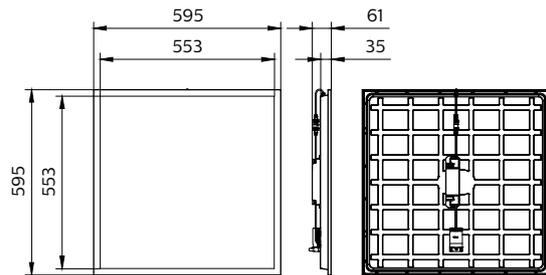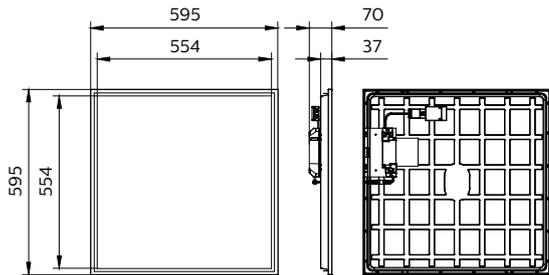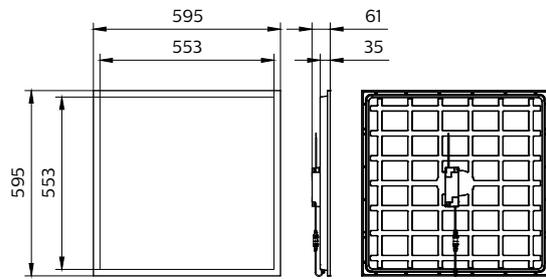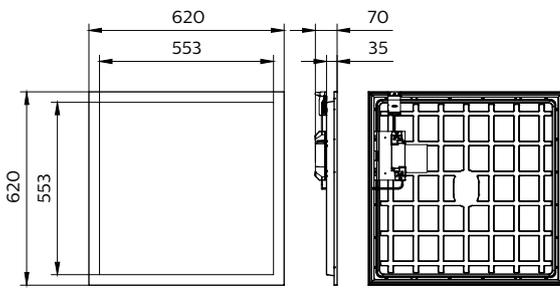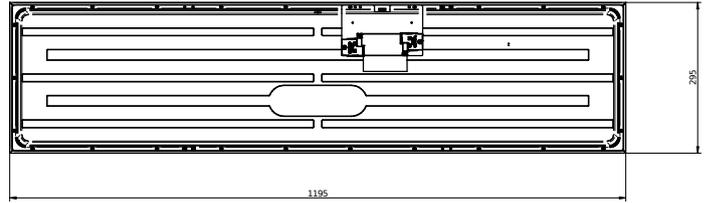






CoreLine Panel gen6

Dimensional drawing

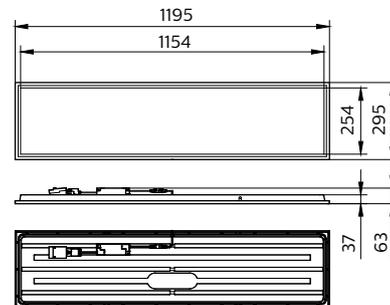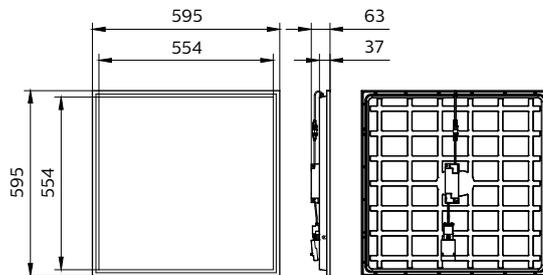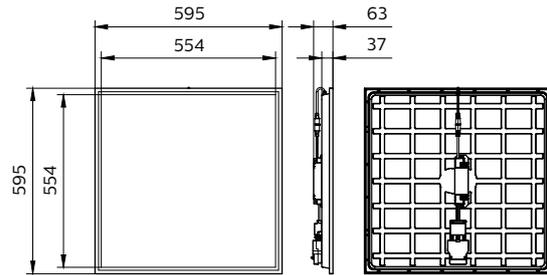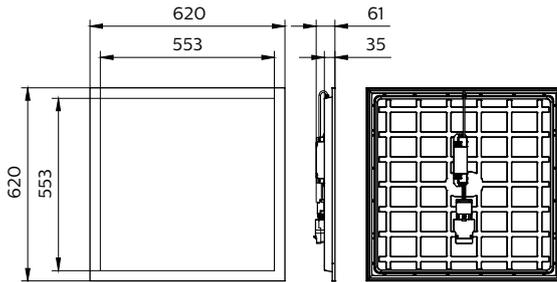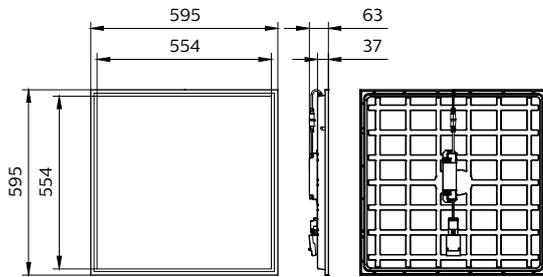

CoreLine Panel gen6

Dimensional drawing

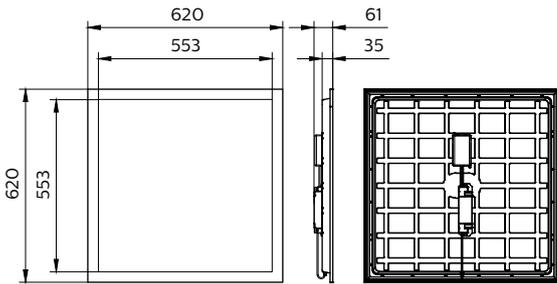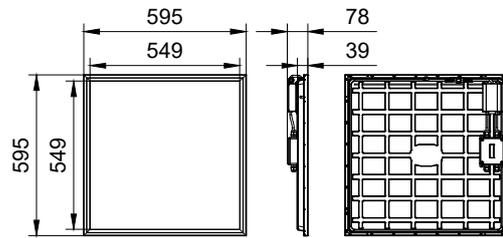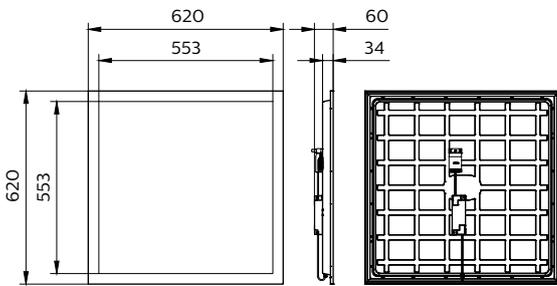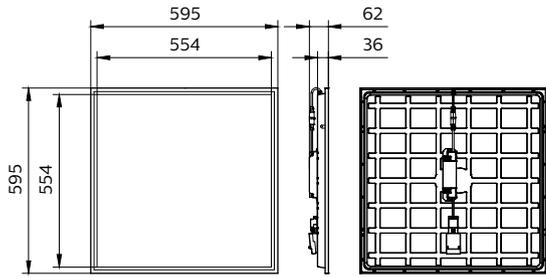

Product details

CoreLine panel G6 PSU Green
connector fits Wieland W3
connector



CoreLine connector Wago WA3



CoreLine Panel gen6

Product details




CoreLine panel G6 PSU W60L60
back side DPP



CoreLine panel G6 IP65 PSU driver



CoreLine panel G6 PSU W30L120
SIA Sensor back side DPP



CoreLine panel G6 PSU driver DPP



CoreLine panel G6 WIA back side
DPP



CoreLine panel G6 W62L62 OC
Optical window DPP



CoreLine panel G6 WIA W62L62
back side DPP



CoreLine panel G6 PSU W30L120
back side DPP



CoreLine panel G6 PSD W30L120
back side DPP



CoreLine panel G6 PSD driver
open DPP

CoreLine Panel gen6

Product details


CoreLine panel G6 PSD All in
W60L60 back side DPP



CoreLine panel G6 IP65 PSD driver



CoreLine panel G6 side angle DPP



CoreLine panel G6 back side IP65
IP20



CoreLine connector wago WA5



CoreLine panel G6 WIA driver DPP



CoreLine panel G6 NOC Optical
window DPP



CoreLine panel G6 All in driver
open DPP



CoreLine panel G6 All in driver
DPP



CoreLine Panel gen6

Product details



CoreLine panel G6 PSU driver
open DPP



CoreLine panel G6 PSD W60L60
back side DPP



CoreLine connector Schuko CCE



CoreLine panel G6 IP65 PSD back
side



CoreLine panel G6 W60L60 OC
Optical window DPP



CoreLine panel G6 IP65 PSU back
side



CoreLine panel G6 PSD driver DPP



CoreLine panel G6 PSU W62L62
back side DPP

CoreLine Panel gen6

General Information

Driver included	Yes
Number of gear units	1 unit

Operating and Electrical

Protection class IEC	Safety class II
----------------------	-----------------

Approval and Application

CE mark	Yes
ENEC mark	ENEC mark
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4

Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
-------------------------	-------------

General Information

Order Code	Full Product Name	Service tag
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	Yes
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	Yes
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	Yes
911401802887	RC132V G6 36S/840 WIA W30L120 OC	Yes
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	Yes
911401890785	RC132V G6 36S/840 PSU W30L120 OC	Yes
911401891085	RC132V G6 36S/840 PSD W30L120 OC	Yes
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	Yes
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	Yes
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	Yes
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	Yes
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	Yes
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	Yes
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	Yes
911401800387	RC132V G6 50S/840 PSD W60L60 OC	Yes
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	Yes
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	Yes
911401802187	RC132V G6 34S/830 WIA W60L60 OC	Yes
911401802287	RC132V G6 36S/840 WIA W60L60 OC	Yes
911401802487	RC132V G6 43S/840 WIA W60L60 OC	Yes
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	Yes
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	Yes
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	Yes
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	Yes
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	Yes
911401807687	RC132V G6 34S/830 PSU W60L60 OC	Yes
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	Yes
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	Yes
911401890585	RC132V G6 36S/840 PSU W60L60 OC	Yes
911401890885	RC132V G6 36S/840 PSD W60L60 OC	Yes
910505102804	RC133V G6 36S/840 PSED W62L62 OC	Yes
911401802687	RC133V G6 36S/840 WIA W62L62 OC	Yes
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	Yes
911401890685	RC133V G6 36S/840 PSU W62L62 OC	Yes
911401890985	RC133V G6 36S/840 PSD W62L62 OC	Yes
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	Yes
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	-
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	Yes
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	Yes
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	Yes
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	Yes

CoreLine Panel gen6

Order Code	Full Product Name	Service tag
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCE	Yes
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	Yes
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	Yes
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes

Light Technical (1/2)

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color renderi index (CRI)	Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	-	90 degree(s)	4000 K	>80	910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	-	90 degree(s)	3000 K	>80	910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80	910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80	911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80	911401800387	RC132V G6 50S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	-	90 degree(s)	4000 K	>80	911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-	90 degree(s)	4000 K	>80
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-	90 degree(s)	4000 K	>80	911401802187	RC132V G6 34S/830 WIA W60L60 OC	-	90 degree(s)	3000 K	>80
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-	120 degree(s)	4000 K	>80	911401802287	RC132V G6 36S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-	90 degree(s)	4000 K	>80	911401802487	RC132V G6 43S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-	90 degree(s)	4000 K	>80	911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	120 degree(s)	4000 K	>90	911401807087	RC132V G6 43S/840 PSU W60L60 OC BN	-	120 degree(s)	4000 K	>80
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-	90 degree(s)	4000 K	>90	911401807187	RC132V G6 50S/840 PSU W60L60 NOC BN	-	90 degree(s)	4000 K	>80
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-	90 degree(s)	4000 K	>90	911401807287	RC132V G6 50S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	120 degree(s)	4000 K	>80	911401807587	RC132V G6 36S/UE840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
						911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-	120 degree(s)	3000 K	>80
						911401807687	RC132V G6 34S/830 PSU W60L60 OC	-	90 degree(s)	3000 K	>80
						911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	-	90 degree(s)	4000 K	>80

CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color render index (CRI)	Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80	911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80	910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80	910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102804	RC133V G6 36S/840 PSED W62L62 OC	-	90 degree(s)	4000 K	>80	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-	90 degree(s)	4000 K	>80	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-	120 degree(s)	4000 K	>80	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-	90 degree(s)	4000 K	>80	911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	All-in, Multi Lumen	120 degree(s)	3000 K	>80
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-	90 degree(s)	4000 K	>80	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	4000 K	>90						
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	All-in, Multi Lumen	90 degree(s)	4000 K	>80						
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	-	90 degree(s)	4000 K	>80	911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80

Light Technical (2/2)

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	132 lm/W	4,300 lm	Beam angle 90°	911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	141 lm/W	2,900 lm	Beam angle 90°
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	126 lm/W	4,000 lm	Beam angle 90°	911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	139 lm/W	4,000 lm	Beam angle 90°
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	138 lm/W	2,900 lm	Beam angle 90°	910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	110 lm/W	3,600 lm	Beam angle 90°
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	138 lm/W	2,900 lm	Beam angle 90°	911401802887	RC132V G6 36S/840 WIA W30L120 OC	138 lm/W	3,600 lm	Beam angle 90°
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	138 lm/W	4,000 lm	Beam angle 90°	911401890485	RC132V G6 36S/840 PSU W30L120 NOC	138 lm/W	3,600 lm	Beam angle 120°
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	138 lm/W	4,000 lm	Beam angle 90°	911401890785	RC132V G6 36S/840 PSU W30L120 OC	138 lm/W	3,600 lm	Beam angle 90°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
911401891085	RC132V G6 36S/840 PSD W30L120 OC	138 lm/W	3,600 lm	Beam angle 90°
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	111 lm/W	5,000 lm	Beam angle 120°
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	107 lm/W	4,800 lm	Beam angle 90°
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	107 lm/W	4,800 lm	Beam angle 90°
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	138 lm/W	3,600 lm	Beam angle 120°
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	110 lm/W	3,600 lm	Beam angle 90°
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	110 lm/W	3,600 lm	Beam angle 90°
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	110 lm/W	3,600 lm	Beam angle 90°
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	160 lm/W	3,600 lm	Beam angle 120°
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	160 lm/W	3,600 lm	Beam angle 90°
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
911401800387	RC132V G6 50S/840 PSD W60L60 OC	132 lm/W	5,000 lm	Beam angle 90°
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	138 lm/W	3,600 lm	Beam angle 90°
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	138 lm/W	3,600 lm	Beam angle 90°
911401802187	RC132V G6 34S/830 WIA W60L60 OC	131 lm/W	3,400 lm	Beam angle 90°
911401802287	RC132V G6 36S/840 WIA W60L60 OC	138 lm/W	3,600 lm	Beam angle 90°

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
911401802487	RC132V G6 43S/840 WIA W60L60 OC	139 lm/W	4,300 lm	Beam angle 90°
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	139 lm/W	4,300 lm	Beam angle 90°
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	139 lm/W	4,300 lm	Beam angle 120°
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	132 lm/W	5,000 lm	Beam angle 90°
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	131 lm/W	3,400 lm	Beam angle 120°
911401807687	RC132V G6 34S/830 PSU W60L60 OC	131 lm/W	3,400 lm	Beam angle 90°
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	132 lm/W	5,000 lm	Beam angle 90°
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	138 lm/W	3,600 lm	Beam angle 120°
911401890585	RC132V G6 36S/840 PSU W60L60 OC	138 lm/W	3,600 lm	Beam angle 90°
911401890885	RC132V G6 36S/840 PSD W60L60 OC	138 lm/W	3,600 lm	Beam angle 90°
910505102804	RC133V G6 36S/840 PSED W62L62 OC	127 lm/W	3,600 lm	Beam angle 90°
911401802687	RC133V G6 36S/840 WIA W62L62 OC	138 lm/W	3,600 lm	Beam angle 90°
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	138 lm/W	3,600 lm	Beam angle 120°
911401890685	RC133V G6 36S/840 PSU W62L62 OC	138 lm/W	3,600 lm	Beam angle 90°
911401890985	RC133V G6 36S/840 PSD W62L62 OC	138 lm/W	3,600 lm	Beam angle 90°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type
		Luminous Flux	Luminous Flux	Luminous Flux				Luminous Flux	Luminous Flux	Luminous Flux	
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	119 lm/W	3,100 lm		Beam angle 90°	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	138 lm/W	4,000 lm		Beam angle 90°
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	141 lm/W	3,100 lm		Beam angle 90°	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	138 lm/W	4,000 lm		Beam angle 90°
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	132 lm/W	4,300 lm		Beam angle 90°	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	138 lm/W	4,000 lm		Beam angle 90°
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	141 lm/W	2,900 lm		Beam angle 90°	911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	141 lm/W	2,900 lm		Beam angle 120°
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	141 lm/W	2,900 lm		Beam angle 90°	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	139 lm/W	4,000 lm		Beam angle 90°
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	138 lm/W	2,900 lm		Beam angle 90°	911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	141 lm/W	2,900 lm		Beam angle 90°
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	138 lm/W	2,900 lm		Beam angle 90°	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	141 lm/W	2,900 lm		Beam angle 90°

Operating and Electrical

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switchi		Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	220 to 240 V	50 or 60 Hz	32 W	No		911401890485	RC132V G6 36S/840 PSU W30L120 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	220 to 240 V	50 or 60 Hz	32 W	No		911401890785	RC132V G6 36S/840 PSU W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	220 to 240 V	50 or 60 Hz	32 W	No		911401891085	RC132V G6 36S/840 PSD W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	220 to 240 V	50 or 60 Hz	32 W	No		911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	220 to 240 V	50 or 60 Hz	32 W	No		911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	220 to 240 V	50 or 60 Hz	32 W	No		911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	220 to 240 V	50 or 60 Hz	26 W	Not applicable	
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	220 to 240 V	50 or 60 Hz	27 W	No	
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	220 to 240 V	50 or 60 Hz	27 W	No		910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	220 to 240 V	50 or 60 Hz	27 W	No	
911401802887	RC132V G6 36S/840 WIA W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable		910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	220 to 240 V	50 or 60 Hz	27 W	No	

CoreLine Panel gen6

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching			Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching		
					Not applicable	applicable	applicable						Not applicable	applicable	applicable
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable	applicable	910505102804	RC133V G6 36S/840 PSED W62L62 OC	220 to 240 V	50 or 60 Hz	27 W	Not applicable	applicable	No	
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable	applicable	911401802687	RC133V G6 36S/840 WIA W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	applicable	
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	applicable	911401890385	RC133V G6 36S/840 PSU W62L62 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	applicable	
911401800387	RC132V G6 50S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable	applicable	911401890685	RC133V G6 36S/840 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	applicable	
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401890985	RC133V G6 36S/840 PSD W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	applicable	
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable	applicable	applicable	
911401802187	RC132V G6 34S/830 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401802287	RC132V G6 36S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	220-240 V	50 to 60 Hz	32 W	Not applicable	applicable	No	
911401802487	RC132V G6 43S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	220 to 240 V	50 or 60 Hz	32 W	Not applicable	applicable	No	
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	38 W	Not applicable	applicable	910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	220 to 240 V	50 or 60 Hz	32 W	Not applicable	applicable	No	
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	applicable	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	220 to 240 V	50 or 60 Hz	32 W	Not applicable	applicable	No	
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	220 to 240 V	50 or 60 Hz	32 W	Not applicable	applicable	No	
911401807687	RC132V G6 34S/830 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	220 to 240 V	50 or 60 Hz	32 W	Not applicable	applicable	No	
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	220 to 240 V	50 or 60 Hz	38 W	Not applicable	applicable	911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401890585	RC132V G6 36S/840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	
911401890885	RC132V G6 36S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	applicable	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	applicable	applicable	

Controls and Dimming

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level	Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes	Interact SNS210 sensor	Not applicable	910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	Not applicable
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes	Interact SNS210 sensor	Not applicable	910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	Not applicable
					910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes	-	10%

CoreLine Panel gen6

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes	-	10%
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes	-	1%
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes	-	1%
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	-	Not applicable
911401802887	RC132V G6 36S/840 WIA W30L120 OC	Yes	-	1%
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	No	-	Not applicable
911401890785	RC132V G6 36S/840 PSU W30L120 OC	No	-	Not applicable
911401891085	RC132V G6 36S/840 PSD W30L120 OC	Yes	-	1%
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	Not applicable
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	Not applicable
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes	-	1%
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	Not applicable
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	-	Not applicable
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes	-	10%
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes	-	10%
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	No	-	Not applicable
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	Not applicable
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	Yes	-	1%
911401800387	RC132V G6 50S/840 PSD W60L60 OC	Yes	-	1%
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	Not applicable
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	Not applicable
911401802187	RC132V G6 34S/830 WIA W60L60 OC	Yes	-	1%
911401802287	RC132V G6 36S/840 WIA W60L60 OC	Yes	-	1%
911401802487	RC132V G6 43S/840 WIA W60L60 OC	Yes	-	1%
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	Not applicable

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	No	-	Not applicable
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	Not applicable
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	Yes	-	1%
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	No	-	Not applicable
911401807687	RC132V G6 34S/830 PSU W60L60 OC	No	-	Not applicable
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	No	-	Not applicable
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	No	-	Not applicable
911401890585	RC132V G6 36S/840 PSU W60L60 OC	No	-	Not applicable
911401890885	RC132V G6 36S/840 PSD W60L60 OC	Yes	-	1%
910505102804	RC133V G6 36S/840 PSED W62L62 OC	Yes	-	10%
911401802687	RC133V G6 36S/840 WIA W62L62 OC	Yes	-	1%
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	No	-	Not applicable
911401890685	RC133V G6 36S/840 PSU W62L62 OC	No	-	Not applicable
911401890985	RC133V G6 36S/840 PSD W62L62 OC	Yes	-	1%
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes	-	1%
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	No	-	Not applicable
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	Yes	Interact SNS210 sensor	Not applicable
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	No	-	Not applicable
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	Yes	-	1%
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	Not applicable
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	Not applicable
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes	-	10%
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	Yes	-	10%
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes	-	10%
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	-	Not applicable

CoreLine Panel gen6

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes	-	1%
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	Not applicable

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes	-	1%

Mechanical and Housing

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	White	IK02	IP20
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	White	IK02	IP20
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	White	IK02	IP20/44
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	White	IK02	IP20/44
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	White	IK02	IP20/44
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	White	IK02	IP20/44
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	White	IK02	IP20/44
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	White	IK02	IP20/44
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	White	IK03	IP20/44
911401802887	RC132V G6 36S/840 WIA W30L120 OC	White	IK02	IP20/44
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	White	IK03	IP20/44
911401890785	RC132V G6 36S/840 PSU W30L120 OC	White	IK02	IP20/44
911401891085	RC132V G6 36S/840 PSD W30L120 OC	White	IK02	IP20/44
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	White	IK03	IP65
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	White	IK03	IP65
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	White	IK03	IP65
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	White	IK03	IP20/65
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	White	IK03	IP20/44
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	White	IK03	IP20/44
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	White	IK03	IP20/44

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	White	IK03	IP20/44
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	White	IK02	IP20/44
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	White	IK02	IP20/44
911401800387	RC132V G6 50S/840 PSD W60L60 OC	White	IK02	IP20/44
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	White	IK02	IP20/40
911401802187	RC132V G6 34S/830 WIA W60L60 OC	White	IK02	IP20/44
911401802287	RC132V G6 36S/840 WIA W60L60 OC	White	IK02	IP20/44
911401802487	RC132V G6 43S/840 WIA W60L60 OC	White	IK02	IP20/44
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	White	IK03	IP20/40
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	White	IK02	IP20/44
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	White	IK03	IP20/44
911401807687	RC132V G6 34S/830 PSU W60L60 OC	White	IK02	IP20/44
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	White	IK02	IP20/40
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	White	IK03	IP20/44
911401890585	RC132V G6 36S/840 PSU W60L60 OC	White	IK02	IP20/44
911401890885	RC132V G6 36S/840 PSD W60L60 OC	White	IK02	IP20/44
910505102804	RC133V G6 36S/840 PSED W62L62 OC	White	IK03	IP20/40

CoreLine Panel gen6

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
911401802687	RC133V G6 36S/840 WIA W62L62 OC	White	IK02	IP20/40
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	White	IK03	IP20/40
911401890685	RC133V G6 36S/840 PSU W62L62 OC	White	IK02	IP20/40
911401890985	RC133V G6 36S/840 PSD W62L62 OC	White	IK02	IP20/40
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	White	IK02	IP20/44
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	White	IK02	IP20/40
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	Steel	IK02	IP20
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	White	IK02	IP20/40
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	White	IK02	IP20/40

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	White	IK02	IP20/44
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	White	IK02	IP20/44
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	White	IK02	IP20/44
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	White	IK02	IP20/44
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	White	IK02	IP20/44
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	White	IK03	IP20/44
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	White	IK02	IP20/44
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	White	IK02	IP20/44
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	White	IK02	IP20/44

Emergency Operation (1/2)

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type c emerg lightin batter	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	No	-	-	-	911401890485	RC132V G6 36S/840 PSU W30L120 NOC	No	-	-	-
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	No	-	-	-	911401890785	RC132V G6 36S/840 PSU W30L120 OC	No	-	-	-
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	-	-	911401891085	RC132V G6 36S/840 PSD W30L120 OC	No	-	-	-
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	-	-	911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	-	-
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	No	-	-	-	911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	-	-
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	No	-	-	-	911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	No	-	-	-
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	No	-	-	-	911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	-	-
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	No	-	-	-	910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium	910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	No	Emergency lighting 3 hours duration	250 lm	Lithium
911401802887	RC132V G6 36S/840 WIA W30L120 OC	No	-	-	-				Emergency lighting 3 hours duration		

CoreLine Panel gen6

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type c emerg lightin batter	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
			basic version			911401890885	RC132V G6 36S/840 PSD W60L60 OC	No	-	-	-
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium	910505102804	RC133V G6 36S/840 PSED W62L62 OC	Yes	DC operated central emergency lighting	360 lm	-
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	No	-	-	-	911401802687	RC133V G6 36S/840 WIA W62L62 OC	No	-	-	-
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	-	-	911401890385	RC133V G6 36S/840 PSU W62L62 NOC	No	-	-	-
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	No	-	-	-	911401890685	RC133V G6 36S/840 PSU W62L62 OC	No	-	-	-
911401800387	RC132V G6 50S/840 PSD W60L60 OC	No	-	-	-	911401890985	RC133V G6 36S/840 PSD W62L62 OC	No	-	-	-
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	-	-	911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	No	-	-	-
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	-	-	911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	No	-	-	-
911401802187	RC132V G6 34S/830 WIA W60L60 OC	No	-	-	-	910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	No	-	-	-
911401802287	RC132V G6 36S/840 WIA W60L60 OC	No	-	-	-	911401801387	RC133V G6 29_36_43S/ 830_40 PSU W62L62 OC	No	-	-	-
911401802487	RC132V G6 43S/840 WIA W60L60 OC	No	-	-	-	911401801487	RC133V G6 29_36_43S/ 830_40 PSD W62L62 OC	No	-	-	-
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	-	-	910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	-	-
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	No	-	-	-	910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	-	-
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	-	-	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	No	-	-	-
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	No	-	-	-	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	No	-	-	-
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	No	-	-	-	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	No	-	-	-
911401807687	RC132V G6 34S/830 PSU W60L60 OC	No	-	-	-	911401801287	RC132V G6 29_36_43S/ 830_40 PSU W60L60NOC	No	-	-	-
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	No	-	-	-	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	No	-	-	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	No	-	-	-	911401891185	RC132V G6 29_36_43S/ 830_40 PSU W60L60 OC	No	-	-	-
911401890585	RC132V G6 36S/840 PSU W60L60 OC	No	-	-	-	911401891285	RC132V G6 29_36_43S/ 830_40 PSD W60L60 OC	No	-	-	-

Emergency Operation (2/2)

CoreLine Panel gen6

Order Code	Full Product Name	Rated duration of the emergency lighting (when fully charged)
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	-
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	-
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	-
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	-
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	3 hour(s)
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	3 hour(s)
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	3 hour(s)
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	3 hour(s)
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-
911401802287	RC132V G6 36S/840 WIA W60L60 OC	-
911401802487	RC132V G6 43S/840 WIA W60L60 OC	-

Order Code	Full Product Name	Rated duration of the emergency lighting (when fully charged)
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-
911401807687	RC132V G6 34S/830 PSU W60L60 OC	-
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-
910505102804	RC133V G6 36S/840 PSED W62L62 OC	-
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	-
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	-
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCE	-
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	-
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-

Approval and Application

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	0 °C to 35 °C	For mounting on normally flammable surfaces	Temperature 850 °C, duration 30 s
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	0 °C to 35 °C	For mounting on normally flammable surfaces	Temperature 850 °C, duration 30 s
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	0 °C to 35 °C	For mounting on normally flammable surfaces	Temperature 850 °C, duration 30 s
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	0 °C to 35 °C	For mounting on normally flammable surfaces	Temperature 850 °C, duration 30 s
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401802287	RC132V G6 36S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401802487	RC132V G6 43S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401807687	RC132V G6 34S/830 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s					Temperature 650 °C, duration 30 s
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102804	RC133V G6 36S/840 PSED W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s					Temperature 650 °C, duration 30 s
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s				flammable surfaces	duration 30 s

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-10 to +35 °C	For mounting on normally	Temperature 650 °C,


Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
			flammable surfaces	duration 30 s

Initial Performance (IEC Compliant)


Order Code	Full Product Name	Initial chromaticity
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	(0.38, 0.38) SDCM ≤3
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	(0.38, 0.38) SDCM ≤3
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	(0.38, 0.38) SDCM ≤3
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	(0.38, 0.38) SDCM ≤3
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	(0.38, 0.38) SDCM ≤3
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	(0.38, 0.38) SDCM ≤3
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	(0.38, 0.38) SDCM ≤3
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	(0.38, 0.38) SDCM ≤3
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	(0.38, 0.38) SDCM ≤3
911401802887	RC132V G6 36S/840 WIA W30L120 OC	(0.38, 0.38) SDCM ≤3
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	(0.38, 0.38) SDCM ≤3
911401890785	RC132V G6 36S/840 PSU W30L120 OC	(0.38, 0.38) SDCM ≤3
911401891085	RC132V G6 36S/840 PSD W30L120 OC	(0.38, 0.38) SDCM ≤3
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	(0.38, 0.38) SDCM ≤3
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	(0.38, 0.38) SDCM ≤3
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800387	RC132V G6 50S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	(0.38, 0.38) SDCM ≤3
911401802187	RC132V G6 34S/830 WIA W60L60 OC	(0.43, 0.40) SDCM ≤3
911401802287	RC132V G6 36S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401802487	RC132V G6 43S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3

Order Code	Full Product Name	Initial chromaticity
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	(0.38, 0.38) SDCM ≤3
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	(0.43, 0.40) SDCM ≤3
911401807687	RC132V G6 34S/830 PSU W60L60 OC	(0.43, 0.40) SDCM ≤3
911401818687	RC132V G6 50S/840 PSU W60L60 OC BN CL	(0.38, 0.38) SDCM ≤3
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401890585	RC132V G6 36S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401890885	RC132V G6 36S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
910505102804	RC133V G6 36S/840 PSED W62L62 OC	(0.38, 0.38) SDCM ≤3
911401802687	RC133V G6 36S/840 WIA W62L62 OC	(0.38, 0.38) SDCM ≤3
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	(0.38, 0.38) SDCM ≤3
911401890685	RC133V G6 36S/840 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
911401890985	RC133V G6 36S/840 PSD W62L62 OC	(0.38, 0.38) SDCM ≤3
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	(0.38, 0.38) SDCM ≤3
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	(0.38, 0.38) SDCM ≤3
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	(0.38, 0.38) SDCM ≤3
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	(0.38, 0.38) SDCM ≤3
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	(0.38, 0.38) SDCM ≤3
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	(0.38, 0.38) SDCM ≤3
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCE	(0.38, 0.38) SDCM ≤3
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	(0.38, 0.38) SDCM ≤3
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	(0.38, 0.38) SDCM ≤3
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	(0.38, 0.38) SDCM ≤3
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3


Polar Wide Diagrams




Polar Normal (separate) - RC132VI -
910505102804




Polar Normal (separate) - RC132VI -
910505102803




Polar Normal (separate) - RC132VI -
910505102818




Polar Normal (separate) - RC132VI -
910505102817




Polar Normal (separate) - RC132VI -
910505102829




Polar Normal (separate) - RC132VI -
910505102830



Polar Normal (separate) - RC132VI -
910505102825




Polar Normal (separate) - RC132VI -
910505102821




Polar Normal (separate) - RC132VI -
910505102822


Polar Wide Diagrams




Polar Normal (separate) - RC132VI -
910505102824




Polar Normal (separate) - RC132VI -
910505102819




Polar Normal (separate) - RC132VI -
910505102826




Polar Normal (separate) - RC132VI -
910505102802



Polar Normal (separate) - RC132VI -
910505102816



Polar Normal (separate) - RC132VI -
910505102828



Polar Normal (separate) - RC132VI -
910505102823

CoreLine Panel gen6

