# Recessed

# **Day-Brite**

# FluxPanel LED gen 2

2 x 4 at up to 8000 lumens



Day-Brite/CFI FluxPanel LED gen 2 recessed is a highly versatile luminaire designed to provide smooth lighting gradient on the lens surface and ease of installation. Available for use in recessed, suspended, and surface mount orientation, FluxPanel gen 2 is ideal for general lighting applications such as open office, schools, healthcare, clean rooms, and retail.

Project:		
Location:		
Cat.No:		
Туре:		
Qty:		
Notes:		

Example: 2FPZ43L840-4-DS-UNV-DIM-EM10

#### Ordering guide

Standard configurations available with all choices, unless otherwise noted. Base configurations selections indicated by blue.

Family Lumens (nominal delivered)	Color (CRI / CCT)	Length	Diffuser	Voltage	Driver	Options	2,3,15
2FPZ	_	4 -	_	_	-		
2FPZ 2ft FluxPanel gen 2  28  42B 4200Im 48B 4800Im 54B 5400Im 30L 3000Im 38L 3800Im 43L 4300Im 48L 4800Im 54L 5400Im 60L 6000Im 74L 7400Im 80L 8000Im 0ther lumen packages may be ordered in increments of 100 lumens from 1500Im to 8000Im	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K 930° 90 CRI 3000K 935° 90 CRI 3500K 940° 90 CRI 4000K	,	DS Diffuse (smooth) ADS Acrylic Diffuse (smooth) A12 Diffuse (Prismatic)	UNV Universal Voltage, 120-277V 1203 120V 277 277V 347 347V	DIM¹ 0-10V dimming SDIM Step dimming to 30% input power	F2	5 leads include hot, neutral, ground, Dim + / Dim - 3/8" single flex, 18ga. 6' for dimmable & EM luminaires; 6 leads include 2 hot, neutral, ground, Dim + / Dim - Fusing, fast blow Quick driver disconnect Chicago Plenum rated Meets the requirements of the Buy American Act of 1933 (BAA)  11,12 UL 924 listed sensor bypass relay, factory installed between driver & sensor Bodine 10W battery pack Bodine 6W battery pack M 1.4.7.9.10 Remote Interact wireless sensor. with integral daylight & occupancy sensing, advanced grouping with dwell time Interact wireless sensor. with integral daylight & occupancy sensing, advanced grouping with dwell time

- 1 Integral control options dimmable to 1% via wireless wall switch. Non-controls options are 0-10V dimmable to 1% for Standard configurations and 5% for Base configurations. All options only available with Standard configurations. Base configurations available with flex as factory installed options. Specify DIM driver option only. Not available with 347V option.

FluxPanel-LED-2x4-gen2-en

- 90CRI is qualified as Engineered-to-Order (ETO) ready. Lead times and minimum order quantities may vary, please consult factory. Only requires NIS request. Not available with surface or suspended accessories.
- Flex with dimming not available with Interact sensors
- Emergency and Interact options not clean room certified, nor NSF listed.
- Must order IRT9015 Interact commissioning remote with each system order.
   Must be installed in conjunction with a UL1008 device.
- 12 Must be ordered with an integral controls option.
  13 Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds
- administered by the Department of Transportation or other federal agencies 14 Consult Signify to confirm whether specific accessories are BAA-compliant.
- 15 Third party sensors also available, please enquire about options for Lutron Athena, Vive, or others.
- 16 Specify ADS diffuser for integrated sensor or EM test switch.













# Accessories<sup>14</sup> (order separately)

- FMA24: 2'x4' "F" mounting frame for NEMA "F" mounting
- FSK24: 2'x4' surface mount field installation kit (factory welded seams)

and occupancy

- FSF24: 2'x4' surface mount field assembly kit (field assembled)
- FPZCH48-1D-SC-UNV: adjustable cable hanger kit with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered).
- FPZCH48-1D-SC-347: adjustable cable hanger kit with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered).
- IRT9015: handheld remote for grouping and configuration (at least one remote required for any SWZCS installation).

# Recessed 2x4 at up to 8000 lumens

## **Application**

- Base configurations are 1 9/16". Standard configurations are 3 " Dimensions stated for overall depth, including driver box.
- Even distribution of light on the lens provides exceptionally low glare gradient minimizing distractions at the ceiling plane.
- General light distribution creates uniform horizontal and vertical illuminance on the work plane and limits scalloping on the walls.
- Excellent consistency of correlated color temperature (CCT) per ANSI C78.377.
- CRI 80 minimum color rendering with balanced spectrum.
- Designed for use with standard Grid (NEMA "G") or Narrow Grid (NEMA "NFG") ceiling T-bars.
   Drywall or plaster application require use with the FMA14FP "F" mounting frame accessory (sold and shipped separately).
- Accessory field install kits available for surface (FSF14) and suspended (FPZCH48) mounting.

#### **Enclosure**

- Diffuser provides visual comfort and high efficiency.
- Flat opal lens is easy to clean and provides a uniform aesthetic on the ceiling plane.
- Tight enclosure assembly impedes ingress of dust and insects.

## **Energy data**

Luminaire	Catalog	Input Power	Efficacy	DLC
	2FPZ15L840	12	122	Standard
	2FPZ30L840	23	132	Premium
	2FPZ38L840	29	132	Premium
	2FPZ43L840	30	132	Premium
2x4 Standard	2FPZ48L840	37	132	Premium
o canaara	2FPZ54L840	42	130	Premium
	2FPZ60L840	47	131	Premium
	2FPZ74L840	58	127	Premium
	2FPZ80L840	65	125	Premium
2x4 Base	2FPZ42B840	40	110	Standard

#### **Electrical**

- Up to 135 lm/W efficacy.
- High efficiency Advance driver featuring high power factor (>0.90), 120-277V 60/50Hz, and less than 15% THD.
- Minimum start temperature -20°C (-4°F).
- Standard configurations are 0-10V dimming to 1%. Base configurations are to 5%.
- To predict lumen output in emergency mode, multiply emergency pack wattage by luminaire efficacy, then by 1.10. Typical lumen output is 1200lm for BSL10LST, and 850lm for BSL6LST.
- Electromagnetic interference (EMI) compliant to FCC Title 47 Part 15 class A.
- Flicker and stroboscopic effect compliant to NEMA 77-2017.
- TM-21 predicted L70 lumen maintenance up to 90,000 hours per LED manufacturer LM-80 report.
- cULus (Base) or cETLus (Standard) listed to UL and CSA standards, suitable for damp locations.
- Rated for NSF/ANSI 2 Light fixture for Non Food Zone. Not intended for use in wet location nor hose down applications.
- Rated for clean room use meets ISO14644-1 Class 5-9 (equivalent to Federal Standard No. 209E Class 100-100,000)
- · Base and Standard configurations are IC rated.
- FluxPanel luminaires are Designlights
   Consortium® Standard qualified. Please see the
   DLC QPL list for exact catalog numbers
   (www.designlights.org/QPL).


#### Construction/Finish

- · Die formed galvanized steel housing.
- Extruded aluminum frame post painted with gloss white enamel finish. Corners are precision welded for seamless aesthetic.
- Emergency options available with factory installed battery pack.
- Die formed driver box with standard access plate for ease of wiring, provides tool-free access to driver(s) from above.
- Back lit LED arrays with optics provide highly efficient and unpixilated transfer of light to the diffuser.
- Integral clips accommodate definitive attachment to T-bar grid for recessed applications.
- Die formed surface box accessory kit post painted gloss white enamel.

#### **General Notes**

- · All options factory installed.
- · All accessories are field installed.
- Declare label certified, ID SGY-0020 (View full Declare label)
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.
- Five year limited luminaire warranty includes LED boards and driver. Visit www.signify.com/ warranties for complete warranty information.


## **Dimensions**



**Note**: Base configurations are 1-9/16" deep. Standard configurations are 3" deep.

Emergency driver box shown is 20.5" (521mm) long.

Standard non-EM driver box is 10.5" (267mm) long.

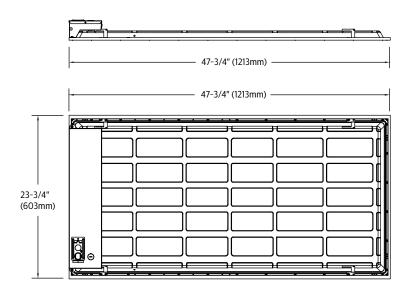


# Recessed 2x4 at up to 8000 lumens

Functionalities overview	The three tiers of Interact					
	Stores As					
	Standalone	Gateway	Gateway + IoT			
Dimming, grouping, and zoning	<b>✓</b>	<b>✓</b>	<b>~</b>			
Bluetooth and ZigBee enabled	<b>✓</b>	<b>✓</b>	<b>~</b>			
Motion sensing and daylight harvesting	<b>✓</b>	<b>✓</b>	<b>~</b>			
Integration with 0-10V and phase dimming fixtures	<b>✓</b>	<b>✓</b>	<b>~</b>			
Code compliance	<b>✓</b>	<b>✓</b>	<b>~</b>			
Granular dimming and dwell time	<b>✓</b>	<b>✓</b>	<b>~</b>			
Correlated color temperature (CCT) tuning by switch	<b>✓</b>	<b>✓</b>	<b>~</b>			
Support for sensor-based Tunable White luminaires	<b>✓</b>	<b>✓</b>	<b>~</b>			
Energy reporting and monitoring		<b>✓</b>	<b>~</b>			
Scheduling		<b>✓</b>	<b>~</b>			
Demand response		<b>✓</b>	<b>~</b>			
BMS integration (BACnet)			<b>~</b>			
Floor plan visualization			<b>~</b>			
IoT sensors for wellness			<b>~</b>			
IoT Apps for productivity			<b>~</b>			

## Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
<ul> <li>luminaires with integrated sensors</li> </ul>	150
• smart TLEDS	150
Total number of ZGP devices (sensors and switches)	50
· sensors	30
• switches	50
· zones and groups	64
Group level	
Recommended number of lights	40 (recommended 25)
Number of ZGP devices	5
Number of scenes	16

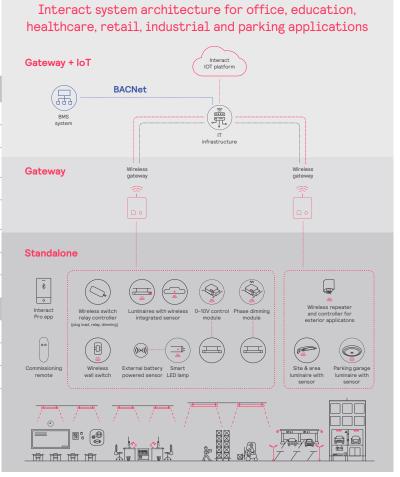

# Recessed 2x4 at up to 8000 lumens

## Wireless controls options

#### Interact - a scalable sensor

- SWZCS standalone mode or in a cloud connected mode if a compatible gateway is used.
- The sensor works in the Foundation mode (similar to SpaceWise) when configured without a gateway or in an Interact Pro Advanced or Enterprise mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity.
   The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote onsite to identify and group devices together.
- · Compatible with:
- UID8465 wireless dimmer switch
- SWS200 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- Battery powered IP65 presence sensor OCC sensor IA CM IP65 WH
- Battery powered IP65 presence & daylight sensor OCC-DL sensor IA CM IP65 WH
- For more information on Interact Pro visit: www.interact-lighting.com/interactproscalablesystem

## Radio only sensor (RADIO)

- Integral RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact Pro includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity.
   The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with UID8451/10 wireless dimmer switch, SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact Pro visit: www.interact-lighting.com/interactproscalablesystem

### SpaceWise DT (SWZDT)

- Standalone daylight and occupancy sensing with advanced grouping, wireless mesh networking and dwell time.
- Commissioning via compatible Android phone and Philips Field App
- Dimming via compatible Zigbee wireless wall switch only (see link below for details)
- Register for the commissioning app at http://registration.componentcloud.philips.com/ appregistration/
- · Integral sensing options may not be combined
- For more information including recommended switches, refer to the following: -

**SWZDT** - www.usa.lighting.philips.com/systems/lighting-systems/spacewise

### **Emergency Options (ER100)**

- Power Sensing (Factory default) Recommended UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output
- Power Interruption Detection (Field option) Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output

#### 3rd party sensors:

 Third party sensors available, please enquire about options for Lutron Athena, Vive, or others.


# Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

# Recessed 2x4 at up to 8000 lumens

## 2FPZ43L835-4-DS-UNV-DIM

Luminaire Lumens	4317
Luminaire Efficacy Rating (LER)	132
Total Luminaire Watts	32.6
Spacing Criterion (0-180)	1.26



Cande	Candela Distribution								
	0	22.5	45	67.5	90	Lumens			
0	1488	1488	1488	1488	1488				
5	1474	1483	1489	1483	1474	141			
15	1425	1433	1438	1433	1425	404			
25	1329	1333	1333	1333	1329	614			
35	1189	1189	1185	1189	1189	743			
45	1008	1005	999	1005	1008	775			
55	794	790	783	790	794	705			
65	520	536	533	536	520	528			
75	293	290	288	290	293	307			
85	85	84	89	84	85	98			
90	4	15	34	15	4				


Zonal Lumen Summary							
Zone	Lumens	%Fixture	%Lamp				
0-30	1159	26.8%	26.8%				
0-40	1902	44.1%	44.1%				
0-60	3381	78.3%	78.3%				
0-90	4314	99.9%	99.9%				
0-180	4317	100.0%	100.0%				

Avg. Luminance (cd/m²)							
	0	90	180				
0	2441	2441	2441				
5	2427	2451	2427				
15	2420	2441	2420				
25	2405	2413	2405				
35	2380	2372	2380				
45	2337	2318	2337				
55	2271	2240	2271				
65	2019	2067	2019				
75	1857	1822	1857				
85	1596	1681	1596				

Со	Coefficients of Utilization %											
Рс			80			70			50		0	
Pw		70	50	30	10	70	50	30	50	30	10	0
	0	119	119	119	119	116	116	116	111	111	111	100
	1	109	104	99	95	106	101	97	97	94	91	83
	2	99	90	83	77	96	88	82	85	79	75	69
	3	90	79	71	64	87	77	70	74	68	62	58
~	4	82	70	61	54	80	69	60	66	59	53	49
RCR.	5	75	62	53	47	73	61	53	59	52	46	43
	6	70	56	47	41	68	55	47	53	46	40	37
	7	65	51	42	36	63	50	42	49	41	35	33
	8	60	46	38	32	58	46	38	44	37	32	29
	9	56	43	34	29	55	42	34	41	34	28	26
	10	53	39	31	26	51	39	31	38	31	26	24

#### 2FPZ43L840-4-DS-UNV-DIM

Luminaire Lumens	4164
Luminaire Efficacy Rating (LER)	128
Total Luminaire Watts	32.5
Spacing Criterion (0-180)	1.26



© 2025 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included

Cande	andela Distribution						
	0	22.5	45	67.5	90	Lumens	
0	1436	1436	1436	1436	1436		
5	1421	1432	1435	1432	1421	136	
15	1374	1383	1386	1383	1374	390	
25	1281	1287	1288	1287	1281	593	
35	1145	1148	1147	1148	1145	718	
45	971	971	969	971	971	749	
55	765	762	759	762	765	681	
65	501	498	516	498	501	506	
75	284	279	279	279	284	297	
85	83	80	84	80	83	94	
90	7	11	30	11	7		

Zonal Lun			
Zone	Lumens	%Fixture	%Lamp
0-30	1118	26.9%	26.9%
0-40	1836	44.1%	44.1%
0-60	3266	78.4%	78.4%
0-90	4162	100.0%	100.0%
0-180	4164	100.0%	100.0%

Avg. L	.umina	nce (c	d/m²)
	0	90	180
0	2355	2355	2355
5	2340	2363	2340
15	2333	2354	2333
25	2318	2332	2318
35	2294	2297	2294
45	2253	2247	2253
55	2189	2170	2189
65	1944	2001	1944
75	1797	1767	1797
85	1564	1585	1564

Со	Coefficients of Utilization %											
Pc		80			70			50			0	
Pw		70	50	30	10	70	50	30	50	30	10	0
	0	119	119	119	119	116	116	116	111	111	111	100
	1	109	104	99	95	106	101	97	97	94	91	83
	2	99	90	83	77	96	88	82	85	79	75	69
	3	90	79	71	64	87	77	70	74	68	62	58
	4	82	70	61	54	80	69	60	66	59	53	49
RCR	5	75	62	53	47	73	61	53	59	52	46	43
	6	70	56	47	41	68	55	47	53	46	40	37
	7	65	51	42	36	63	50	42	49	41	35	33
	8	60	46	38	32	58	46	38	44	37	32	29
	9	56	43	34	29	55	42	34	41	34	28	26
	10	53	39	31	26	51	39	31	38	31	26	24

All trademarks are owned by Signify Holding or their respective owners.