

Calculite LED 6" generation 3 features industry leading visual comfort, excellent uniform illumination over time, and patented installation flexibility.

Complete luminaire = Frame + Engine + Trim + Accessories (optional)

Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Frame

example: C6SN

Series	Aperture	Installation	Voltage/Options
6	S	<input type="checkbox"/>	<input type="checkbox"/>
6 6" Non-IC *	S Square	N New Construction R Remodeler	— Universal 120 V/277 V 3 347 V EM Emergency ^{1,2} LC Chicago Plenum ¹
		A Airseal IC	— Universal 120 V/277 V

Engine

example: C6L10865MDUTW

Series	Lumens	CRI	CCT	Beam	Dimming	Voltage	Options
C6L							TW
C6L Calculite LED 6" aperture	10 1000lm 15 1500lm 20 2000lm 25 2500lm	8 80 CRI	65 6500-2700K	M Medium (56°) ³ W Wide (76°)	D Dali	U Universal 120 V/277 V/347 V	TW Tunable White
	15 1500lm 20 2000lm	8 80 CRI	65 6500-2700K	M Medium (56°) ³ W Wide (76°)	P Power over Ethernet ⁴	E Ethernet 48 V DC	TW Tunable White

Trim

example: C6SDLNMCCP

Series	Aperture	Style	Beam ³	Finish	Flange
C6	S				
C6 Calculite LED 6" aperture	S Square	DL Downlight LW Lensed Wall Wash ³	NM Narrow & Medium W Wide — blank	CL Specular clear CC Comfort clear CD Comfort clear diffuse WH White (matte)	— White (matte) P Polished F Flangeless — White (matte) F Flangeless

Beam options

	Med engine	Wide engine
6" reflector	56° (0.8 s.c.)	78° (1.2 s.c.)

Mixing chambers

	Med engine	Wide engine
6" cone	0.8 s.c. (56°)	1.1 s.c. (78°)

Accessories


CA4SFT Mud-in ring for use with flangeless installations (ordered with a flangeless trim)

- Emergency (EM) and Chicago Plenum (LC) options are only available with New construction (N) installations. Not compatible with PoE light engine.
- Emergency (EM) frame comes with emergency battery pack and ceiling mountable test switch. Reflector mounted test switch requires above ceiling access and is only available with the downlight option. For reflector mounted test switch, order emergency frame and add "EM" suffix to reflector (example: C6SDLNMCCEM).
- Medium (M) beam is ideal for lensed wall washing.
- Power over Ethernet (PoE) option compatible with 6SN and 6SR frames only.


C6STW Calculite LED 6" gen 3

Square Tunable White


New Construction (N)

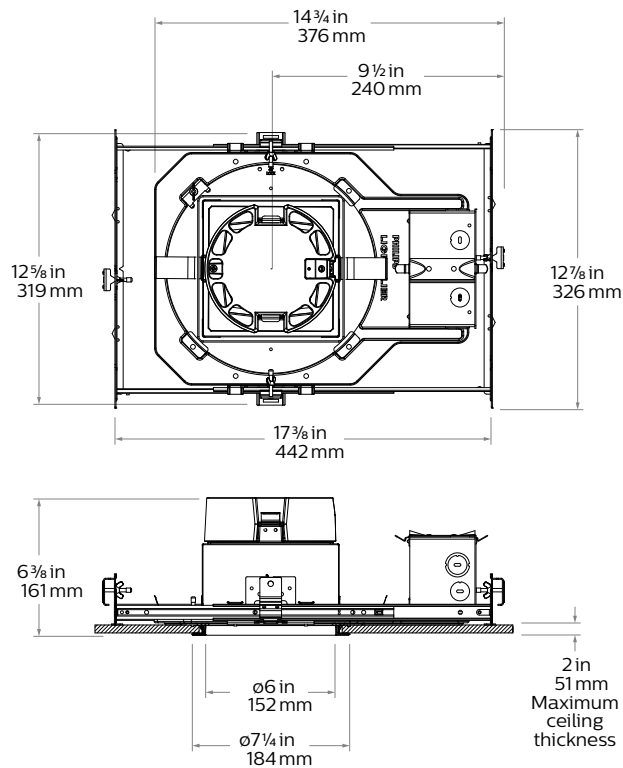


Chicago Plenum (LC)

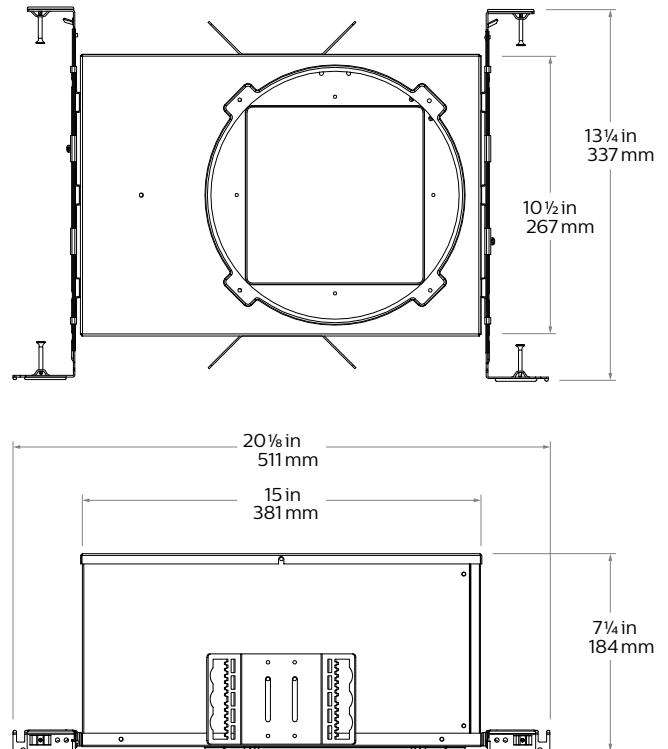

Remodeler (R)

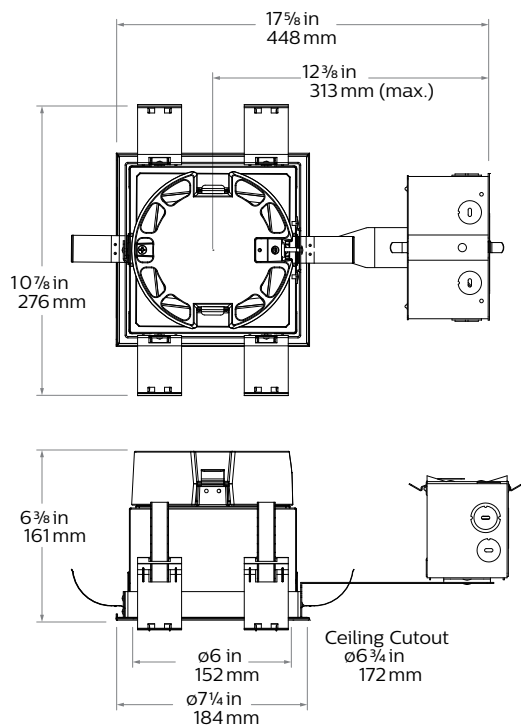

Flangeless mud-in ring (CA6SFT) accessory

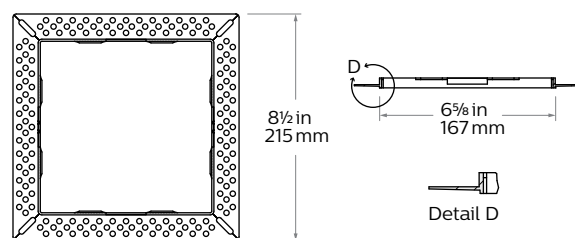

C6STW Calculite LED 6" gen 3

Square Tunable White

Disclaimers/Recommendations

For best performance, we recommend using Lightolier Dynalite products when designing your controls system.

CCT targeting table is for guidance only. Lightolier cannot guarantee color targeting precision, accuracy, or general performance with third party controls.

Lightolier cannot provide post sales configuration or commissioning support when using control systems that are not in the Lightolier product offering. Please contact your controls manufacturer for support.

Lightolier cannot provide guidance on programming dynamic show behaviors (circadian rhythm, daylight mimicry, etc.).

Any configuration, commissioning, or support is solely owned by the sales agent/rep/specifier.

Objective

Provide an application note to reps/agents/ trade channel partners that provides information for integration of Lightolier tunable white luminaires with third party controllers.

All Lightolier tunable white luminaires leave the factory with the following settings:

Cool white CCT: 6500K

Warm white CCT: 2700K

When either channel is at 100% brightness

Warm white = Cool white
lumen output lumen output

Communication protocol:

DALI 2.0 (Device Type 6)

Power over Ethernet 48V

CCT targeting guidance


Target CCT	WW%	CW%
2700K	100	0
3000K	82	18
3500K	66	34
4000K	49	51
5000K	24	76
6500K	0	100

Color information (Dali)

6" 2000lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux (lms)	1927	1856	1863	1937	1848	1790
Power (W)	19.21	18.12	17.62	17.93	17.14	16.84
Efficacy (lm/W)	100.3	102.4	105.7	108.0	107.8	106.3
CCT	2785	3008	3499	3936	4818	6549
CRI	86	87	88	89	88	84
R9	20	26	33	36	33	15
x	0.4501	0.4311	0.3999	0.3794	0.3495	0.3122
y	0.4033	0.393	0.376	0.3649	0.3484	0.3269
Duv	-0.0018	-0.0037	-0.0054	-0.0054	-0.0034	0.0024

Lifetime (TM-21) data

Lumens	Narrow beam	Medium/Wide beam*
500lm	L90 @ 60,000hrs.	L90 @ 60,000hrs.
1000lm		
1500lm		
2000lm	L90 @ 60,000hrs.	L85 @ 60,000hrs.
2500lm		

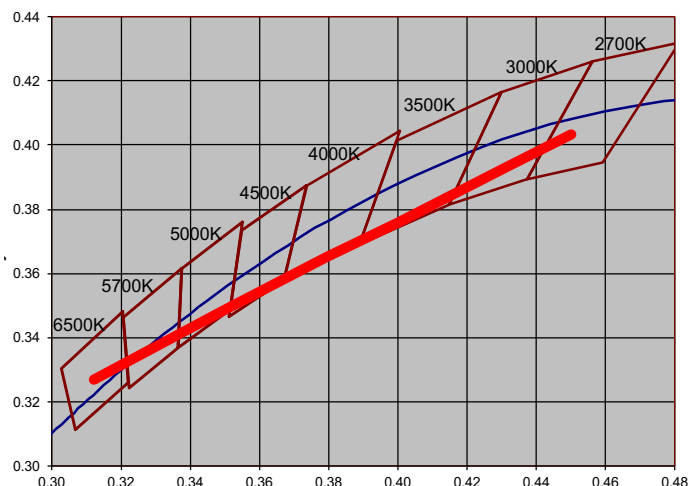

Color information (PoE)

Flux (lm)	1300	1275	1284	1279	1266	1248	1221	1223
Power (W)	11.62	11.55	11.16	11	10.92	10.9	10.98	10.85
Efficacy (lm/W)	111.9	110.4	115.1	116.2	115.9	114.5	111.2	112.7
CCT	2729	2987	3508	4019	4536	5076	5869	6480
CRI	85	86	88	88	87	86	85	83
Color Rendering Index (R9)	16.5	23.1	31	33.9	33	28.6	22.3	14.1
x	0.4564	0.4336	0.3998	0.3762	0.3579	0.3425	0.3245	0.3132
y	0.4084	0.396	0.3773	0.3639	0.3535	0.3446	0.3342	0.3276
Duv	-0.0005	-0.0028	-0.0048	-0.0049	-0.0040	-0.0025	0.0001	0.0023
TM30 Rf	86	86	87	87	86	85	84	84
TM30 Rg	98	100	100	100	100	100	99	98

C6STW Calculite LED 6" gen 3

Square Tunable White

Reflector



Specular clear (CL): Most specular and most efficient finish, delivers maximum photometric performance but can produce a mirror image effect of the interior space.



Comfort clear (CC): Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



Comfort clear diffuse (CD): Slightly diffuse clear finish, that eliminates iridescence and reduces the mirror image effect inherent with specular finishes.



White (WH): (matte) Brightest illuminated aperture and provides the smoothest transition to most ceilings when off (white is only available with a white flange).

Flange



White (-): (matte) Provides the smoothest transition to ceilings when off.



Polished (P): (matches aperture) Produces a continuous look throughout the reflector (aperture matching).



Flangeless (F): (flush-mount) Creates a flush, virtually seamless transition from aperture to ceiling.

Frame-in-kits

New Construction

Galvanized stamped steel for dry or plaster ceilings. Preinstalled telescoping mounting bars from 13" to 24". For 4' distances, use 1/2" EMT, 1-1/2" x 1/2" U or C channel.

Max ceiling thickness is 2".

AirSeal

Black painted steel housing for dry or plaster ceilings. Pre-installed telescoping mounting bars from 13" to 24".

Patented install Mounting frame

With no driver attached, this versatile frame is independent of driver accommodating a wide range of lumen packages, driver types and CCTs, including 120V and 277V inputs.

Close-cut aperture design eliminates possibility of gap between ceiling opening & reflector flange.

Separate wiring compartment for wiring frame to building allows inspection prior to light engine install.

Simple plug-and-play connection between frame and light engine from below ceiling eliminates need for wiring between frame and LED driver, and also saves time during installation and future replacements/upgrades. Plug-and-play receptacle accommodates technology upgrade of light engines and replacements for the life of the building.

Drivers

- EldoLED ECoDrive Dali 1% Dimming

Rated life

60,000 hrs at 70% lumen maintenance based on IES LM-80-08 and TM-21-11.

Power over Ethernet

Powered via Lightolier PoE lighting controller:

Complies with FCC rules per Title 47 part 15 (Class A) for EMI / RFI (conducted & radiated). PoE lighting controller accessible from below ceiling.

Rated life

60,000 hrs at 70% lumen maintenance based on IES LM-80-08 and TM-21-11.

Optical systems

Comfort throughout the space:

Patented optical system combines primary and secondary optics to provide a true 50° physical cutoff and 45° reflected cutoff virtually eliminating the view of the light source and bright spots in the reflector. A new reflector curve reduces reflector brightness by up to 50% compared to existing products, allowing for the use of higher lumen packages in smaller apertures without creating bright spots in the ceiling.

Light Engine

Quick connect power pack comprised of light source and driver allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- Ease and upgradability of technology.

Options and Accessories

Flangeless mud-in ring: Use **CA6SFT** for use with flangeless installations.

Sloped ceilings: Compatible with sloped ceiling adapters (see **SCA** spec sheet).

Labels and Listings

- cULus listed for wet locations
- RoHS certified

Warranty




5 year limited warranty
Visit [Signify.com/warranties](https://www.signify.com/warranties) for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

C6STW Calculite LED 6" gen 3

Square Tunable White (with Dali driver)

Medium beam, 2500lm Engine, 101.6 lm/w

Candela Curve

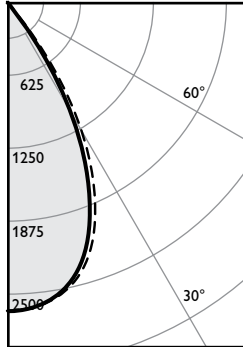

Frame: **C6SN or 6SN**
Engine: **C6L25835MZ10U**
Trim: **C6SDLNMCL**

CCT¹: 3500K
Output lumens: 2164 lms
Input watts: 21.3 W (±5%)
CRI: 80 min
Spacing Crit.: 0.9
Beam Angle: 55°

Zonal summary

Zone	Lumens	%Luminaire
0-30	1647	76.1%
0-40	2058	95.1%
0-60	2162	99.9%
0-90	2164	100.0%

Angle	0°	45°	Lms
0	2647	2647	
5	2624	2620	247
10	2539	2530	
15	2382	2348	654
20	2088	2101	
25	1615	1730	745
30	1058	1222	
35	563	723	411
40	249	326	
45	88	133	97
50	16	43	
55	3	9	7
60	2	1	
65	1	1	1
70	1	1	
75	1	0	1
80	1	0	
85	1	1	1
90	0	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	106	4.5'
6'	74	5.4'
7'	54	6.3'
8'	41	7.2'
9'	33	8.1'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	99.1	0.94
6'	65.0	0.62
7'	46.5	0.44
8'	38.7	0.37
9'	31.0	0.30

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 101.6 lm/w
Report²: F37167

Adjustment factors


Finish	CCT	Lumens
CL = 100%	80CRI 4000K = 102%	6000lm = 240%
CCL = 95%	80CRI 3500K = 100%	4800lm = 192%
CCD = 87%	80CRI 3000K = 97%	3500lm = 140%
CCZ = 63%	80CRI 2700K = 87%	2500lm = 100%
WH = 87%	90CRI 3000K = 77%	2000lm = 80%
BK = 57%	90CRI 2700K = 73%	1500lm = 60%
		1000lm = 40%

Coefficients of utilization

Ceiling	80%	70%	50%	30%	0%
Wall	70	50	30	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%				
Room Cavity Ratio	0	119	119	119	119
1	114	111	109	107	105
2	108	104	100	97	96
3	103	97	92	89	86
4	98	91	86	82	80
5	94	86	80	76	75
6	89	81	75	71	70
7	85	76	70	66	66
8	81	72	66	62	62
9	77	68	62	58	58
10	74	64	59	55	55

Wide beam, 2500lm Engine, 90.0 lm/w

Candela Curve

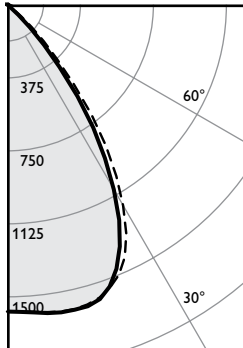

Frame: **C6SN or 6SN**
Engine: **C6L25835MZ10U**
Trim: **C6SDLWCL**

CCT¹: 3500K
Output lumens: 1917 lms
Input watts: 21.3 W (±5%)
CRI: 80 min
Spacing Crit.: 1.1
Beam Angle: 68°

Zonal summary

Zone	Lumens	%Luminaire
0-30	1225	63.9%
0-40	1726	90.1%
0-60	1914	99.9%
0-90	1917	100.0%

Angle	0°	45°	Lms
0	1573	1573	
5	1584	1581	151
10	1602	1603	
15	1601	1592	447
20	1538	1544	
25	1368	1428	627
30	1095	1190	
35	771	883	502
40	419	531	
45	165	266	176
50	23	96	
55	4	15	12
60	2	2	
65	1	1	1
70	1	1	
75	1	1	1
80	1	0	
85	1	1	1
90	0	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	63	5.5'
6'	44	6.6'
7'	32	7.7'
8'	25	8.8'
9'	19	9.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	86.6	0.94
6'	56.8	0.62
7'	40.6	0.44
8'	33.8	0.37
9'	27.1	0.30

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 90.0 lm/w
Report²: F37139

Adjustment factors

Finish	CCT	Lumens
CL = 100%	80CRI 4000K = 102%	6000lm = 240%
CCL = 95%	80CRI 3500K = 100%	4800lm = 192%
CCD = 87%	80CRI 3000K = 97%	3500lm = 140%
CCZ = 63%	80CRI 2700K = 87%	2500lm = 100%
WH = 87%	90CRI 3000K = 77%	2000lm = 80%
BK = 57%	90CRI 2700K = 73%	1500lm = 60%
		1000lm = 40%

Coefficients of utilization

Ceiling	80%	70%	50%	30%	0%
Wall	70	50	30	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%				
Room Cavity Ratio	0	119	119	119	119
1	113	110	108	106	104
2	107	102	98	95	94
3	102	95	90	86	83
4	96	88	82	78	77
5	91	82	76	71	71
6	86	76	70	66	65
7	81	71	65	61	61
8	77	67	61	56	56
9	73	63	56	52	52
10	69	59	53	49	49

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

