



# LuxSpace PoE

## DN560B LED12S/830 POE F WH

LuxSpace2 Mini Low height recessed - LED Module, system flux 1200 lm - 830 warm white - Luminaire controller with power over Ethernet - Facetted reflector - RJ45 connector - White RAL 9003

With Power-over-Ethernet (PoE) technology, LuxSpace PoE receives power and data over a single standard Ethernet cable, eliminating the need for separate power cabling. With the simple click of a connector, LuxSpace PoE luminaires become part of a complete, integrated connected lighting system, delivering extraordinary illumination experiences and value beyond illumination. A built-in lighting and control system gives office users personal control over their preferred light settings via a specially designed smartphone app. With integrated sensors, LuxSpace PoE luminaires can track activity patterns, daylight levels, and in the near future humidity, CO2, temperature, or other data. This data allows facility managers to gain deep insight into building operations, helping them optimize the delivery of resources, enhance the experience and performance of occupants, and support improved asset management.

### Product data

General information	
Lamp family code	LED12S [ LED Module, system flux 1200 lm]
Light source color	830 warm white
Cap-Base	- [ -]
Light source replaceable	No
Number of gear units	1 unit
Gear	-
Driver/power unit/transformer	Luminaire controller with power over Ethernet
Driver included	Yes

Optic type	Facetted reflector
Luminaire light beam spread	80°
Control interface	Power over Ethernet
Connection	RJ45 connector
Cable	-
Protection class IEC	Safety class III
Glow-wire test	Temperature 850 °C, duration 5 s
Flammability mark	For mounting on normally flammable surfaces

# LuxSpace PoE

CE mark	CE mark
ENEC mark	ENEC mark
UL mark	-
Warranty period	5 years
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	-
RoHS mark	-
Product family code	DN560B [ LuxSpace2 Mini Low height recessed]
Unified glare rating CEN	22

## Operating and Electrical

Input Voltage	48 to 54 V
Input Frequency	50 to 60 Hz
Inrush current	5 A
Inrush time	1 ms
Power Factor (Min)	1

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Housing Material	Aluminum die cast
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall height	72 mm
Overall diameter	164 mm
Color	White RAL 9003

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1200 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	130 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM <3
Initial input power	9.2 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L90

## Application Conditions


Ambient temperature range	+10 to +25 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

## Product Data

Full product code	871829194360000
Order product name	DN560B LED12S/830 POE F WH
EAN/UPC - Product	8718291943600
Order code	910503706673
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910503706673
Net Weight (Piece)	0.600 kg

# LuxSpace PoE

## Dimensional drawing

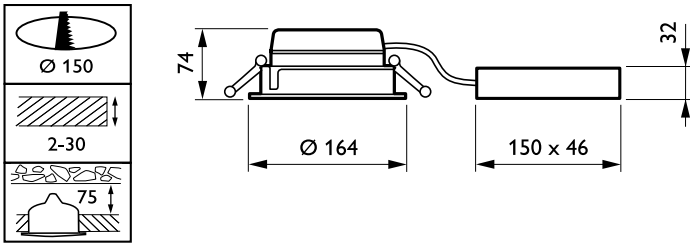

LuxSpace gen2 Mini DN560B-DN561C

