



Selenium LED

BGP340 LED92--3S/740 PSU I DM 48/60

Selenium LED, LED module 9200 lm, Power supply unit (On/Off), Distribution medium, Universal for diameter 48 to 60 mm

Selenium LED is a cost-effective road lighting LED luminaire, delivering significant energy saving compared with conventional solutions. Energy savings can be further enhanced with the range of integrated control options. Selenium LED delivers high quality neutral white light with excellent uniformity using Philips LEDGINE technology. Installation and maintenance is made simple using plug connectors and drivers that are directly accessible without the use of tools.

Product data

General Information			
Lamp family code	LED92 [LED module 9200 lm]	Embedded control	-
Light source replaceable	Yes	CE mark	Yes
Number of gear units	Unit	Warranty period	5 years
Driver included	Yes	Flammability mark	-
Photocell	-	ENEC mark	ENEC mark
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.	Glow-wire test	Temperature 960 °C, duration 5 s
Light source engine type	LED	EU RoHS compliant	No
Product family code	BGP340 [Selenium LED]	Light Technical	
Lighting Technology	LED	Upwards light output ratio	0
		Luminous Flux	7,906 lm
		Standard tilt angle post-top	0°
		Standard tilt angle side entry	0°
		Correlated Colour Temperature	4000 K
		Luminous efficacy (rated) (nom.)	111 lm/W
		Colour rendering index (CRI)	≥70
		Light source colour	740 neutral white

Selenium LED

Optical cover type	Flat glass
Luminaire light beam spread	160°
Optic type outdoor	Distribution medium

Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Inrush current	80 A
Inrush time	150 ms
Power Consumption	71 W
Power Factor (Fraction)	0.95
Connection	Screw connection block 3-pole
Cable	-
Number of products on MCB of 16 A type B	8

Temperature

Ambient temperature range	-30 to +45 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing material	Aluminium
Reflector material	-
Optic material	Glass
Optical cover/lens material	Glass
Fixation material	Stainless steel
Housing Colour	Aluminium and grey
Mounting device	Universal for diameter 48 to 60 mm
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	750 mm
Overall width	320 mm
Overall height	210 mm

Effective projected area	0.07 m²
Dimensions (height x width x depth)	210 x 320 x 750 mm

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	6/4 kV
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.380, 0.370) SDCM <3
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	7.5 %
Lumen maintenance at median useful life* 75000 h	L80


Application Conditions

Performance ambient temperature Tq	25 °C
------------------------------------	-------

Product Data

Order product name	BGP340 LED92--3S/740 PSU I DM 48/60
Full product name	BGP340 LED92--3S/740 PSU I DM 48/60
Full EOC	871829106345200
Order code	06345200
Material no. (12 NC)	910925438545
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718291063452
Numerator – packs per outer box	1
EAN/UPC – Case	8718291063452

Dimensional drawing

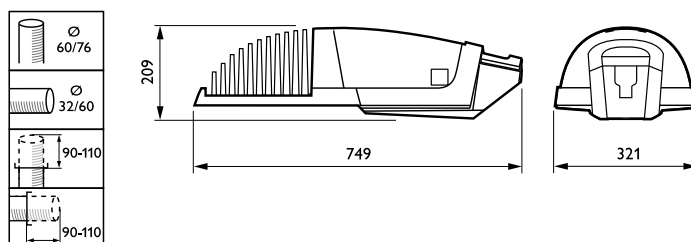

Selenium LED

