



Xitanium LED Driver Outdoor Fixed (US)

XITANIUM 100W 4.1A 24V 347-480V OTD

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability.

Product data


Operating and Electrical	
Input Frequency	50 to 60 Hz
Total Harmonic Distortion IEC (Max)	20 %
Output Current Ripple (Nom)	1 %
Maximum Efficiency	85 %
Power Factor 100% Load (Min)	0.9
Output Current (Nom)	4160 mA
Output Current Tolerance (Max)	5 %
Output Current Tolerance (Min)	-5 %
Input Voltage (AC)	347-480 V
Input Current (Max)	320 mA
Input Power (Nom)	117 W
Output Power (Nom)	100 W
Output Voltage	24 V
Wiring	
Connector Type Input Terminals	Wago 250
Output Wire Length	228.6 mm
Primary Fusing	Fused
Secondary Fusing	None Required
Input Wire Gauge	18
Output Wire Gauge	18
Temperature	
T-Ambient (Max)	55 °C
T-Ambient (Min)	-40 °C
T-Case Maximum (Max)	85 °C
Approval and Application	
Short Circuit Protection	Self-limited
Over Power Protection	Protected
Open Circuit Protection	Protected
EMI Standard	FCC 47 Subpart 15; Class A
Environmental Standard	UL Damp & Dry
Approval Marks	RoHS compliance UL certificate CSA certificate
Output Insulation	Yes
Product Data	
Full product code	871016319641100
Order product name	XITANIUM 100W 4.1A 24V 347-480V OTD

Xitanium LED Driver Outdoor Fixed (US)

EAN/UPC - Product	781087091616
Order code	929000702502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	929000702502
Net Weight (Piece)	912.000 g

Dimensional drawing

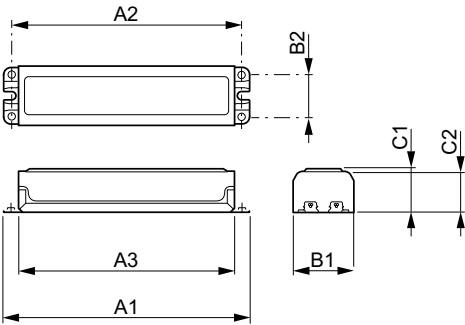

100W 24V 4.1A 347-480V Otd

Product	B2	C1	C2	A1	A2	A3	B1
XITANIUM 100W 4.1A 24V	42.9	40.1	37.7	240.5	226.3	211.1	59.2
347-480V OTD	mm	mm	mm	mm	mm	mm	mm

