



# MASTER SDW-T



## MASTER SDW-T 50W/825 PG12-1 1SL/12

Range of high-efficiency, discharge lamps with warm colour to be used in open luminaires

### Warnings and Safety

- Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	PG12-1
Operating position	UNIVERSAL [Any or Universal (U)]
Flux measurement reference	Sphere
Life to 50% failures (nom.)	15,000 h
Useful life (nom.)	10,000 h
Light Technical	
Colour Code	825 [CCT of 2500K]
Luminous Flux	2,500 lm
Colour designation	Golden White
Chromaticity Coordinate X (Nom)	0.478
Chromaticity Coordinate Y (Nom)	0.415
Correlated Colour Temperature (Nom)	2500 K
Luminous efficacy (rated) (nom.)	45.45 lm/W
Colour rendering index (CRI)	82
Arc Length O (Nom)	16 mm


Operating and Electrical	
Power Consumption	55.5 W
Voltage (nom.)	90 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear
Bulb material	Soft Glass
Bulb shape	T31
Net Weight (Piece)	0.048 kg
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	7.6 mg
Mercury (Hg) content (nom.)	7.6 mg
Energy consumption kWh/1,000 hours	56 kWh

# MASTER SDW-T

EPREL Registration Number	473396
<b>Product Data</b>	
Order product name	MASTER SDW-T 50W/825 PG12-1 1SL/12
Full product name	MASTER SDW-T 50W/825 PG12-1 1SL/12
Full EOC	871150073403715
Order code	928153909227
Material no. (12 NC)	928153909227


Local order code	50SDWT
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500734037
Numerator – packs per outer box	12
EAN/UPC – Case	8711500183149

## Dimensional drawing

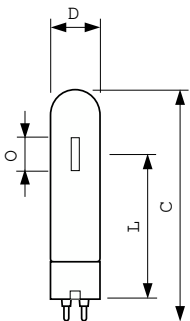


Product	D (max)	O	L	C (max)
MASTER SDW-T 50W/825 PG12-1 1SL/12	32 mm	15.4 mm	91 mm	149 mm

## Photometric data

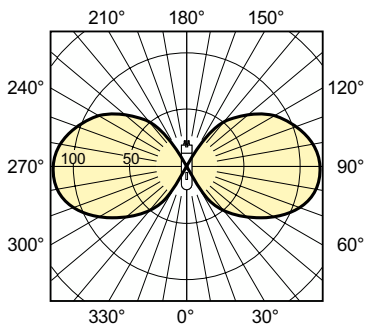



Light Distribution Diagram - MASTER SDW-T 50W/825 PG12-1 1SL/12

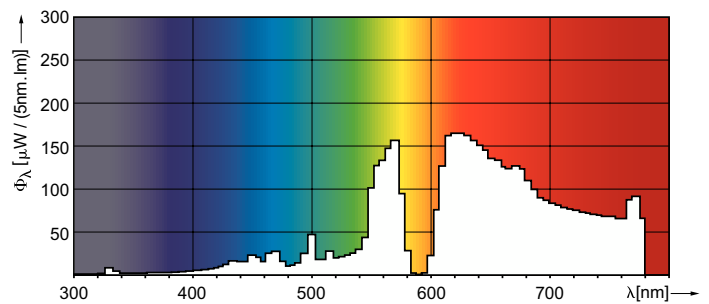

Spectral Power Distribution Colour - MASTER SDW-T 50W/825 PG12-1 1SL/12

# MASTER SDW-T

## Lifetime

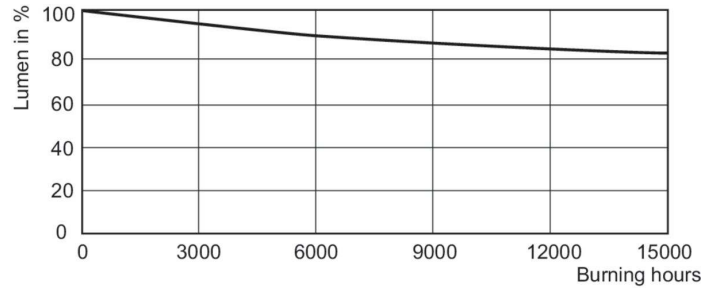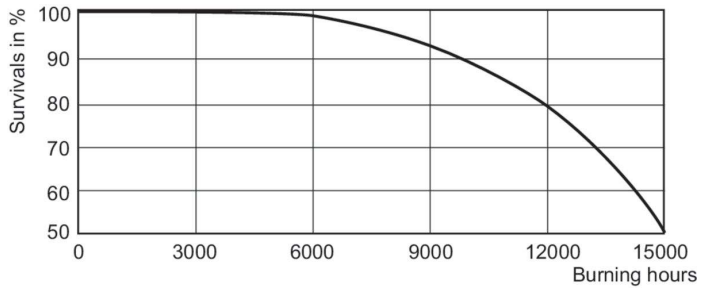

LDLE\_SDW-T\_35W\_50W\_825-Life expectancy diagram

Lumen Maintenance Diagram - MASTER SDW-T 50W/825 PG12-1 1SL/12

