



Essential LEDspot MR16

ESS LEDspot 5W 400lm GU5.3 827 220V

Essential LEDspots MR16 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16 deliver significant energy savings and minimize initial investment.

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal lifetime	10,000 hour(s)
Switching Cycle	50,000
Rated Lifetime (Hours)	10,000 hour(s)
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	727 [CCT of 2700K]
Color Code	727 [CCT of 2700K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	400 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	80.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	0.9


Photobiological safety according to EN 62471 RG1	
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	42 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

Essential LEDspot MR16

Bulb Shape	MR16 [2inch/50mm]
Approval and Application	
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	5 kWh
EyeComfort	Yes
Product Data	
Order product name	ESS LEDspot 5W 400lm GU5.3 827 220V
Full product name	ESS LEDspot 5W 400lm GU5.3 827 220V



Full product code	871951430239600
Order code	929001844587
Material Nr. (12NC)	929001844587
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514302396
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514302402

Dimensional drawing



Product	D	C
ESS LEDspot 5W 400lm GU5.3 827 220V	50.5 mm	46.5 mm

Photometric data

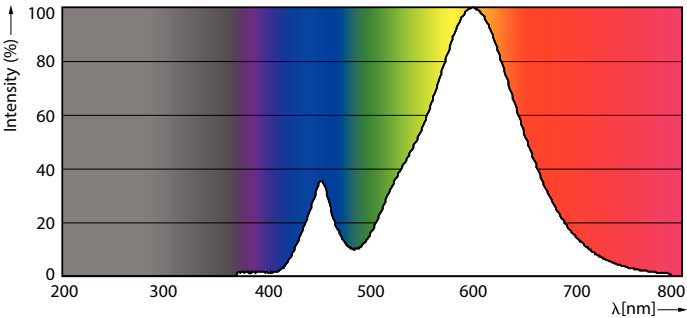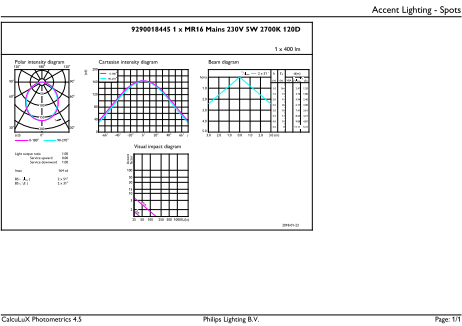


Accent Lighting Spots - ESS LEDspot 5W 400lm GU5.3 827 220V

Spectral Power Distribution Colour - ESS LEDspot 5W 400lm GU5.3 827 220V


Essential LEDspot MR16

Photometric data




Light Distribution Diagram - ESS LEDspot 5W 400lm GU5.3 827 220V

Lifetime

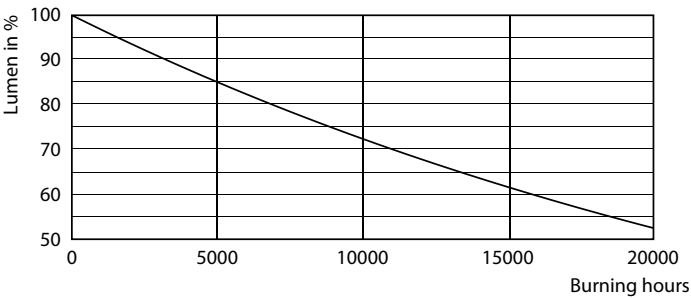

Lumen Maintenance Diagram - ESS LEDspot 5W 400lm GU5.3 827 220V

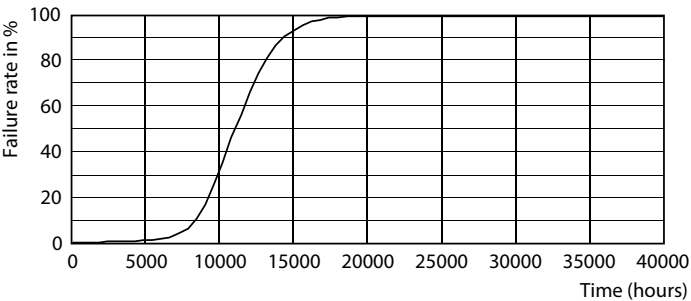

Life Expectancy Diagram - ESS LEDspot 5W 400lm GU5.3 827 220V

