PHILIPS Lighting



For top performance and sustainability

MASTER LEDspot ExpertColor MV

MASTER LEDspot ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. They offer superior lighting that has a customized spectrum, high CRI, and deep dimming feature. What's more the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, with MASTER LEDspot ExpertColor you can take advantage of the full ExpertColor family, which also includes LEDspot MR16, LEDspot AR111 and LEDspot PAR lamps. MASTER LEDspot ExpertColor delivers huge energy savings and minimizes maintenance costs without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within a short time period.

Benefits

- \cdot Create a warm and comfortable ambience with MASTER LED GU10
- Hassle-free retrofit solution for greater energy efficiency and sustainability
- Interior decor, furnishings and fabrics look great

Features

- Customized color spectrum replicates halogen light color
- Best-in-class color realization CRI97, R9>85
- Retrofittable with main-voltage GU10 halogen lamps
- Deep and smooth dimming with broad transformer compatibility

Application

- \cdot Hospitality
- Retail
- Residential


MASTER LEDspot ExpertColor MV

Versions



MASTER LEDspot ExpertColor MV 35W GU10 25D

Dimensional drawing




Product	D	с
MAS LED ExpertColor 5.5-50W GU10 927 36D	50 mm	54 mm
MAS LED ExpertColor 5.5-50W GU10 930 36D	50 mm	54 mm

MASTER LEDspot ExpertColor MV

General Information	
Cap-Base	GU10
Switching Cycle	50,000
Nominal lifetime	40,000 hour(s)
Light Technical	
Beam Angle (Nom)	36 degree(s)
Color rendering index (CRI)	97
LLMF At End Of Nominal Lifetime	70 %
(Nom)	
Luminous Intensity (Nom)	800 cd
Operating and Electrical	
Input Frequency	50 to 60 Hz
Line Frequency	50 to 60 Hz
Power Consumption	5.5 W
Starting Time (Nom)	0.5 s
Wattage Equivalent	50 W
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	PAR16
Approval and Application	
Energy Consumption kWh/1000 h	6 kWh


Light Technical

		Correlated Color				
Order Code	Full Product Name	Temperature (Nom)	Color Code	Luminous Flux		
929001347308	MAS LED ExpertColor 5.5-50W GU10 927 36D	2700 K	927	385 lm		
929001347408	MAS LED ExpertColor 5.5-50W GU10 930 36D	3000 K	930	405 lm		

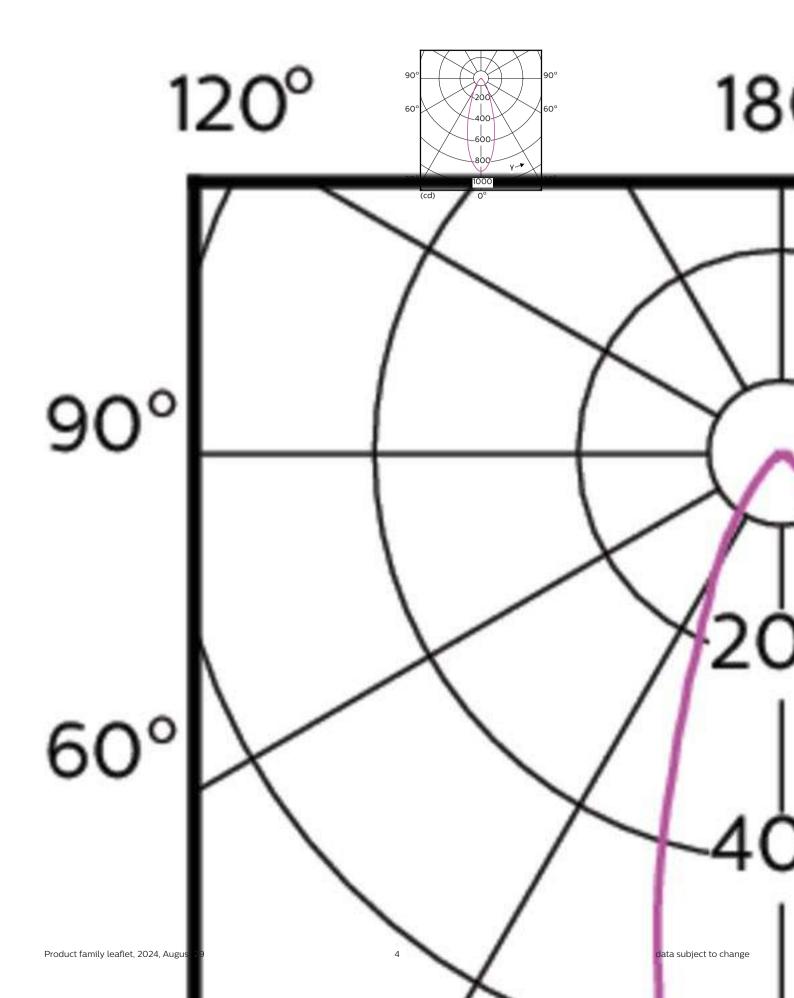


MASTER LEDspot ExpertColor MV

Accent Diagrams




Accent Diagram - MAS LED ExpertColor 5.5-50W GU10 927 36D



Accent Diagram - MAS LED ExpertColor 5.5-50W GU10 930 36D

Beam Diagrams



h(m)			¹ / ₂ I _{max} 2 x 17°			h	Eo	d(m)			
11(11)							(m)	(lx)	VBA	1/2Imax	¹ / ₂ E0
1.0				\backslash			1.0	885		0.61	0.57
							1.5	393		0.92	0.86
2.0							2.0	221		1.22	1.15
							2.5	142		1.53	1.43
3.0			/				3.0	98		1.83	1.72
							3.5	72		2.14	2.01
4.0		/					4.0	55		2.45	2.29
5.0							4.5	44		2.75	2.58
3.0 2.0 1.0 0.0 1.0 2.0 3.0 (m)											

Beam diagram - MAS LED ExpertColor 5.5-50W GU10 927 36D Beam diagram - MAS LED ExpertColor 5.5-50W GU10 930 36D



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.

www.lighting.philips.com 2024, August 29 - data subject to change