



LuxSpace square, recessed – high efficiency, visual comfort and a stylish design

LuxSpace square, recessed

Customers are looking to optimise all their resources, and that means not just their running costs (energy, etc.) but also their human resources. Energy savings are therefore a priority, but they must not have an adverse effect on the well-being of employees, who need a pleasant environment in order to be more productive, or on customers, who want to enjoy their shopping experience. LuxSpace provides the perfect combination of efficiency, light comfort and design, without compromising on lighting performance (colour rendering and colour uniformity). It offers a wide choice of options for creating the desired ambience, no matter the application.

Benefits

- Best-in-class efficacy
- Creates a gentle, natural light, ensuring visual comfort
- Perfect integration with the ceiling thanks to the thin, narrow rim; rimless version ideal for integration into plaster ceilings

LuxSpace square, recessed


Features

- Choice of four optics: high-gloss, faceted, matt and white
- Rim colours: high-gloss metalised, white (RAL9003), grey (RAL 9006), black (RAL9004) as standard
- Rimless version available ideal for integration into plaster ceilings
- Compliant for central emergency lighting with DC
- Multiple additional options: emergency lighting (single battery 3 hours), through-wiring

Application

- Offices
- Retail
- Hospitals
- Hotels
- Airports

Dimensional drawing

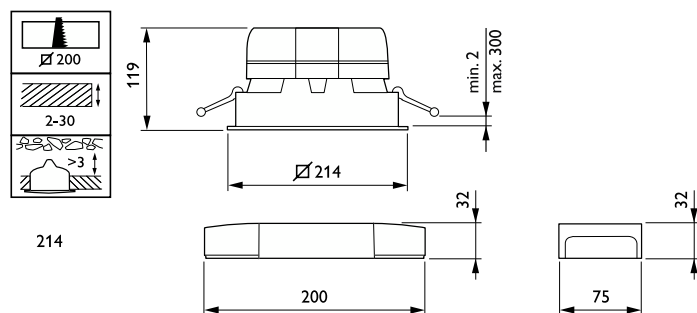

LuxSpace square, recessed

General Information

Driver included	Yes
Light source replaceable	No
Number of gear units	Unit
Service Tag	Yes

Light Technical

Correlated Colour Temperature (Nom)	4000 K
Colour rendering index (CRI)	>80
Optic type	-

Operating and Electrical

Protection class IEC	Safety class II
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Suitable for random switching	Yes

Mechanical and Housing

Housing Colour	White
Mech. impact protection code	IK02
Ingress protection code	IP20

Approval and Application

Ambient temperature range	+10 to +25 °C
CE mark	Yes
ENEC mark	ENEC mark
Flammability mark	For mounting on normally flammable surfaces
Glow-wire test	Temperature 650 °C, duration 30 s

Initial Performance (IEC Compliant)

Initial chromaticity	(0.38, 0.38) SDCM <2
Luminous flux tolerance	+/-10%

Product Data

Product family code	DN572B
---------------------	--------

Light Technical

Order Code	Full Product Name	Luminous efficacy (rated) (nom.)	Luminous Flux
97073400	DN572B LED12S/840 PSU-E C WH	141 lm/W	1,300 lm
97075800	DN572B LED12S/840 DIA-VLC-E C WH	141 lm/W	1,300 lm
97077200	DN572B LED20S/840 PSU-E C WH	149 lm/W	2,200 lm
97079600	DN572B LED20S/840 DIA-VLC-E C WH	149 lm/W	2,200 lm

Operating and Electrical

Order Code	Full Product Name	Power Consumption
97073400	DN572B LED12S/840 PSU-E C WH	9.2 W
97075800	DN572B LED12S/840 DIA-VLC-E C WH	9.2 W


Order Code	Full Product Name	Power Consumption
97077200	DN572B LED20S/840 PSU-E C WH	14.8 W
97079600	DN572B LED20S/840 DIA-VLC-E C WH	14.8 W

Controls and Dimming


Order Code	Full Product Name	Dimmable	Maximum dim level
97073400	DN572B LED12S/840 PSU-E C WH	No	-
97075800	DN572B LED12S/840 DIA-VLC-E C WH	Yes	1%

Order Code	Full Product Name	Dimmable	Maximum dim level
97077200	DN572B LED20S/840 PSU-E C WH	No	-
97079600	DN572B LED20S/840 DIA-VLC-E C WH	Yes	1%


Polar Wide Diagrams

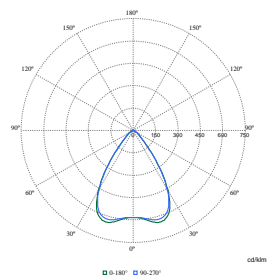


Polar Normal (separate) - DN572BI -
910505100950

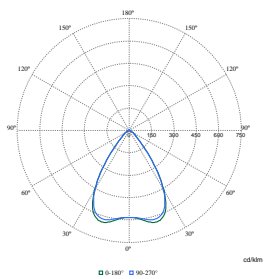

Polar Normal (separate) - DN572BI -
910505100948

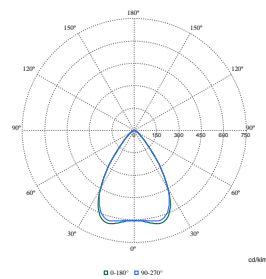

Polar Normal (separate) - DN572BI -
910505100944

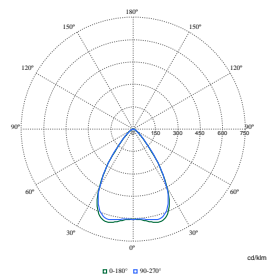

Polar Normal (separate) - DN572BI -
910505100946

