



Classic LEDspotLV

LEDClassic 5-50W MR16 840 60D 2pack

LEDspotLV Classic offers an archetypal halogen-like design while delivering the benefits of LED technology, saving around 85% on energy consumption, minimizing maintenance cost, and much more besides. It is compatible with most existing fixtures with a GU 5.3 holder and is designed as a retrofit replacement for halogen or incandescent spots.

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Rated Lifetime (Hours)	15,000 hour(s)
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	60 degree(s)
Luminous Flux	410 lm
Luminous Intensity (Nom)	420 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	- Hz

Input Frequency	- Hz
Power Consumption	5 W
Lamp Current (Nom)	580 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	ac electronic 12 V
Voltage (Nom)	12 V
Temperature	
Ambient temperature range	-20 to +40 °C
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	MR16


Datasheet, 2023, July 10 data subject to change

Classic LEDspotLV

Approval and Application		
Suitable For Accent Lighting	Yes	
Energy Consumption kWh/1000 h	6 kWh	
EyeComfort	Yes	
Product Data		
Order product name	LEDClassic 5-50W MR16 840 60D 2pack	
Full product name	LEDClassic 5-50W MR16 840 60D 2pack	
Full product code	871869969107300	


Order code	929001280592
Material Nr. (12NC)	929001280592
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699691073
Numerator - Packs per outer box	10
EAN/UPC - Case	8718699691080


Dimensional drawing



Product	D	С
LEDClassic 5-50W MR16 840 60D 2pack	50.5 mm	45.5 mm

Photometric data

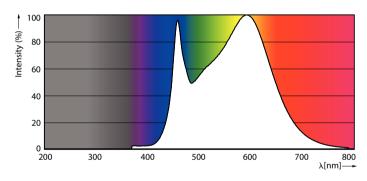




180°

120°

Spectral Power Distribution Colour - LEDClassic 5-50W MR16 840 60D 2pack

Light Distribution Diagram - LEDClassic 5-50W MR16 840 60D 2pack


120°




Accent Lighting Spots - LEDClassic 5-50W MR16 840 60D 2pack

Classic LEDspotLV

Lifetime

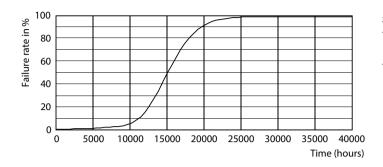



Life Expectancy Diagram - LEDClassic 5-50W MR16 840 60D 2pack

Lumen Maintenance Diagram

